

BICEPS



NEW!

BICEPS 4S



BOLLARD



LIGHT COLUMN

BICEPS

- BOLLARD
- LIGHT COLUMN

BICEPS light column and bollard provide low-glare illumination for walkways, parks, and open spaces.

Featuring COB and SMD LED options, they ensure precise, glare-free lighting.

Built with impact-resistant aluminum, they offer versatile configurations and a stylish design, perfect for modern landscapes.


BICEPS 2S



BICEPS 2S



NEW! BICEPS 4S

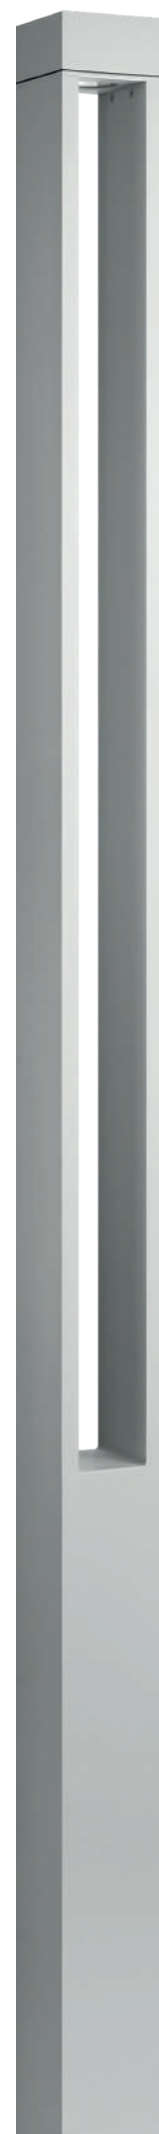

www.unilamp.co.th/en/p/biceps



Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color






***Custom colors are available on request.*

BICEPS




BICEPS

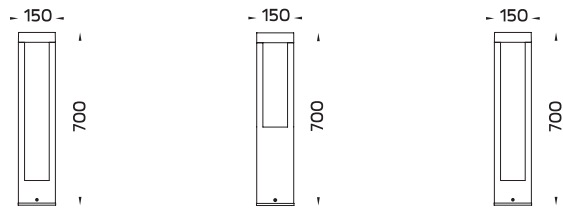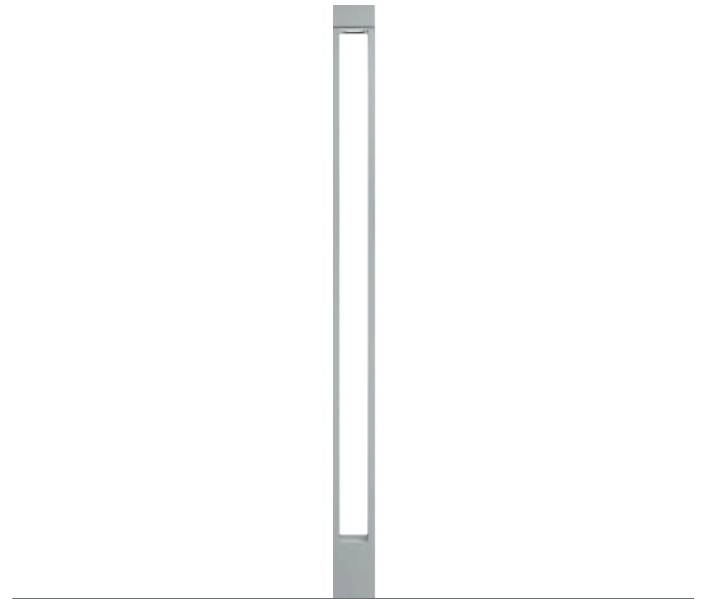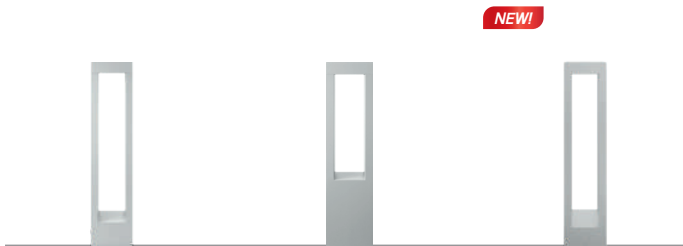

OD-7179

OD-7180

OD-7812



BICEPS

Application Type : Bollard
Subgroup : Shielded bollard

BICEPS 2S / 7179

BICEPS 2S / 7180

BICEPS 4S / 7812

NEW!

Luminaire Performance

320 - 800 lm

10 - 25 W

29 - 58 lm/W

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-Off/ DALI
On-Off (AC LED)

Input Options

220-240Vac 50/60Hz

Accessories



Anchor bolt



IP68 Connector

BICEPS

Application Type : Light column
Subgroup : Urban accent / Urban area

BICEPS 2S / 7710

Luminaire Performance

1500 - 2780 lm

38 - 57 W

34 - 48 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ 1-10V

Input Options

220-240Vac 50/60Hz









Accessories



Anchor bolt



IP68 Connector

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code		
													
BICEPS 25		10 W	N/A	4000 K	390 lm	39 lm/W		•			7179-0-3-870-XX		
		11 W	N/A	3000 K	380 lm	34 lm/W		•			7179-0-3-869-XX		
		20 W	N/A	3000 K	750 lm	37 lm/W		•				7179-0-3-873-XX	
				4000 K	790 lm	39 lm/W		•				7179-0-3-874-XX	
BICEPS 45		10 W	N/A	4000 K	330 lm	33 lm/W		•			7180-0-3-870-XX		
		11 W	N/A	3000 K	320 lm	29 lm/W		•			7180-0-3-869-XX		
		20 W	N/A	3000 K	630 lm	31 lm/W		•				7180-0-3-873-XX	
				4000 K	660 lm	33 lm/W		•				7180-0-3-874-XX	
		25 W	N/A	3000 K	800 lm	32 lm/W	•			•	7180-0-3-902-XX		
			3000 K	800 lm	32 lm/W				•	7180-0-5-902-XX			
BICEPS 45		10 W	N/A	3000 K	570 lm	57 lm/W		•			7812-0-3-869-XX		
				4000 K	580 lm	58 lm/W		•				7812-0-3-870-XX	
BICEPS 25		38 W	N/A	3000 K	1790 lm	47 lm/W	•				7710-0-3-888-XX		
				43 W	T4	3000 K	1500 lm	34 lm/W	•				7710-K-3-535-XX
						4000 K	1520 lm	35 lm/W	•				7710-T-3-536-XX
		57 W	N/A	3000 K	2650 lm	46 lm/W	•					7710-0-3-903-XX	
				4000 K	2780 lm	48 lm/W	•					7710-0-3-906-XX	
				2700 K	2200 lm	38 lm/W			•			7710-0-4-507-XX	
				3000 K	2650 lm	46 lm/W			•			7710-0-4-903-XX	

*Please contact sales team for special request.

Application Reference

