

CYCLOPS

■ BOLLARD

CYCLOPS family is an innovative walkway lighting solution with shielded light sources. Delivering light exactly where it is needed without disruptive glare. Operated with multiple LED with built in heat sink. The light is precisely controlled by carefully designed lenses and is directed onto the illuminated surface. The vandal resistant clear polycarbonate cover protects the bollard from harmful impact, dust and water. **CYCLOPS** is available in two sizes and two heights with 180 and 360-degree light distribution. **CYCLOPS** can be installed in residential areas, walkways, parks, commercial areas and open spaces. It provides illumination for modern architectural environment as well as being an eye-catching object. Pre-wired cables and a twist-locking mechanism ensure an easy installation. **CYCLOPS** can be customized to required heights. The anchorage unit for concrete foundation is available as an accessory.



www.unilamp.co.th/en/p/cyclops



Supalai Lite Thaphra – Wongwian Yai, Bangkok – THAILAND



Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Polycarbonate protective cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color




****Custom colors are available on request.**

CYCLOPS



Mini CYCLOPS /
Mini CYCLOPS – CVDA

Mini CYCLOPS Short /
Mini CYCLOPS Short – CVDA

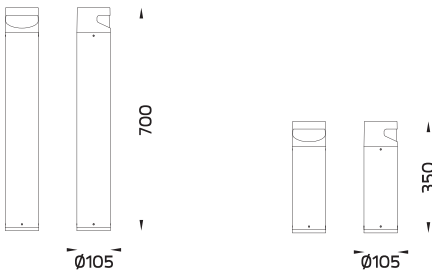

Phoneix Market City Mall, Pune – INDIA

Mini CYCLOPS


Application Type : Bollard
Subgroup : Semi shielded bollard

Mini CYCLOPS / 7175
Mini CYCLOPS – CVDA / 7175
Mini CYCLOPS Short / 7176
Mini CYCLOPS Short – CVDA / 7176

Luminaire Performance

210 – 1090 lm
7.5 – 14 W
26 – 77 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ On-Off / DALI / DALI

Input Options

220–240Vac 50/60Hz
24Vdc

Accessories



Anchor bolt



IP68 Connector



CV Driver




CYCLOPS

CYCLOPS – DS

CYCLOPS Short

CYCLOPS Short – DS

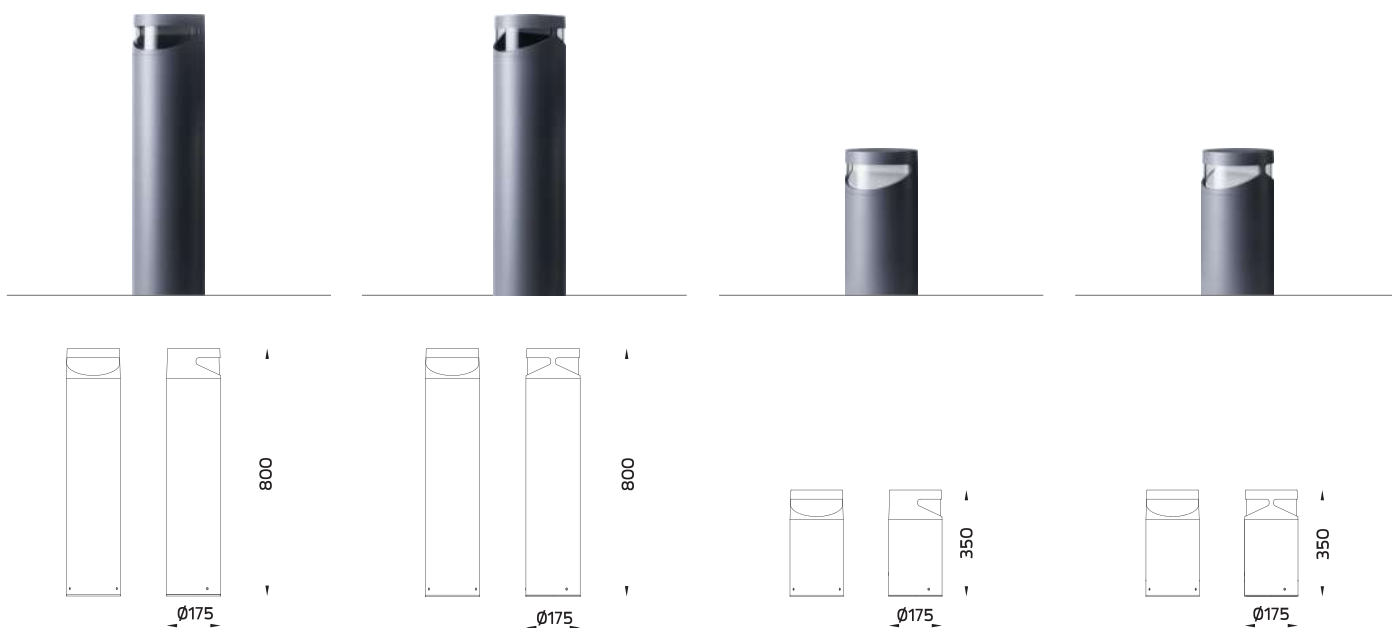

CYCLOPS


Application Type : Bollard
Subgroup : Semi shielded bollard

CYCLOPS / 7171
CYCLOPS – DS / 7172
CYCLOPS Short / 7173
CYCLOPS Short – DS / 7174

Luminaire Performance

340 – 1500 lm
10 – 25 W
30 – 60 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ 1-10V/ DALI

Input Options

220-240Vac 50/60Hz

Accessories













Anchor bolt



IP68 Connector

CYCLOPS

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code		
													
Mini CYCLOPS CVDA		7.5 W	Forward throw	3000 K	210 lm	28 lm/W	•				7175-K-3-546-XX		
			Side throw	3000 K	290 lm	38 lm/W	•				7175-I-3-546-XX		
		8.4 W	Forward throw	3000 K	290 lm	34 lm/W		•			7175-K-7-656-XX		
			Side throw	3000 K	400 lm	47 lm/W		•			7175-I-7-656-XX		
		11 W	Forward throw	2700 K	290 lm	26 lm/W	•				7175-K-3-676-XX		
				3000 K	290 lm	26 lm/W	•				7175-K-3-544-XX		
				2700 K	290 lm	26 lm/W				•	7175-K-5-676-XX		
			Side throw	2700 K	400 lm	36 lm/W	•				7175-I-3-676-XX		
				3000 K	400 lm	36 lm/W	•				7175-I-3-544-XX		
				4000 K	420 lm	38 lm/W	•				7175-I-3-545-XX		
				3000 K	400 lm	36 lm/W				•	7175-I-5-544-XX		
		Mini CYCLOPS Short/ Short – CVDA		7.5 W	Forward throw	3000 K	550 lm	73 lm/W	•				7176-K-3-546-XX
4000 K	440 lm				58 lm/W	•				7176-K-3-547-XX			
Side throw	3000 K			470 lm	62 lm/W	•				7176-I-3-546-XX			
	3000 K			760 lm	69 lm/W	•				7176-K-3-544-XX			
11 W	Forward throw			4000 K	790 lm	71 lm/W	•				7176-K-3-545-XX		
				3000 K	760 lm	69 lm/W				•	7176-K-5-544-XX		
Side throw	3000 K			640 lm	58 lm/W	•				7176-I-3-544-XX			
	3000 K			1090 lm	77 lm/W			•		7176-K-7-654-XX			
CYCLOPS				10 W	Forward throw	3000 K	380 lm	38 lm/W	•				7171-0-3-897-XX
						4000 K	400 lm	40 lm/W	•				7171-0-3-898-XX
		Side throw	4000 K	340 lm	34 lm/W	•				7171-I-3-898-XX			
			2700 K	720 lm	37 lm/W	•				7171-K-3-567-XX			
		19 W	Forward throw	3000 K	720 lm	37 lm/W	•				7171-K-3-569-XX		
				4000 K	760 lm	40 lm/W	•				7171-K-3-571-XX		
				3000 K	720 lm	37 lm/W				•	7171-K-4-569-XX		
				4000 K	760 lm	40 lm/W				•	7171-K-4-571-XX		
				2700 K	720 lm	37 lm/W				•	7171-K-5-567-XX		
				3000 K	720 lm	37 lm/W				•	7171-K-5-569-XX		
		19 W	Side throw	3000 K	620 lm	32 lm/W	•				7171-I-3-569-XX		
				4000 K	660 lm	34 lm/W	•				7171-I-3-571-XX		
				4000 K	660 lm	34 lm/W				•	7171-I-5-571-XX		
		CYCLOPS DS		19 W	Forward throw	2700 K	600 lm	31 lm/W	•				7172-0-3-523-XX
3000 K	600 lm					31 lm/W	•				7172-0-3-897-XX		
4000 K	650 lm					34 lm/W	•				7172-0-3-898-XX		
Side throw	3000 K			570 lm	30 lm/W	•				7172-I-3-897-XX			
	3000 K			1170 lm	46 lm/W	•				7172-K-3-570-XX			
25 W	Forward throw			3000 K	1170 lm	46 lm/W				•	7172-K-5-570-XX		
				3000 K	1100 lm	44 lm/W	•				7172-I-3-570-XX		
25 W	Side throw			4000 K	1170 lm	46 lm/W	•				7172-I-3-572-XX		
				4000 K	1170 lm	46 lm/W				•	7172-I-4-572-XX		
				3000 K	1100 lm	44 lm/W				•	7172-I-5-570-XX		
				3000 K	1100 lm	44 lm/W				•	7172-I-5-570-XX		
CYCLOPS Short				10 W	Forward throw	2700 K	470 lm	47 lm/W	•				7173-0-3-523-XX
		3000 K	470 lm			47 lm/W	•				7173-0-3-897-XX		
		4000 K	500 lm			50 lm/W	•				7173-0-3-898-XX		
		19 W	Forward throw	2700 K	1020 lm	53 lm/W	•				7173-K-3-567-XX		
				3000 K	1020 lm	53 lm/W	•				7173-K-3-569-XX		
		Side throw	4000 K	1060 lm	55 lm/W	•				7173-I-3-571-XX			
			4000 K	1060 lm	55 lm/W				•	7173-I-5-571-XX			
			4000 K	1060 lm	55 lm/W				•	7173-I-5-571-XX			
CYCLOPS Short – DS		19 W	Forward throw	3000 K	790 lm	41 lm/W	•				7174-0-3-897-XX		
				4000 K	840 lm	44 lm/W	•				7174-0-3-898-XX		
				3000 K	780 lm	41 lm/W	•				7174-I-3-897-XX		
		Side throw	2700 K	1500 lm	60 lm/W	•				7174-K-3-568-XX			
			3000 K	1500 lm	60 lm/W	•				7174-K-3-570-XX			
		25 W	Forward throw	3000 K	1500 lm	60 lm/W				•	7174-K-4-570-XX		
				2700 K	1500 lm	60 lm/W				•	7174-K-5-568-XX		
				3000 K	1500 lm	60 lm/W				•	7174-K-5-568-XX		
		25 W	Side throw	3000 K	1490 lm	59 lm/W	•				7174-I-3-570-XX		

*Please contact sales team for special request.

