


Underwater

LIGHTING SERIES



ATOM



VOLGA



ACQUA



VAREE



SIRIUS




ATOM is a ground recess indicator light and is also suitable for underwater light application. ATOM has been designed and manufactured at highest attribute. Utilizing CNC lathed stainless steel body presented exceptional aesthetic as well as sleek tough feeling. LED chips and lenses are from world renowned manufacturers. GFR polymer recess kit allows it to be installed in most extreme environment. Ensuring integrity of manufacture ATOM is supplied with a factory fitted pre-wired cable for ease of installation. The Anti-Humidity kit eliminate condensation inside the housing and prolong the life time of the luminaire. An optional IP68 connectors is recommended as an accessory for trouble free installation.


Specification

- Designed, Manufactured and Tested according to IEC 60598
- Marine grade 316 stainless steel body and screws.
- GFR polymer recess housing.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- Remote driver – constant current / constant voltage.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.
- For ground recess application, the water drainage system must be tested to ensure that it is working sufficiency and efficiency.

ATOM CC Spotlight /
ATOM CV Spotlight

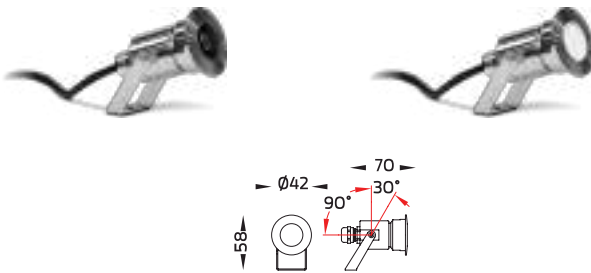

ATOM CC Wall Recess Underwater /
ATOM CV Wall Recess Underwater

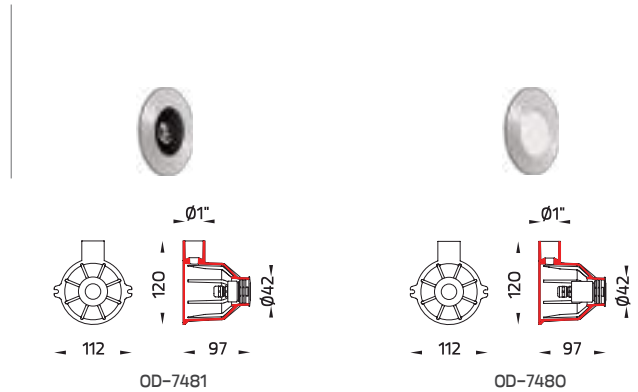

ATOM

SPOTLIGHT / UNDERWATER SPOTLIGHT

ATOM – CC Spotlight / 5980

ATOM – CV Spotlight / 5981

ATOM – CC Wall Recess Underwater / 7481

ATOM – CV Wall Recess Underwater / 7480

Luminaire Performance

8 – 310 lm

2.1 – 3.3 W

3 – 93 lm/W

Beam Options




Color Temperature


2700K/ 3000K/ 4000K/ Red/ Green/ Blue

Controller

N/A

Accessories

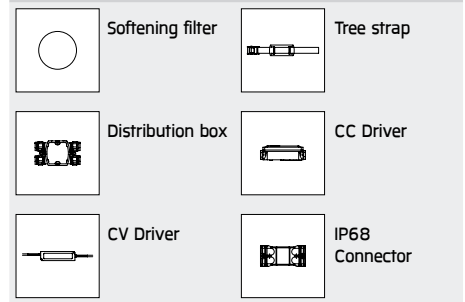



VOLGA is a family of robust marine grade stainless steel luminaires suitable for underwater and ground and well recessed mounting. It utilizes high power LED in available with different color temperatures. The high quality optical lenses offering beams from ultra-narrow to wide and asymmetric light distributions.


VOLGA is a perfect choice to illuminate swimming pools, decorative pools and fountains and narrow columns. The luminaire is supplied with pre-wired cable, anti-humidity kit and is fully sealed from the factory. The underwater version must be operated submersed in water at all time in order to prevent over-heating of the luminaire. VOLGA inground and wall recessed is suitable for in air operation. The marine grade 316 stainless steel body guarantees corrosion free appearance throughout the lifetime.

We highly recommend that the luminaire lay out should be considered during specifying and planning processes. Installation work must be carried out under national safety regulations.


Specification

- Designed, Manufactured and Tested according to IEC 60598.
- Marine grade 316 stainless steel body and screws.
- GFR polymer recess housing.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- Remote driver – constant current or constant voltage (available separately).
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.
- To avoid over-heating, this luminaire must be used underwater only.

VOLGA/1 – CC Ground Mount / VOLGA/1 – CV Ground Mount NEW!

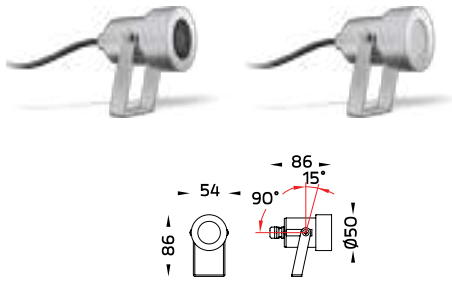

VOLGA/1 – CC Wall Recess Underwater / VOLGA/1 – CV Wall Recess Underwater NEW!

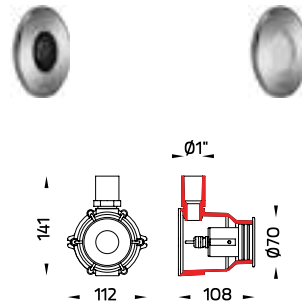

VOLGA

UNDERWATER SPOTLIGHT

- VOLGA/1 – CC Ground Mount / 7431
- VOLGA/1 – CV Ground Mount / 7430
- VOLGA/1 – CC Wall Recess Underwater / 7419
- VOLGA/1 – CV Wall Recess Underwater / 7418

Luminaire Performance

35 – 430 lm
2.2–5.8 W
6 – 90 lmW

Beam Options




Color Temperature

2700K/ 3000K/ 4000K

Controller

N/A

Accessories

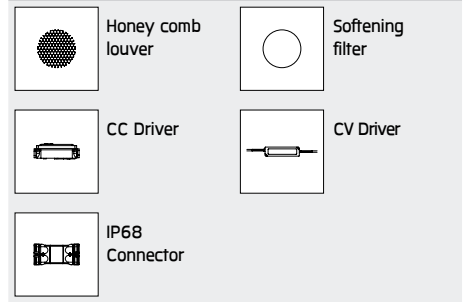




A family of recessed and surface mounted underwater luminaires which are commonly used to illuminate swimming pools, decorative pools and fountains. Accessories include several watertight connecting devices.

ACQUA utilizes high power LED in 3000K or 4000K and high quality optical lenses offering narrow, medium and wide light distributions. To avoid installation issues and add another level of safety, ACQUA is pre-wired and is fitted with an anti condensation device. ACQUA must be operated in a submersible state at all time to protect an over-heating of the luminaire body. The marine grade 316 stainless steel body guarantees corrosion free appearance through out the life time. We highly recommend that the luminaire lay out should be considered during specifying and planning processes. Installation work must be carried out under national safety regulations.


Specification

- Designed, Manufactured and Tested according to IEC 60598.
- Marine grade 316 stainless steel body and screws.
- GFR polymer recess housing.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- Remote driver – constant current (available separately).
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.
- To avoid over-heating, this luminaire must be used underwater only.

ACQUA/1 **NEW!** Ground Mount CV

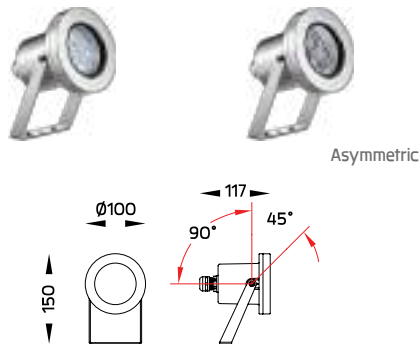

ACQUA/1 **NEW!** Wall Recess CV

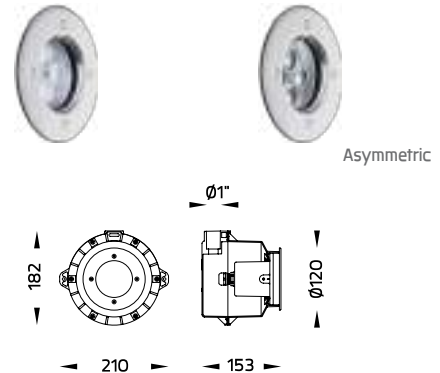


ACQUA UNDERWATER SPOTLIGHT

ACQUA/1 – Wall Recess CV / 7416
ACQUA/1 – Ground Mount CV / 7417

Luminaire Performance

760 – 1220 lm
12 W
63 – 101 lm/W

Beam Options




Color Temperature


2700K/ 3000K/ 4000K

Controller

N/A

Accessories

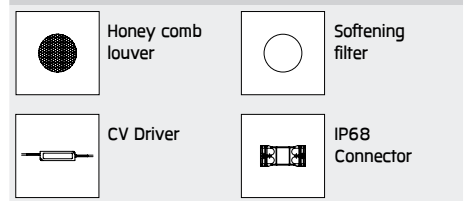



VAREE A family of LED underwater luminaires that are suitable to be installed on the ground, recess in a concrete wall or surface mounted. Operating with high lumen output LED from 2700K, 3000K or 4000K with high CRI in 3 steps SDCM.


VAREE is designed to illuminate swimming pools, decorative pools, fountains and any submersible application. A wide range of beam angles including Narrow, Medium, Wide and Elliptical beams as well as Asymmetric floor washer.

VAREE is pre-wired with underwater cable and is fitted with anti condensation device. To avoid over-heating, VAREE is equipped with a thermal cut-off device thus the luminaire has to be submerged at all time. The marine grade 316 stainless steel material and advance polymer guarantees corrosion free appearance through out the life time. We highly recommend that the luminaire lay out should be considered during specifying and planning processes. Installation work must be carried out under national safety regulations.


Specification

- Designed, Manufactured and Tested according to IEC 60598.
- Marine grade 316 stainless steel / GFR polymer body.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- Precise beam control.
- Remote driver constant voltage (available separately).
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.
- To avoid over-heating, this luminaire must be used underwater only.


VAREE
Wall Recess

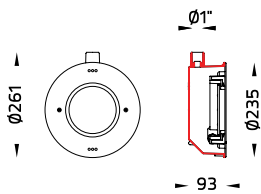

VAREE
Surface Mount



VAREE
Spotlight



VAREE

UNDERWATER SPOTLIGHT

VAREE Wall Recess / 7413
VAREE Surface Mount / 7414
VAREE Spotlight / 7415

Luminaire Performance

1150 - 2180 lm
18 - 25 W
52 - 90 lm/W

Beam Options




Color Temperature

2700K/ 3000K/ 4000K/ RGBW

Controller

N/A

Accessories

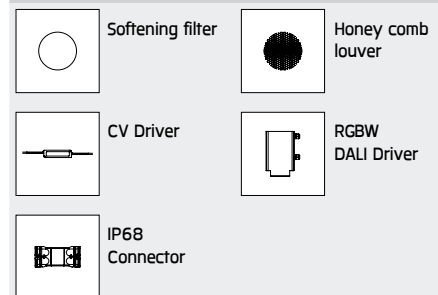




SIRIUS a brand new linear light family features various mounting application types including in-ground walk over, wall mounted, ceiling mounted, suspension and even permanently submersion stage. SIRIUS utilized the latest LED technology from world renowned manufactures with the choices of multiple light distributions. It offered narrow beam, medium beam, wide beam, asymmetric wall washer, wash glazing, bi-symmetric and much more. Thanks to a screw-less, clear and clean-cut design SIRIUS can be installed in most application where a decent architectural expression is required. Diversity types of connecting accessory is available for this linear light family.

Specification

- Designed, Manufactured and Tested according to IEC 60598.
- Pure aluminium and extruded aluminium housing. Marine grade stainless steel and clear PC tube.
- Stainless steel screws.
- Nano Ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- High performance PC lens.
- Post-cured silicone gasket.
- High quality LED module.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.


SIRIUS 300
Underwater



SIRIUS 600
Underwater



SIRIUS 1200
Underwater



SIRIUS – Underwater

UNDERWATER SPOTLIGHT

SIRIUS 300 – Underwater / 7422

SIRIUS 600 – Underwater / 7420

SIRIUS 1200 – Underwater / 7421

Luminaire Performance

760 – 2670 lm

7.1 – 29 W

83 – 125 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

N/A









Accessories










CV Driver




IP68
Connector

Product Code	Product Name	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Controller
OD-5980 	ATOM - CC Spotlight	3.9 W	19°	2700 K 3000 K 4000 K	160 lm 180 lm 180 lm	N/A
		3.9 W	30°	2700 K 3000 K 4000 K	160 lm 180 lm 180 lm	N/A
		3.9 W	42°	2700 K 3000 K 4000 K	160 lm 180 lm 180 lm	N/A
		3.9 W	Elliptical H	2700 K 3000 K 4000 K	140 lm 160 lm 160 lm	N/A
OD-5980 	ATOM - CC Spotlight	3.9 W	Frosted	2700 K 3000 K 4000 K	55 lm 55 lm 55 lm	N/A
		3.3 W	Frosted	Red	8 lm	N/A
		3.3 W		Green	23 lm	
3.9 W		Blue	8 lm			
OD-5981 	ATOM - CV Spotlight	3.9 W	19°	2700 K 3000 K 4000 K	160 lm 180 lm 180 lm	N/A
		3.9 W	30°	2700 K 3000 K 4000 K	160 lm 180 lm 180 lm	N/A
		3.9 W	42°	2700 K 3000 K 4000 K	160 lm 180 lm 180 lm	N/A
		3.9 W	Elliptical H	2700 K 3000 K 4000 K	140 lm 160 lm 160 lm	N/A
OD-5981 	ATOM - CV Spotlight	3.9 W	Frosted	2700 K 3000 K 4000 K	55 lm 55 lm 55 lm	N/A
OD-7480 	ATOM - CV Wall Recess Underwater	5.6 W	19°	2700 K 3000 K 4000 K	270 lm 270 lm 270 lm	N/A
		5.6 W	30°	2700 K 3000 K 4000 K	270 lm 270 lm 270 lm	N/A
		5.6 W	42°	2700 K 3000 K 4000 K	270 lm 270 lm 270 lm	N/A
		5.6 W	Elliptical H	2700 K 3000 K 4000 K	230 lm 230 lm 230 lm	N/A
OD-7480 	ATOM - CV Wall Recess Underwater	5.6 W	Frosted	2700 K 3000 K 4000 K	90 lm 90 lm 90 lm	N/A
OD-7481 	ATOM - CC Wall Recess Underwater	3.9 W	19°	2700 K 3000 K 4000 K	160 lm 180 lm 180 lm	N/A
		3.9 W	30°	2700 K 3000 K 4000 K	160 lm 180 lm 180 lm	N/A
		3.9 W	42°	2700 K 3000 K 4000 K	160 lm 180 lm 180 lm	N/A
		3.9 W	Elliptical H	2700 K 3000 K 4000 K	140 lm 160 lm 160 lm	N/A
OD-7481 	ATOM - CC Wall Recess Underwater	3.9 W	Frosted	2700 K 3000 K 4000 K	55 lm 55 lm 55 lm	N/A
		3.3 W	Frosted	Red	8 lm	N/A
		3.3 W		Green	23 lm	
3.9 W		Blue	8 lm			

Product Code	Product Name	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Controller
OD-7430 	VOLGA/1 – CV Ground Mount	3 W	5°	3000 K	70 lm	N/A
		5 W	10°	2700 K	280 lm	N/A
				3000 K	280 lm	
		5 W	30°	4000 K	290 lm	N/A
				2700 K	270 lm	
		5 W	43°	3000 K	270 lm	N/A
				4000 K	280 lm	
		5 W	Elliptical H	2700 K	290 lm	N/A
				3000 K	270 lm	
		5 W	Elliptical V	4000 K	280 lm	N/A
				2700 K	270 lm	
		8 W	18°	3000 K	360 lm	N/A
4000 K	390 lm					
8 W	43°	2700 K	420 lm	N/A		
		3000 K	370 lm			
8 W	Elliptical H	4000 K	400 lm	N/A		
		2700 K	430 lm			
8 W	Elliptical V	3000 K	330 lm	N/A		
		4000 K	360 lm			
OD-7430 	VOLGA/1 – CV Ground Mount	5 W	Frosted	2700 K	35 lm	N/A
				3000 K	35 lm	
8 W	Frosted	4000 K	40 lm	N/A		
		2700 K	40 lm			
8 W	Frosted	3000 K	50 lm	N/A		
		4000 K	50 lm			
OD-7431 	VOLGA/1 – CC Ground Mount	3 W	5°	3000 K	70 lm	N/A
		6 W	10°	2700 K	310 lm	N/A
				3000 K	310 lm	
		6 W	30°	4000 K	330 lm	N/A
				2700 K	300 lm	
		6 W	43°	3000 K	300 lm	N/A
				4000 K	320 lm	
		6 W	Elliptical H	2700 K	320 lm	N/A
				3000 K	320 lm	
		6 W	Elliptical V	4000 K	340 lm	N/A
				2700 K	300 lm	
		6 W	Elliptical H	3000 K	300 lm	N/A
4000 K	320 lm					
6 W	Elliptical V	2700 K	300 lm	N/A		
		3000 K	300 lm			
8 W	18°	4000 K	320 lm	N/A		
		2700 K	360 lm			
8 W	43°	3000 K	390 lm	N/A		
		4000 K	420 lm			
8 W	Elliptical H	2700 K	370 lm	N/A		
		3000 K	370 lm			
8 W	Elliptical V	4000 K	400 lm	N/A		
		2700 K	430 lm			
8 W	Elliptical H	3000 K	330 lm	N/A		
		4000 K	360 lm			
8 W	Elliptical V	2700 K	390 lm	N/A		
		3000 K	330 lm			
8 W	Frosted	4000 K	360 lm	N/A		
		2700 K	360 lm			
OD-7431 	VOLGA/1 – CC Ground Mount	6 W	Frosted	2700 K	40 lm	N/A
				3000 K	40 lm	
8 W	Frosted	4000 K	45 lm	N/A		
		2700 K	40 lm			
8 W	Frosted	3000 K	50 lm	N/A		
		4000 K	50 lm			



Product Code	Product Name	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Controller
OD-7418 	VOLGA/1 - CV Wall Recess Underwater	3 W	5°	3000 K	70 lm	N/A
		5 W	10°	2700 K	280 lm	N/A
				3000 K	280 lm	
		5 W	30°	4000 K	290 lm	N/A
				2700 K	270 lm	
		5 W	43°	3000 K	270 lm	N/A
				4000 K	280 lm	
		5 W	Elliptical H	2700 K	290 lm	N/A
				3000 K	290 lm	
		5 W	Asymmetric	4000 K	300 lm	N/A
				2700 K	270 lm	
8 W	18°	3000 K	270 lm	N/A		
		4000 K	280 lm			
8 W	43°	2700 K	150 lm	N/A		
		3000 K	150 lm			
8 W	Elliptical H	4000 K	160 lm	N/A		
		2700 K	360 lm			
8 W	Asymmetric	3000 K	390 lm	N/A		
		4000 K	420 lm			
8 W	43°	2700 K	370 lm	N/A		
		3000 K	400 lm			
8 W	Elliptical H	4000 K	430 lm	N/A		
		2700 K	330 lm			
8 W	Asymmetric	3000 K	360 lm	N/A		
		4000 K	390 lm			
8 W	Asymmetric	2700 K	190 lm	N/A		
		3000 K	210 lm			
8 W	Asymmetric	4000 K	220 lm	N/A		
		2700 K	35 lm			
OD-7418 	VOLGA/1 - CV Wall Recess Underwater	5 W	Frosted	3000 K	35 lm	N/A
				4000 K	40 lm	
8 W	Frosted	2700 K	40 lm	N/A		
		3000 K	50 lm			
8 W	Frosted	4000 K	50 lm	N/A		
		2700 K	70 lm			
6 W	10°	3000 K	310 lm	N/A		
		4000 K	330 lm			
6 W	30°	2700 K	300 lm	N/A		
		3000 K	300 lm			
6 W	43°	4000 K	320 lm	N/A		
		2700 K	320 lm			
6 W	Elliptical H	3000 K	320 lm	N/A		
		4000 K	340 lm			
6 W	Asymmetric	2700 K	300 lm	N/A		
		3000 K	300 lm			
6 W	Asymmetric	4000 K	320 lm	N/A		
		2700 K	170 lm			
8 W	18°	3000 K	170 lm	N/A		
		4000 K	180 lm			
8 W	43°	2700 K	360 lm	N/A		
		3000 K	390 lm			
8 W	Elliptical H	4000 K	420 lm	N/A		
		2700 K	370 lm			
8 W	Asymmetric	3000 K	370 lm	N/A		
		4000 K	400 lm			
8 W	Asymmetric	2700 K	430 lm	N/A		
		3000 K	400 lm			
8 W	Asymmetric	4000 K	430 lm	N/A		
		2700 K	330 lm			
8 W	Asymmetric	3000 K	360 lm	N/A		
		4000 K	390 lm			
8 W	Asymmetric	2700 K	190 lm	N/A		
		3000 K	210 lm			
8 W	Asymmetric	4000 K	220 lm	N/A		
		2700 K	40 lm			
OD-7419 	VOLGA/1 - CC Wall Recess Underwater	6 W	Frosted	3000 K	40 lm	N/A
				4000 K	45 lm	
8 W	Frosted	2700 K	40 lm	N/A		
		3000 K	50 lm			
8 W	Frosted	4000 K	50 lm	N/A		
		2700 K	40 lm			
8 W	Frosted	3000 K	50 lm	N/A		
		4000 K	50 lm			

ACQUA



Product Code	Product Name	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Controller
OD-7416 	ACQUA/1 – Wall Recess CV	15 W	10°	2700 K	1140 lm	N/A
				3000 K	1140 lm	
				4000 K	1220 lm	
		15 W	29°	2700 K	920 lm	N/A
3000 K	920 lm					
15 W	42°	2700 K	900 lm	N/A		
		3000 K	900 lm			
15 W	Elliptical H	2700 K	850 lm	N/A		
		3000 K	850 lm			
15 W	Asymmetric	2700 K	760 lm	N/A		
		3000 K	760 lm			
15 W	Asymmetric	4000 K	810 lm	N/A		
		4000 K	810 lm			

OD-7417 	ACQUA/1 – Ground Mount CV	15 W	10°	2700 K	1140 lm	N/A
				3000 K	1140 lm	
				4000 K	1220 lm	
		15 W	29°	2700 K	920 lm	N/A
3000 K	920 lm					
15 W	42°	2700 K	900 lm	N/A		
		3000 K	900 lm			
15 W	Elliptical H	2700 K	850 lm	N/A		
		3000 K	850 lm			
15 W	Asymmetric	2700 K	760 lm	N/A		
		3000 K	760 lm			
15 W	Asymmetric	4000 K	810 lm	N/A		
		4000 K	810 lm			

VAREE

OD-7413 	VAREE Wall Recess	21 W	12°	2700 K	1530 lm	N/A
				3000 K	1530 lm	
				4000 K	1630 lm	
		21 W	25°	2700 K	1260 lm	N/A
				3000 K	1260 lm	
				4000 K	1350 lm	
		21 W	46°	2700 K	1150 lm	N/A
				3000 K	1150 lm	
				4000 K	1230 lm	
		21 W	Elliptical H	2700 K	1250 lm	N/A
				3000 K	1250 lm	
				4000 K	1330 lm	
21 W	Asymmetric	2700 K	1220 lm	N/A		
		3000 K	1220 lm			
		4000 K	1300 lm			
29 W	12°	2700 K	2040 lm	N/A		
		3000 K	2040 lm			
		4000 K	2180 lm			
29 W	25°	2700 K	1690 lm	N/A		
		3000 K	1690 lm			
		4000 K	1810 lm			
29 W	46°	2700 K	1540 lm	N/A		
		3000 K	1540 lm			
		4000 K	1650 lm			
29 W	Elliptical H	2700 K	1660 lm	N/A		
		3000 K	1660 lm			
		4000 K	1780 lm			
29 W	Asymmetric	2700 K	1630 lm	N/A		
		3000 K	1630 lm			
		4000 K	1740 lm			
OD-7413 	VAREE Wall Recess	32 W	25° 46° Elliptical H Asymmetric	RGBW	1360 lm	N/A
				RGBW	1250 lm	
				RGBW	1560 lm	
				RGBW	1330 lm	

Product Code	Product Name	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Controller
OD-7414 	VAREE Surface Mount	21 W	12°	2700 K	1530 lm	N/A
				3000 K	1530 lm	
				4000 K	1630 lm	
		21 W	25°	2700 K	1260 lm	N/A
				3000 K	1260 lm	
				4000 K	1350 lm	
		21 W	46°	2700 K	1150 lm	N/A
				3000 K	1150 lm	
				4000 K	1230 lm	
		21 W	Elliptical H	2700 K	1250 lm	N/A
3000 K	1250 lm					
4000 K	1330 lm					
21 W	Asymmetric	2700 K	1220 lm	N/A		
		3000 K	1220 lm			
		4000 K	1300 lm			
29 W	12°	2700 K	2040 lm	N/A		
		3000 K	2040 lm			
		4000 K	2180 lm			
29 W	25°	2700 K	1690 lm	N/A		
		3000 K	1690 lm			
		4000 K	1810 lm			
29 W	46°	2700 K	1540 lm	N/A		
		3000 K	1540 lm			
		4000 K	1650 lm			
29 W	Elliptical H	2700 K	1660 lm	N/A		
		3000 K	1660 lm			
		4000 K	1780 lm			
29 W	Asymmetric	2700 K	1630 lm	N/A		
		3000 K	1630 lm			
		4000 K	1740 lm			
OD-7414 	VAREE Surface Mount	32 W	25°	RGBW	1360 lm	N/A
	46°		RGBW	1250 lm		
	Elliptical H		RGBW	1560 lm		
	Asymmetric		RGBW	1330 lm		
OD-7415 	VAREE Spotlight	21 W	12°	2700 K	1530 lm	N/A
				3000 K	1530 lm	
				4000 K	1630 lm	
		21 W	25°	2700 K	1260 lm	N/A
				3000 K	1260 lm	
				4000 K	1350 lm	
		21 W	46°	2700 K	1150 lm	N/A
				3000 K	1150 lm	
				4000 K	1230 lm	
		21 W	Elliptical H	2700 K	1220 lm	N/A
3000 K	1220 lm					
4000 K	1300 lm					
21 W	Asymmetric	2700 K	1250 lm	N/A		
		3000 K	1250 lm			
		4000 K	1330 lm			
29 W	12°	2700 K	2040 lm	N/A		
		3000 K	2040 lm			
		4000 K	2180 lm			
29 W	25°	2700 K	1690 lm	N/A		
		3000 K	1690 lm			
		4000 K	1810 lm			
29 W	46°	2700 K	1540 lm	N/A		
		3000 K	1540 lm			
		4000 K	1650 lm			
29 W	Elliptical H	2700 K	1630 lm	N/A		
		3000 K	1630 lm			
		4000 K	1740 lm			
29 W	Asymmetric	2700 K	1660 lm	N/A		
		3000 K	1660 lm			
		4000 K	1780 lm			
OD-7415 	VAREE Spotlight	32 W	25°	RGBW	1360 lm	N/A
	46°		RGBW	1250 lm		
	Elliptical H		RGBW	1330 lm		

Product Code	Product Name	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Controller
OD-7422 	SIRIUS 300 – Underwater	9 W	12°	2700 K	840 lm	N/A
				3000 K	840 lm	
				4000 K	890 lm	
		9 W	25°	2700 K	800 lm	N/A
3000 K	800 lm					
4000 K	850 lm					
9 W	46°	2700 K	760 lm	N/A		
		3000 K	760 lm			
9 W	Elliptical H	4000 K	810 lm	N/A		
		2700 K	780 lm			
9 W	Elliptical H	3000 K	780 lm	N/A		
		4000 K	830 lm			
OD-7420 	SIRIUS 600 – Underwater	13 W	12°	2700 K	960 lm	N/A
				3000 K	960 lm	
				4000 K	1010 lm	
		13 W	25°	2700 K	950 lm	N/A
				3000 K	950 lm	
				4000 K	1000 lm	
		13 W	46°	2700 K	940 lm	N/A
				3000 K	940 lm	
4000 K	990 lm					
13 W	Elliptical H	2700 K	970 lm	N/A		
		3000 K	970 lm			
13 W	Elliptical H	4000 K	1020 lm	N/A		
		2700 K	1300 lm			
18 W	12°	3000 K	1300 lm	N/A		
		4000 K	1390 lm			
18 W	25°	2700 K	1290 lm	N/A		
		3000 K	1290 lm			
18 W	25°	4000 K	1380 lm	N/A		
		2700 K	1280 lm			
18 W	46°	3000 K	1280 lm	N/A		
		4000 K	1360 lm			
18 W	Elliptical H	2700 K	1320 lm	N/A		
		3000 K	1320 lm			
18 W	Elliptical H	4000 K	1410 lm	N/A		
		2700 K	1820 lm		N/A	
23 W	12°	3000 K	1820 lm			
		4000 K	1910 lm			
		2700 K	1800 lm	N/A		
23 W	25°	3000 K	1800 lm			
		4000 K	1900 lm			
		2700 K	1780 lm	N/A		
23 W	46°	3000 K	1780 lm			
		4000 K	1880 lm			
		2700 K	1840 lm	N/A		
23 W	Elliptical H	3000 K	1840 lm			
		4000 K	1930 lm			
		2700 K	2470 lm	N/A		
33 W	12°	3000 K	2470 lm			
		4000 K	2640 lm			
		2700 K	2450 lm	N/A		
33 W	25°	3000 K	2450 lm			
		4000 K	2620 lm			
		2700 K	2430 lm	N/A		
33 W	46°	3000 K	2430 lm			
		4000 K	2580 lm			
		2700 K	2500 lm	N/A		
33 W	Elliptical H	3000 K	2500 lm			
		4000 K	2670 lm			

Application Reference





CONTACT US

Unilamp Co.,Ltd.

unilamp@unilamp.co.th
www.unilamp.co.th

THAILAND

Sale office and showroom:

461 Ramintra Road, Kannayao,
Bangkok 10230 Thailand
Tel: +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax: +66(0)2 943 2419

Purchasing office and warehouse:

2519 Ladprao 79, Ladprao Road,
Wangthonglang, Bangkok 10310 Thailand
Tel: +66(0)2 539 8588, +66(0)81 935 4726

Engineering office:

2519 Ladprao 79, Ladprao Road,
Wangthonglang, Bangkok 10310 Thailand
Tel: +66(0)84 427 7235

Machining and coating factory:

25 Moo 11 Tambol Bansang,
Amper Bansang, Prachinburi 25150 Thailand
Tel: +66(0)85 133 5904

Assembly factory:

29 Moo 3 Tambol Bansang,
Amper Bansang, Prachinburi 25150 Thailand
Tel: +66(0)89 900 5904

MIDDLE EAST

Sale support office:

Sharjah Airport International Freezone,
Sharjah, United Arab Emirates
Contact Person: Mr. Shakhir Azam
Tel: +971 50 7654183
E-mail : shakhir@unilamp.co.th

INDIA, SRI LANKA, BANGLADESH, PAKISTAN, MALDIVES, NEPAL, BHUTAN

Sale support office:

A-31/S-1 [Block A],
Dilshard Garden, Delhi 110095
Contact Person: Mr. Deepanshu Biswas
Tel: +91 9871135550
E-mail : deepanshu_b@unilamp.co.th

NORWAY

Associate Company:

UNILAMP NORDEN AS
INDUSTRIVEIEN 11 1481 HAGAN, NORWAY
Tel: +47 67 49 47 70
Tel: +47 22 32 50 22
Website : <https://www.unilamp.no>

INDONESIA

Sale support office:

Grand Slipi Tower Lt. 9, Unit G, Jl. Letjen,
S.Parmar Kav. 22-24, Palmerah, Jakarta Barat,
Indonesia 11480
Contact Person: Mr. Doddy Prijambodov
Tel: +62 818 931 496
E-mail : doddy_p@unilamp.co.th

PHILIPPINES

Sale support office:

353 M.L. Quezon St. Lower Bicutan Taguig City, Philippines
Contact Person: Ms. Sherwin Sajul
Tel: +63 916 445 7515
E-mail : sherwin@unilamp.co.th




www.unilamp.co.th




[@Unilamp](https://line.me/tv/@Unilamp)




[UnilampThailand](https://www.facebook.com/UnilampThailand)




[unilamp.thailand](https://www.instagram.com/unilamp.thailand)




[unilamp](https://www.linkedin.com/company/unilamp)




[Unilamp Thailand](https://www.youtube.com/UnilampThailand)




[UnilampLighting](https://twitter.com/UnilampLighting)

DUE TO THE CONSTANCY OF PRODUCT DEVELOPMENT,
WE RESERVE THE RIGHT TO ALTER ALL SPECIFICATION
WITHOUT PRIOR NOTICE.

PLEASE CHECK PRODUCT AVAILABILITY AND UPDATES
ON OUR WEBSITE OR SALES REPRESENTATIVE.

Last update on 07/04/2023