


# PROFESSIONAL



An extremely durable waterproof professional luminaire, according to leading international standards and requirements. PROFESSIONAL's white base and a wide structure contribute to its reduced glare. The fixture's has high ingress protection (IP65) and high impact protection (IK10). It utilizes a Vossloh-Schwabe Ripple<3% and THD>5% LED driver, and is available in several sizes and power supply options.

For lighting underground parking lots, sheds, warehouses, production halls, garages, shops and mor.

## Technical specifications:

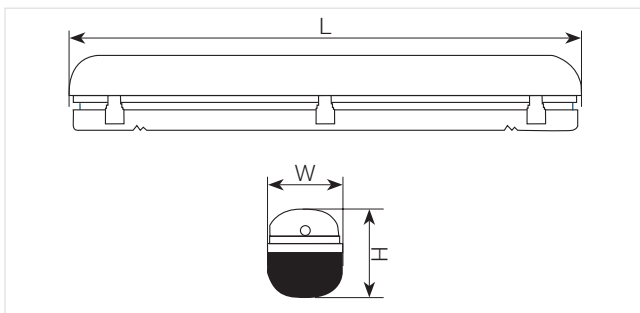

**Material:** White Injection Moulded PC Base.

Stainless Steel Clips.

**Diffuser:** PC

**Body Color:** ○

**Power:** 20W / 36W / 60W

**Ingress Protection Rating:** IP65

**Impact Protection Rating:** IK08

**CCT:** 4000K


**Mounting Type:** Surface Mounted

Dimming available by special order.

Power (W)	CCT	Length×Height×Width (mm)	Luminaire's Lumen Output (lm)
20	4000K	675×88×132	2,100
36	4000K	1278×88×132	4,500
60	4000K	1565×88×132	8,400

\* Data shown is for a few of the available models. The luminaires are available in different colour temperatures, optics, lumen outputs and power. \*\* Tolerance: +-10%.

## Photometric Curves:



220-240V  
50-60 Hz

PF>95%

ta=  
-20-40°C

IK08

IP65

FLICKER  
FREE

THD<8%

CRI>85

LM80

L80≥  
60,000  
Hours

CB

