


designed for warehouses, factories and large industrial spaces. PROLINE has high durability and a long life, and it allows the quick connection of up to 90 lighting fixtures, with a cable passing through them, in one feed, which significantly facilitates the installation and maintenance of the lighting in the space. Connecting the bodies is clickable, with quick connectors.

The color temperature of Vs Proline is extremely accurate (CRI 90), and its energy efficiency is high and enables energy savings (100lm/W).

Technical specifications:

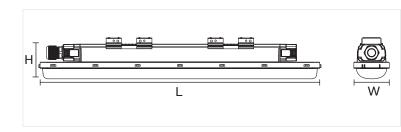


Material: White injection mould PC base Diffuser: PC Body Color: () Optic: 90° Power: 18W /36W / 50W CCT: 4000K Mounting Type: Ceiling Surface Ingress Protection Rating: IP65 Impact Protection Rating: IK10

Power (W)	CCT	Length×Width×Height (mm)	Luminaire's Lumen Output (lm)
18	4000K	555×70×68	1980lm
36	4000K	1165×70×68	3960lm
50	4000K	1455×70×68	5500lm

* Data shown is for a few of the available models. The luminaires are available in different colour temperatures, optics, lumen outputs and power. ** Tolerance: -+10%.

Photometric Curves:



DF>92%

Accesories:



0-240 0-60 H