


# FUJI

## ■ BOLLARD

**FUJI** is a family of shielded bollard with symmetrical light distribution. **FUJI** is fitted with the latest generation of COB LED with exceptional color consistency. It is generally installed in walkways, parks, commercial areas and open spaces. It provides general lighting for the residential areas where light pollution has to be controlled. The bollard height can be customized according to specific requirement. An anchorage unit is available as an accessory.




[www.unilamp.co.th/en/p/fuji](http://www.unilamp.co.th/en/p/fuji)


Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Polycarbonate protective cover.
- Anodized aluminum reflector.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.


Available Color



**\*\*Custom colors are available on request.**

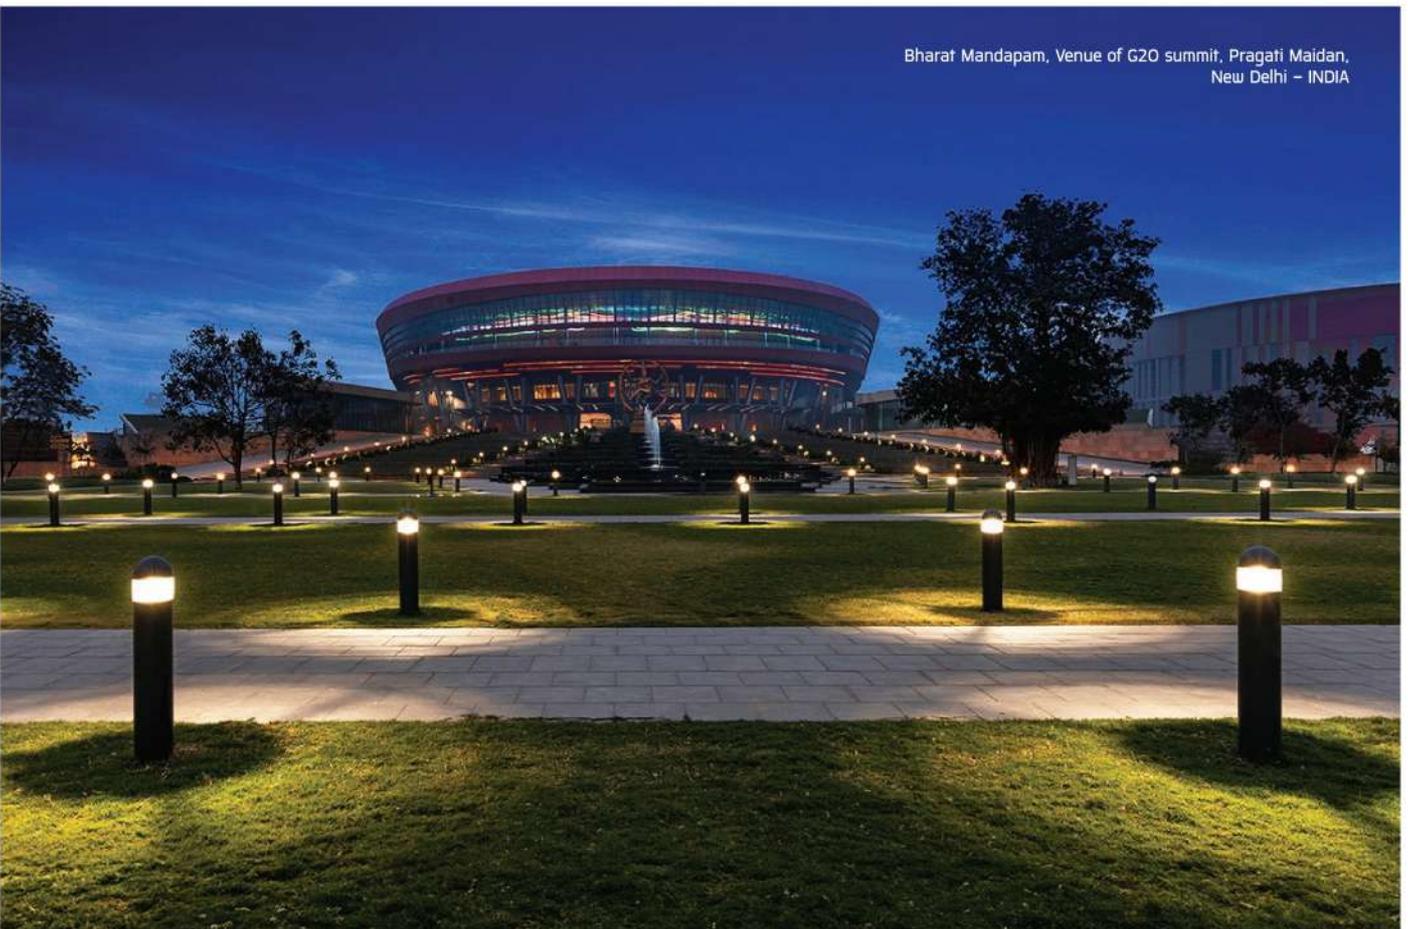

Bharat Mandapam, Venue of G20 summit, Pragati Maidan, New Delhi – INDIA

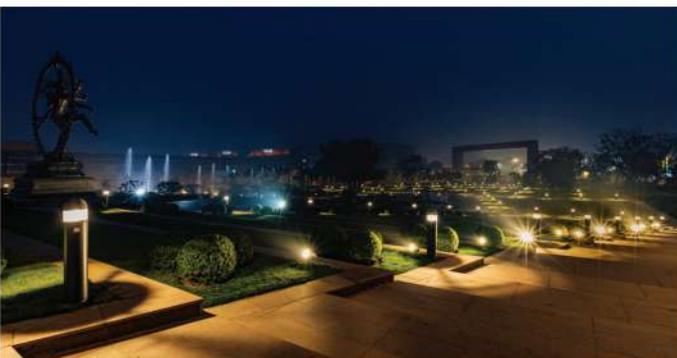

# FUJI




FUJI Round

FUJI Flat

Double FUJI Flat

Double FUJI Round

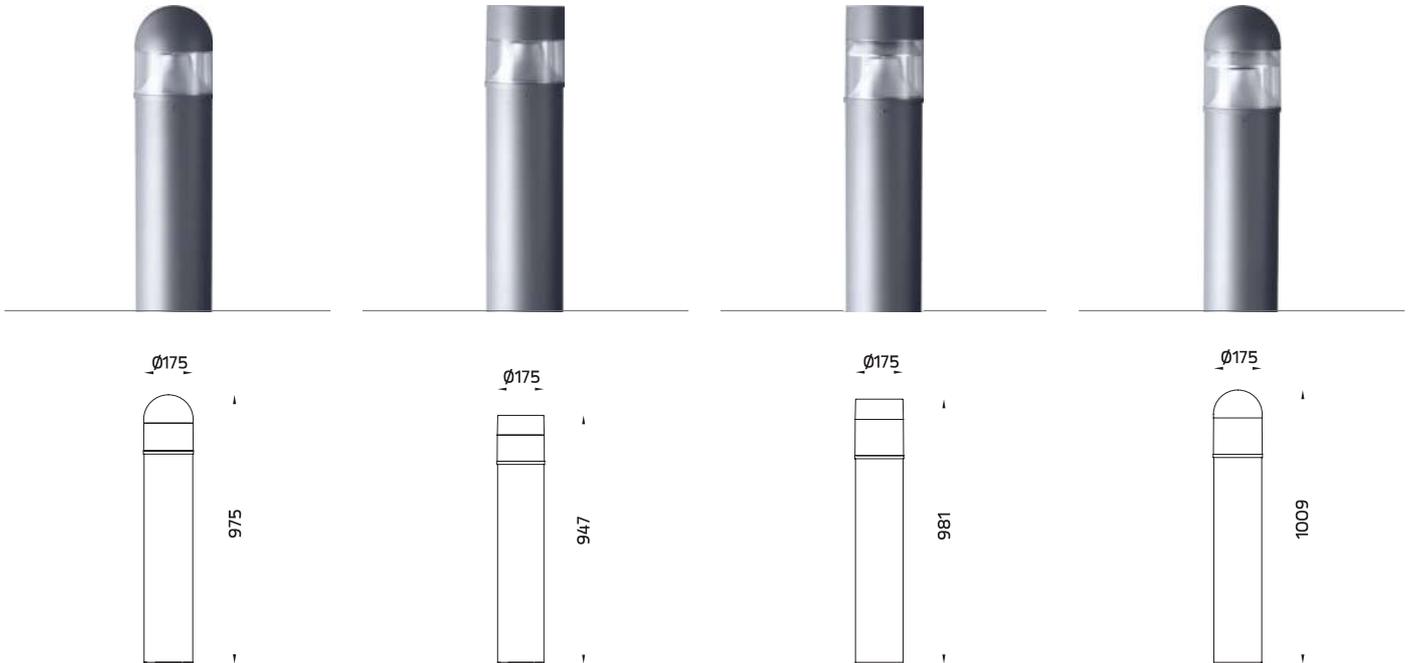

## FUJI

Application Type : Bollard  
Subgroup : Shielded bollard

FUJI Round / 7111  
FUJI Flat / 7112  
Double FUJI Flat / 7119  
Double FUJI Round / 7120

### Luminaire Performance

1810 – 2950 lm  
27 – 39 W  
64 – 75 lm/W

### Beam Options



### Color Temperature

2700K/ 3000K/ 4000K

### Controller

On-Off/ 1-10V/ DALI

### Input Options

220-240Vac 50/60Hz

### Accessories




Anchor bolt



IP68 Connector

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
										
<b>FUJI</b> Round	<b>OD-7111</b> 	27 W	N/A	3000 K 3000 K	1810 lm 1810 lm	67 lm/W 67 lm/W	•		•	7111-0-3-887-XX 7111-0-5-887-XX
		39 W	N/A	3000 K 2700 K	2620 lm 2510 lm	67 lm/W 64 lm/W	•			7111-0-3-902-XX 7111-0-3-505-XX
<b>FUJI</b> Flat	<b>OD-7112</b> 	27 W	N/A	3000 K 4000 K	1810 lm 1850 lm	67 lm/W 68 lm/W	•			7112-0-3-887-XX 7112-0-3-891-XX
		39 W	N/A	3000 K 4000 K	2620 lm 2690 lm	67 lm/W 68 lm/W	•			7112-0-3-902-XX 7112-0-3-905-XX
<b>Double FUJI</b> Flat	<b>OD-7119</b> 	27 W	N/A	3000 K 4000 K 3000 K	1990 lm 2030 lm 1990 lm	73 lm/W 75 lm/W 73 lm/W	•	•	•	7119-0-3-887-XX 7119-0-4-891-XX 7119-0-5-887-XX
		39 W	N/A	3000 K 4000 K	2880 lm 2950 lm	73 lm/W 75 lm/W	•		•	7119-0-3-902-XX 7119-0-3-905-XX
<b>Double FUJI</b> Round	<b>OD-7120</b> 	27 W	N/A	3000 K 4000 K	1990 lm 2030 lm	73 lm/W 75 lm/W	•			7120-0-3-887-XX 7120-0-3-891-XX
		39 W	N/A	4000 K	2950 lm	75 lm/W	•			7120-0-3-905-XX

\*Please contact sales team for special request.

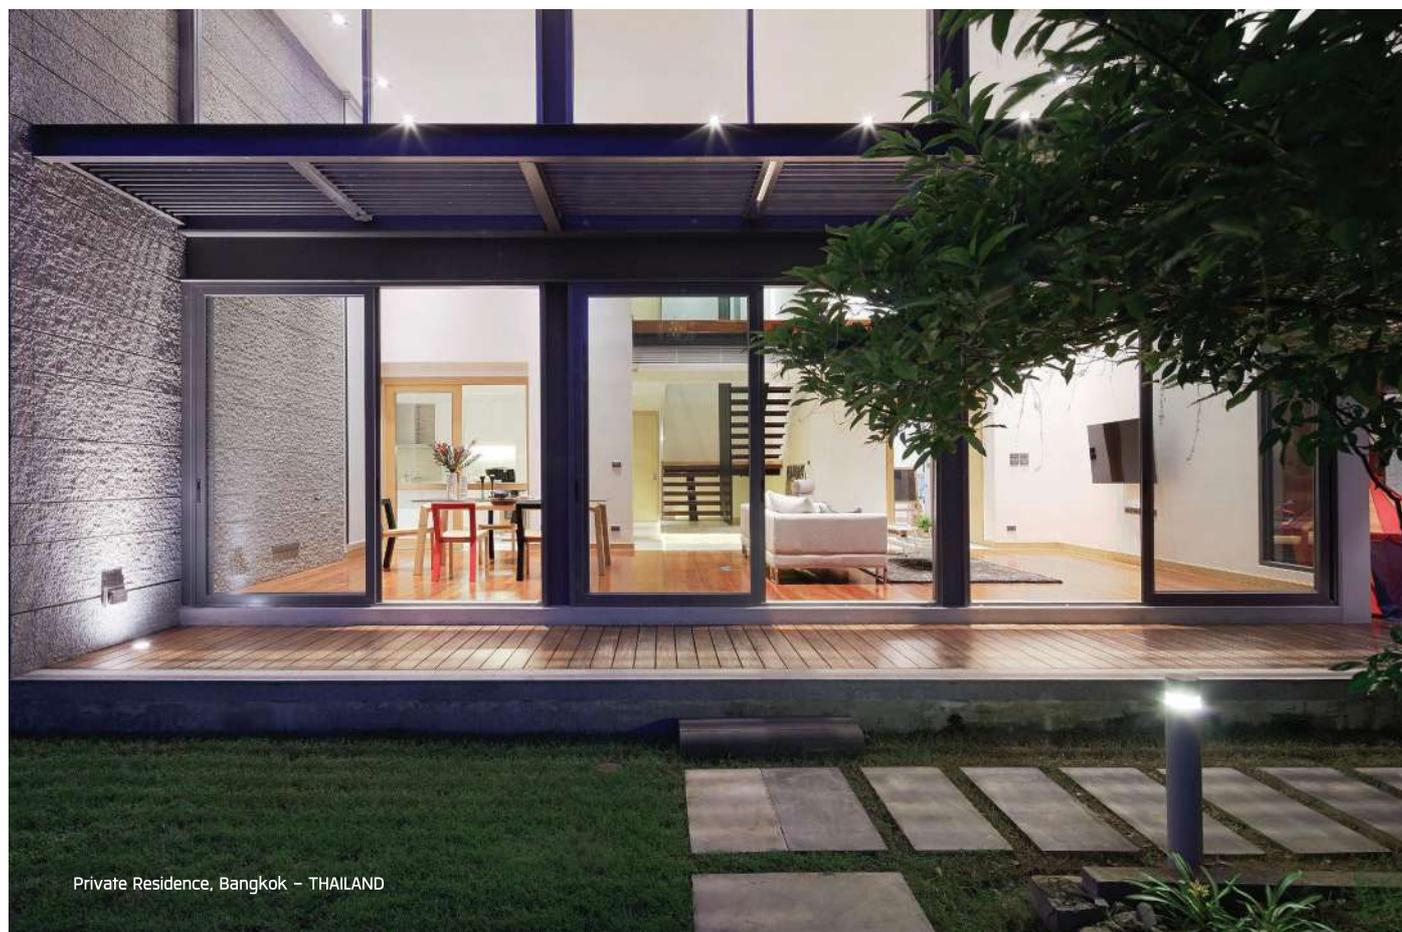

Private Residence, Bangkok – THAILAND