

# SIRIUS

- WALL SURFACE MOUNT
- UNDERWATER
- INGROUND
- CEILING MOUNT



**SIRIUS** a brand new linear light family features various mounting application types including in-ground walk over, wall mounted, ceiling mounted and suspension light. **SIRIUS** utilized the latest LED technology from world renowned manufactures with the choices of multiple light distributions. It offered narrow beam, medium beam, wide beam, asymmetric wall washer, wash glazing, bi-symmetric and much more. Thanks to a screw-less, clear and clean-cut design SIRIUS can be installed in most application where a decent architectural expression is required. Diversity types of connecting accessory is available for this linear light family.



Content  
by Application



Content  
by Family



[www.unilamp.co.th/en/p/sirius](http://www.unilamp.co.th/en/p/sirius)

## Specification

- Designed, manufactured and tested according to IEC 60598.
- Pure aluminum and extruded aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- High performance PC lens.
- Post-cured silicone gasket.
- High quality LED module.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

## Available Color



\*\*Custom colors are available on request.


The Residency Tower Pondicherry – INDIA




# SIRIUS




SIRIUS 300/  
SIRIUS 300 – CV




SIRIUS 600




SIRIUS 1200/  
SIRIUS 1200 – CV



SIRIUS 600 – HI



SIRIUS 1200 – HI



## SIRIUS

Application Type : Linear lighting  
Subgroup : Ceiling mount

SIRIUS 300 / 4233  
SIRIUS 300 – CV / 4233  
SIRIUS 600 / 4231  
SIRIUS 600 – HI / 4231  
SIRIUS 1200 / 4232  
SIRIUS 1200 – CV / 4232  
SIRIUS 1200 – HI / 4232

### Luminaire Performance

620 – 4860 lm  
7.3 – 46 W  
61 – 111 lm/W

### Beam Options



### Color Temperature

3000K/ 4000K


### Controller

On-off/ 1-10/ DALI/ Remote

### Input Voltage


24VDC  
220-240Vac 50/60Hz

### Accessories

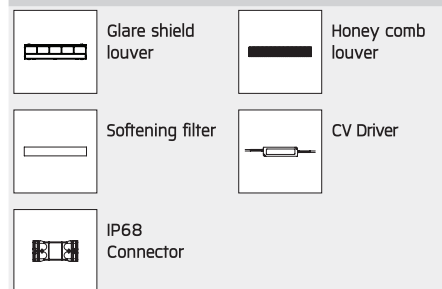




SIRIUS 300



SIRIUS 600



SIRIUS 1200



**SIRIUS**

Application Type : Linear lighting  
Subgroup : Underwater

SIRIUS 600 / 7420  
SIRIUS 1200 / 7421  
SIRIUS 300 / 7422

**Luminaire Performance**

820 - 2840 lm  
7.3 - 30 W  
85 - 128 lm/W

**Beam Options**



**Color Temperature**

2700K/ 3000K/ 4000K

**Controller**

Remote

**Input Voltage**

24VDC

**Accessories**



CV Driver




IP68 Connector


# SIRIUS




SIRIUS 300/  
SIRIUS 300 – CV




SIRIUS 600/  
SIRIUS 600 – CV




SIRIUS 1200/  
SIRIUS 1200 – CV



SIRIUS 600 – HI



SIRIUS 1200 – HI



## SIRIUS


Application Type : Linear lighting  
Subgroup : Wall surface mount

SIRIUS 300 / 8033  
SIRIUS 300 – CV / 8033  
SIRIUS 600 / 8031  
SIRIUS 600 – CV / 8031  
SIRIUS 600 – HI / 8031  
SIRIUS 1200 / 8032  
SIRIUS 1200 – CV / 8032  
SIRIUS 1200 – HI / 8032

### Luminaire Performance

370 – 4900 lm  
5 – 46 W  
60 – 111 lm/W

### Beam Options



### Color Temperature

2700K/ 3000K/ 4000K


### Controller

On-Off/ 1-10V/ DALI/ Remote

### Input Voltage

24VDC  
220-240Vac 50/60Hz

### Accessories

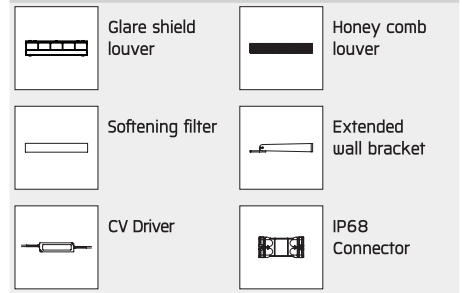





SIRIUS 300/  
SIRIUS 300 – CV



SIRIUS 600

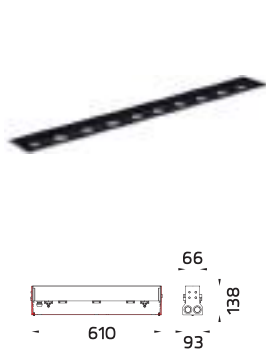

SIRIUS 1200

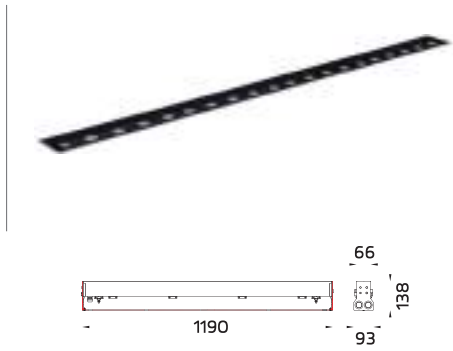

**SIRIUS**

Application Type : Linear lighting  
Subgroup : Inground

SIRIUS 300 / 9068  
SIRIUS 300 – CV / 9068  
SIRIUS 600 / 9066  
SIRIUS 1200 / 9067

**Luminaire Performance**

370 – 1650 lm  
5 – 17 W  
60 – 104 lm/W

**Beam Options**



**Color Temperature**

2700K/ 3000K/ 4000K


**Controller**

On–Off/ 1–10V/ DALI/ Remote

**Input Voltage**

24VDC  
220–240Vac 50/60Hz

**Accessories**

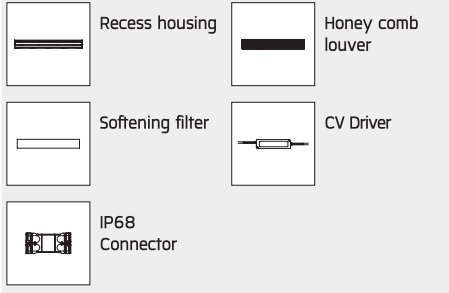











	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code	
										REMOTE		
SIRIUS 600	OD-4231 	13 W	46°/16°	3000 K	1040 lm	80 lm/W	•				4231-H-3-555-XX	
		17 W	30°	3000 K	1740 lm	102 lm/W	•				4231-C-3-542-XX	
				4000 K	1880 lm	110 lm/W	•				4231-C-3-543-XX	
		18 W	46°	3000 K	1370 lm	76 lm/W	•				4231-C-3-549-XX	
		25 W 	75°	3000 K	2380 lm	95 lm/W	•			•	4231-E-3-540-XX	
Asymmetric	4000 K		2480 lm	99 lm/W	•					4231-K-3-541-XX		
SIRIUS 1200	OD-4232 	23 W	25°	3000 K	1870 lm	81 lm/W	•				4232-B-3-555-XX	
			46°	3000 K	1890 lm	82 lm/W	•				4232-C-3-555-XX	
		30 W	46°	3000 K	2600 lm	86 lm/W				•	4232-C-2-552-XX	
			4000 K	2790 lm	93 lm/W				•	4232-C-2-553-XX		
			4000 K	3570 lm	111 lm/W					•	4232-C-4-543-XX	
		32 W 	75°	3000 K	3280 lm	102 lm/W	•		•		4232-E-3-542-XX	
	Asymmetric		3000 K	3280 lm	102 lm/W	•		•			4232-E-4-542-XX	
			4000 K	3420 lm	106 lm/W	•					4232-K-3-543-XX	
			12°	3000 K	2900 lm	87 lm/W	•				4232-A-3-549-XX	
		33 W	46°	3000 K	2600 lm	78 lm/W	•				4232-C-3-549-XX	
				4000 K	2790 lm	84 lm/W	•			•	4232-C-5-550-XX	
			Asymmetric	3000 K	2520 lm	76 lm/W	•			•	4232-K-5-549-XX	
		45 W	46°	3000 K	3560 lm	79 lm/W	•				4232-C-3-696-XX	
	46 W	75°	4000 K	4860 lm	105 lm/W	•				4232-E-3-541-XX		
			Asymmetric	3000 K	4370 lm	95 lm/W	•				4232-K-3-540-XX	
SIRIUS 300	OD-4233 	7.3 W	46°	3000 K	640 lm	87 lm/W				•	4233-C-2-552-XX	
			Asymmetric	3000 K	620 lm	84 lm/W				•	4233-K-2-552-XX	
		11 W	46°	3000 K	680 lm	61 lm/W	•					4233-C-3-549-XX
			46°/16°	3000 K	710 lm	64 lm/W	•					4233-H-3-549-XX
			13 W	46°	3000 K	930 lm	71 lm/W	•				4233-C-3-696-XX
	Asymmetric	3000 K		910 lm	70 lm/W	•				4233-K-3-696-XX		
		4000 K	960 lm	73 lm/W	•					4233-K-3-697-XX		
SIRIUS 600	OD-7420 	10 W	12°	3000 K	1000 lm	100 lm/W				•	7420-A-2-558-91	
				25°	3000 K	990 lm	99 lm/W				•	7420-B-2-558-91
				46°	3000 K	980 lm	98 lm/W				•	7420-C-2-558-91
				4000 K	1050 lm	105 lm/W				•	7420-C-2-559-91	
				46°/16°	3000 K	1010 lm	101 lm/W				•	7420-H-2-558-91
		15 W	12°	2700 K	1380 lm	92 lm/W				•	7420-A-2-551-91	
				25°	2700 K	1360 lm	90 lm/W				•	7420-B-2-551-91
	3000 K		1360 lm	90 lm/W				•	7420-B-2-552-91			
		46°/16°	3000 K	1390 lm	92 lm/W				•	7420-H-2-552-91		
SIRIUS 1200	OD-7421 	20 W	12°	3000 K	1900 lm	95 lm/W				•	7421-A-2-558-91	
				4000 K	2040 lm	102 lm/W				•	7421-A-2-559-91	
				25°	3000 K	1880 lm	94 lm/W				•	7421-B-2-558-91
				4000 K	1990 lm	99 lm/W				•	7421-C-2-559-91	
				3000 K	1920 lm	96 lm/W				•	7421-H-2-558-91	
				4000 K	2060 lm	103 lm/W				•	7421-H-2-559-91	
		30 W	12°	2700 K	2610 lm	87 lm/W				•	7421-A-2-551-91	
				3000 K	2560 lm	85 lm/W				•	7421-C-2-552-91	
	4000 K		2750 lm	91 lm/W				•	7421-C-2-553-91			
	46°/16°		4000 K	2840 lm	94 lm/W				•	7421-H-2-553-91		
SIRIUS 300	OD-7422 	7.3 W	12°	3000 K	880 lm	120 lm/W				•	7422-A-2-552-91	
				4000 K	940 lm	128 lm/W				•	7422-A-2-553-91	
				25°	2700 K	840 lm	115 lm/W				•	7422-B-2-551-91
				3000 K	840 lm	115 lm/W				•	7422-B-2-552-91	
		46°/16°	3000 K	820 lm	112 lm/W				•	7422-H-2-552-91		
SIRIUS 600	OD-8031 	10 W 	12°	2700 K	820 lm	82 lm/W	•				8031-A-3-474-XX	
					3000 K	820 lm	82 lm/W	•				8031-A-3-475-XX
					4000 K	870 lm	87 lm/W	•				8031-A-3-476-XX
			25°	2700 K	730 lm	73 lm/W	•					8031-B-3-474-XX
				3000 K	730 lm	73 lm/W	•					8031-B-3-475-XX
				4000 K	770 lm	77 lm/W	•					8031-B-3-476-XX
				2700 K	730 lm	73 lm/W	•					8031-C-3-474-XX
		46°	3000 K	730 lm	73 lm/W	•					8031-C-3-475-XX	
			4000 K	780 lm	78 lm/W	•					8031-C-3-476-XX	
			2700 K	710 lm	71 lm/W	•					8031-K-3-474-XX	
		Asymmetric	3000 K	710 lm	71 lm/W	•					8031-K-3-475-XX	
			4000 K	750 lm	75 lm/W	•					8031-K-3-476-XX	
			2700 K	770 lm	77 lm/W	•					8031-H-3-474-XX	
		46°/16°	3000 K	770 lm	77 lm/W	•					8031-H-3-475-XX	
			4000 K	810 lm	81 lm/W	•					8031-H-3-476-XX	
			3000 K	1110 lm	85 lm/W	•					8031-A-3-555-XX	
		13 W	25°	3000 K	980 lm	75 lm/W	•					8031-B-3-555-XX
	3000 K		1040 lm	80 lm/W	•					8031-H-3-555-XX		
12°	3000 K		1530 lm	102 lm/W				•	8031-A-2-552-XX			
15 W	25°	3000 K	1360 lm	90 lm/W				•	8031-B-2-552-XX			
		3000 K	1370 lm	91 lm/W				•	8031-C-2-552-XX			
	46°	3000 K	1370 lm	91 lm/W				•	8031-C-2-552-XX			
	Asymmetric	2700 K	1330 lm	88 lm/W				•	8031-K-2-551-XX			
		3000 K	1430 lm	95 lm/W				•	8031-H-2-552-XX			
		4000 K	1540 lm	102 lm/W				•	8031-H-2-553-XX			

\*Please contact sales team for special request.

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
									REMOTE	
<b>SIRIUS 600</b>  	17 W	30°	3000 K	1740 lm	102 lm/W	•				8031-C-3-542-XX
			4000 K	1880 lm	110 lm/W	•				8031-C-3-543-XX
		75°	3000 K	1730 lm	101 lm/W	•				8031-E-3-542-XX
			4000 K	1860 lm	109 lm/W	•				8031-E-3-543-XX
		Asymmetric	3000 K	1670 lm	98 lm/W	•				8031-K-3-542-XX
			4000 K	1800 lm	105 lm/W	•				8031-K-3-543-XX
	18 W	12°	3000 K	1530 lm	85 lm/W	•				8031-A-3-549-XX
			2700 K	1530 lm	85 lm/W	•		•		8031-A-5-548-XX
		25°	2700 K	1360 lm	75 lm/W	•				8031-B-3-548-XX
			3000 K	1360 lm	75 lm/W	•				8031-B-3-549-XX
		46°	4000 K	1460 lm	81 lm/W	•				8031-B-3-550-XX
			3000 K	1370 lm	76 lm/W	•				8031-C-3-549-XX
	Asymmetric	2700 K	1370 lm	76 lm/W	•		•		8031-C-4-548-XX	
		3000 K	1330 lm	73 lm/W	•				8031-K-3-549-XX	
	46°/16°	3000 K	1430 lm	79 lm/W	•				8031-H-3-549-XX	
		3000 K	1430 lm	79 lm/W	•				8031-H-3-549-XX	
24 W	12°	3000 K	2090 lm	87 lm/W	•				8031-A-3-696-XX	
		3000 K	1820 lm	75 lm/W	•				8031-K-3-696-XX	
25 W	30°	3000 K	2400 lm	96 lm/W	•				8031-C-3-540-XX	
		4000 K	2580 lm	103 lm/W	•				8031-C-3-541-XX	
	75°	3000 K	2380 lm	95 lm/W	•				8031-E-3-540-XX	
		3000 K	2300 lm	92 lm/W	•				8031-K-3-540-XX	
Asymmetric	3000 K	2300 lm	92 lm/W	•		•		8031-K-5-540-XX		
<b>SIRIUS 1200</b>  	17 W	12°	2700 K	1550 lm	91 lm/W	•				8032-A-3-474-XX
			3000 K	1550 lm	91 lm/W	•				8032-A-3-475-XX
			4000 K	1650 lm	97 lm/W	•				8032-A-3-476-XX
		25°	2700 K	1380 lm	81 lm/W	•				8032-B-3-474-XX
			3000 K	1380 lm	81 lm/W	•				8032-B-3-475-XX
			4000 K	1470 lm	86 lm/W	•				8032-B-3-476-XX
		46°	2700 K	1390 lm	81 lm/W	•				8032-C-3-474-XX
			3000 K	1390 lm	81 lm/W	•				8032-C-3-475-XX
			4000 K	1480 lm	87 lm/W	•				8032-C-3-476-XX
		Asymmetric	2700 K	1350 lm	79 lm/W	•				8032-K-3-474-XX
	3000 K		1350 lm	79 lm/W	•				8032-K-3-475-XX	
	4000 K		1430 lm	84 lm/W	•				8032-K-3-476-XX	
	2700 K		1460 lm	85 lm/W	•				8032-H-3-474-XX	
	46°/16°	3000 K	1460 lm	85 lm/W	•				8032-H-3-475-XX	
		4000 K	1540 lm	90 lm/W	•				8032-H-3-476-XX	
		3000 K	2100 lm	91 lm/W	•				8032-A-3-555-XX	
	23 W	12°	3000 K	2100 lm	91 lm/W	•				8032-A-3-555-XX
			3000 K	1870 lm	81 lm/W	•				8032-B-3-555-XX
		46°	2700 K	1890 lm	82 lm/W	•				8032-C-3-554-XX
	3000 K		1890 lm	82 lm/W	•				8032-C-3-555-XX	
	30 W	12°	2700 K	2900 lm	96 lm/W	•			•	8032-A-2-551-XX
			3000 K	2900 lm	96 lm/W	•			•	8032-A-2-552-XX
		25°	3000 K	2580 lm	86 lm/W	•			•	8032-B-2-552-XX
			3000 K	2600 lm	86 lm/W	•			•	8032-C-2-552-XX
		Asymmetric	3000 K	2520 lm	84 lm/W	•			•	8032-K-2-552-XX
	46°/16°	3000 K	2720 lm	90 lm/W	•			•	8032-H-2-552-XX	
		4000 K	2920 lm	97 lm/W	•			•	8032-H-2-553-XX	
	32 W	30°	3000 K	3300 lm	103 lm/W	•		•		8032-C-3-542-XX
			4000 K	3570 lm	111 lm/W	•				8032-C-4-543-XX
		75°	3000 K	3280 lm	102 lm/W	•				8032-E-3-542-XX
			3000 K	3280 lm	102 lm/W	•		•		8032-E-5-542-XX
	Asymmetric	3000 K	3170 lm	99 lm/W	•				8032-K-3-542-XX	
		3000 K	3170 lm	99 lm/W	•		•		8032-K-5-542-XX	
	33 W	12°	3000 K	2900 lm	87 lm/W	•				8032-A-3-549-XX
			4000 K	3110 lm	94 lm/W	•				8032-A-3-550-XX
			2700 K	2900 lm	87 lm/W	•		•		8032-A-4-548-XX
		25°	3000 K	2580 lm	78 lm/W	•				8032-B-3-549-XX
			2700 K	2580 lm	78 lm/W	•		•		8032-B-5-548-XX
		46°	2700 K	2600 lm	78 lm/W	•				8032-C-3-548-XX
			3000 K	2600 lm	78 lm/W	•				8032-C-3-549-XX
			4000 K	2790 lm	84 lm/W	•		•		8032-C-4-550-XX
			3000 K	2600 lm	78 lm/W	•		•		8032-C-5-549-XX
		Asymmetric	3000 K	2520 lm	76 lm/W	•				8032-K-3-549-XX
	3000 K		2520 lm	76 lm/W	•		•		8032-K-5-549-XX	
	4000 K		2700 lm	81 lm/W	•		•		8032-K-5-550-XX	
	46°/16°	2700 K	2720 lm	82 lm/W	•				8032-H-3-548-XX	
3000 K		2720 lm	82 lm/W	•		•		8032-H-4-549-XX		
45 W	12°	3000 K	3970 lm	88 lm/W	•				8032-A-3-696-XX	
		3000 K	3450 lm	76 lm/W	•				8032-K-3-696-XX	
	Asymmetric	3000 K	3450 lm	76 lm/W	•		•		8032-K-5-696-XX	
46°/16°	3000 K	3720 lm	82 lm/W	•				8032-H-3-696-XX		
	4000 K	4900 lm	106 lm/W	•				8032-C-3-541-XX		
46 W	30°	3000 K	4860 lm	105 lm/W	•				8032-E-3-540-XX	
		4000 K	4860 lm	105 lm/W	•				8032-E-3-541-XX	
	Asymmetric	3000 K	4370 lm	95 lm/W	•				8032-K-3-540-XX	
4000 K	4710 lm	102 lm/W	•					8032-K-3-541-XX		







Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
									REMOTE	
OD-8033 	5 W	12°	2700 K	430 lm	86 lm/W	•				8033-A-3-474-XX
			3000 K	430 lm	86 lm/W	•				8033-A-3-475-XX
			4000 K	450 lm	90 lm/W	•				8033-A-3-476-XX
		25°	2700 K	370 lm	74 lm/W	•				8033-B-3-474-XX
			3000 K	370 lm	74 lm/W	•				8033-B-3-475-XX
			4000 K	400 lm	80 lm/W	•				8033-B-3-476-XX
		46°	2700 K	380 lm	76 lm/W	•				8033-C-3-474-XX
			3000 K	380 lm	76 lm/W	•				8033-C-3-475-XX
			4000 K	400 lm	80 lm/W	•				8033-C-3-476-XX
		Asymmetric	2700 K	370 lm	74 lm/W	•				8033-K-3-474-XX
			3000 K	370 lm	74 lm/W	•				8033-K-3-475-XX
			4000 K	390 lm	78 lm/W	•				8033-K-3-476-XX
		46°/16°	2700 K	400 lm	80 lm/W	•				8033-H-3-474-XX
			3000 K	400 lm	80 lm/W	•				8033-H-3-475-XX
			4000 K	420 lm	84 lm/W	•				8033-H-3-476-XX
	7.3 W	12°	2700 K	700 lm	95 lm/W				•	8033-A-2-551-XX
			3000 K	700 lm	95 lm/W				•	8033-A-2-552-XX
			4000 K	760 lm	104 lm/W				•	8033-A-2-553-XX
		25°	2700 K	630 lm	86 lm/W				•	8033-B-2-551-XX
			3000 K	630 lm	86 lm/W				•	8033-B-2-552-XX
			4000 K	680 lm	93 lm/W				•	8033-B-2-553-XX
		46°	2700 K	640 lm	87 lm/W				•	8033-C-2-551-XX
			3000 K	640 lm	87 lm/W				•	8033-C-2-552-XX
			4000 K	690 lm	94 lm/W				•	8033-C-2-553-XX
		Asymmetric	2700 K	620 lm	84 lm/W				•	8033-K-2-551-XX
			3000 K	620 lm	84 lm/W				•	8033-K-2-552-XX
			4000 K	660 lm	90 lm/W				•	8033-K-2-553-XX
		46°/16°	2700 K	660 lm	90 lm/W				•	8033-H-2-551-XX
			3000 K	660 lm	90 lm/W				•	8033-H-2-552-XX
			4000 K	720 lm	98 lm/W				•	8033-H-2-553-XX
	7.6 W	25° 46° Asymmetric 46°/16°	RGBW	660 lm	86 lm/W				•	8033-B-2-688-XX
			RGBW	740 lm	97 lm/W				•	8033-C-2-688-XX
			RGBW	620 lm	81 lm/W				•	8033-K-2-688-XX
			RGBW	780 lm	102 lm/W				•	8033-H-2-688-XX
	11 W	12°	2700 K	760 lm	69 lm/W	•				8033-A-3-548-XX
			3000 K	760 lm	69 lm/W	•				8033-A-3-549-XX
			4000 K	810 lm	73 lm/W	•				8033-A-3-550-XX
			2700 K	760 lm	69 lm/W			•		8033-A-4-548-XX
			3000 K	760 lm	69 lm/W			•		8033-A-4-549-XX
			4000 K	810 lm	73 lm/W			•		8033-A-4-550-XX
		25°	2700 K	670 lm	60 lm/W	•				8033-B-3-548-XX
			3000 K	670 lm	60 lm/W	•				8033-B-3-549-XX
			4000 K	730 lm	66 lm/W	•				8033-B-3-550-XX
			2700 K	670 lm	60 lm/W			•		8033-B-4-548-XX
			3000 K	670 lm	60 lm/W			•		8033-B-4-549-XX
			4000 K	730 lm	66 lm/W			•		8033-B-4-550-XX
	46°	2700 K	680 lm	61 lm/W	•				8033-C-3-548-XX	
		3000 K	680 lm	61 lm/W	•				8033-C-3-549-XX	
4000 K		730 lm	66 lm/W	•				8033-C-3-550-XX		
2700 K		680 lm	61 lm/W			•		8033-C-4-548-XX		
3000 K		680 lm	61 lm/W			•		8033-C-4-549-XX		
4000 K		730 lm	66 lm/W			•		8033-C-4-550-XX		
11 W	Asymmetric	2700 K	660 lm	60 lm/W	•				8033-K-3-548-XX	
		3000 K	660 lm	60 lm/W	•				8033-K-3-549-XX	
		4000 K	710 lm	64 lm/W	•				8033-K-3-550-XX	
		2700 K	660 lm	60 lm/W			•		8033-K-4-548-XX	
		3000 K	660 lm	60 lm/W			•		8033-K-4-549-XX	
		4000 K	710 lm	64 lm/W			•		8033-K-4-550-XX	
	46°/16°	2700 K	710 lm	64 lm/W	•				8033-H-3-548-XX	
		3000 K	710 lm	64 lm/W	•				8033-H-3-549-XX	
		4000 K	760 lm	69 lm/W	•				8033-H-3-550-XX	
		2700 K	710 lm	64 lm/W			•		8033-H-4-548-XX	
		3000 K	710 lm	64 lm/W			•		8033-H-4-549-XX	
		4000 K	760 lm	69 lm/W			•		8033-H-4-550-XX	
13 W	12° 46°/16°	3000 K	1040 lm	80 lm/W	•				8033-A-3-696-XX	
		3000 K	970 lm	74 lm/W	•				8033-H-3-696-XX	

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
										REMOTE	
SIRIUS 600		10 W	12°	2700 K	820 lm	82 lm/W	•				9066-A-3-474-01
				3000 K	820 lm	82 lm/W	•				9066-A-3-475-01
				4000 K	870 lm	87 lm/W	•				9066-A-3-476-01
			25°	2700 K	730 lm	73 lm/W	•				9066-B-3-474-01
				3000 K	730 lm	73 lm/W	•				9066-B-3-475-01
				4000 K	770 lm	77 lm/W	•				9066-B-3-476-01
			46°	2700 K	730 lm	73 lm/W	•				9066-C-3-474-01
				3000 K	730 lm	73 lm/W	•				9066-C-3-475-01
				4000 K	780 lm	78 lm/W	•				9066-C-3-476-01
			Asymmetric	2700 K	710 lm	71 lm/W	•				9066-K-3-474-01
				3000 K	710 lm	71 lm/W	•				9066-K-3-475-01
				4000 K	750 lm	75 lm/W	•				9066-K-3-476-01
			46°/16°	2700 K	770 lm	77 lm/W	•				9066-H-3-474-01
				3000 K	770 lm	77 lm/W	•				9066-H-3-475-01
				4000 K	810 lm	81 lm/W	•				9066-H-3-476-01
SIRIUS 1200		17 W	12°	2700 K	1550 lm	91 lm/W	•				9067-A-3-474-01
				3000 K	1550 lm	91 lm/W	•				9067-A-3-475-01
				4000 K	1650 lm	97 lm/W	•				9067-A-3-476-01
			25°	2700 K	1380 lm	81 lm/W	•				9067-B-3-474-01
				3000 K	1380 lm	81 lm/W	•				9067-B-3-475-01
				4000 K	1470 lm	86 lm/W	•				9067-B-3-476-01
			46°	2700 K	1390 lm	81 lm/W	•				9067-C-3-474-01
				3000 K	1390 lm	81 lm/W	•				9067-C-3-475-01
				4000 K	1480 lm	87 lm/W	•				9067-C-3-476-01
			Asymmetric	2700 K	1350 lm	79 lm/W	•				9067-K-3-474-01
				3000 K	1350 lm	79 lm/W	•				9067-K-3-475-01
				4000 K	1430 lm	84 lm/W	•				9067-K-3-476-01
			46°/16°	2700 K	1460 lm	85 lm/W	•				9067-H-3-474-01
				3000 K	1460 lm	85 lm/W	•				9067-H-3-475-01
				4000 K	1540 lm	90 lm/W	•				9067-H-3-476-01
SIRIUS 300		5 W	12°	2700 K	430 lm	86 lm/W	•				9068-A-3-474-01
				3000 K	430 lm	86 lm/W	•				9068-A-3-475-01
				4000 K	450 lm	90 lm/W	•				9068-A-3-476-01
			25°	2700 K	370 lm	74 lm/W	•				9068-B-3-474-01
				3000 K	370 lm	74 lm/W	•				9068-B-3-475-01
				4000 K	400 lm	80 lm/W	•				9068-B-3-476-01
			46°	2700 K	380 lm	76 lm/W	•				9068-C-3-474-01
				3000 K	380 lm	76 lm/W	•				9068-C-3-475-01
				4000 K	400 lm	80 lm/W	•				9068-C-3-476-01
			Asymmetric	2700 K	370 lm	74 lm/W	•				9068-K-3-474-01
				3000 K	370 lm	74 lm/W	•				9068-K-3-475-01
				4000 K	390 lm	78 lm/W	•				9068-K-3-476-01
			46°/16°	2700 K	400 lm	80 lm/W	•				9068-H-3-474-01
				3000 K	400 lm	80 lm/W	•				9068-H-3-475-01
				4000 K	420 lm	84 lm/W	•				9068-H-3-476-01
		7.3 W	12°	2700 K	700 lm	95 lm/W				•	9068-A-2-551-01
				3000 K	700 lm	95 lm/W				•	9068-A-2-552-01
				4000 K	760 lm	104 lm/W				•	9068-A-2-553-01
			25°	2700 K	630 lm	86 lm/W				•	9068-B-2-551-01
				3000 K	630 lm	86 lm/W				•	9068-B-2-552-01
				4000 K	680 lm	93 lm/W				•	9068-B-2-553-01
			46°	2700 K	640 lm	87 lm/W				•	9068-C-2-551-01
				3000 K	640 lm	87 lm/W				•	9068-C-2-552-01
				4000 K	690 lm	94 lm/W				•	9068-C-2-553-01
			Asymmetric	2700 K	620 lm	84 lm/W				•	9068-K-2-551-01
				3000 K	620 lm	84 lm/W				•	9068-K-2-552-01
				4000 K	660 lm	90 lm/W				•	9068-K-2-553-01
			46°/16°	2700 K	660 lm	90 lm/W				•	9068-H-2-551-01
				3000 K	660 lm	90 lm/W				•	9068-H-2-552-01
				4000 K	720 lm	98 lm/W				•	9068-H-2-553-01
11 W	12°	2700 K	760 lm	69 lm/W	•				9068-A-3-548-01		
		3000 K	760 lm	69 lm/W	•				9068-A-3-549-01		
		4000 K	810 lm	73 lm/W	•				9068-A-3-550-01		
	2700 K	760 lm	69 lm/W			•			9068-A-5-548-01		
		3000 K	760 lm	69 lm/W			•		9068-A-5-549-01		
		4000 K	810 lm	73 lm/W			•		9068-A-5-550-01		
2700 K	760 lm	69 lm/W			•			9068-A-4-548-01			
	3000 K	760 lm	69 lm/W			•		9068-A-4-549-01			
	4000 K	810 lm	73 lm/W			•		9068-A-4-550-01			
11 W	25°	2700 K	670 lm	60 lm/W	•				9068-B-3-548-01		
		3000 K	670 lm	60 lm/W	•				9068-B-3-549-01		
		4000 K	730 lm	66 lm/W	•				9068-B-3-550-01		
	2700 K	670 lm	60 lm/W			•			9068-B-5-548-01		
		3000 K	670 lm	60 lm/W			•		9068-B-5-549-01		
		4000 K	730 lm	66 lm/W			•		9068-B-5-550-01		
	2700 K	670 lm	60 lm/W			•			9068-B-4-548-01		
		3000 K	670 lm	60 lm/W			•		9068-B-4-549-01		
		4000 K	730 lm	66 lm/W			•		9068-B-4-550-01		

# SIRIUS

SIRIUS 300

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
									REMOTE	
OD-9068 	11 W	46°	2700 K	680 lm	61 lm/W	•				9068-C-3-548-01
			3000 K	680 lm	61 lm/W	•				9068-C-3-549-01
			4000 K	730 lm	66 lm/W	•				9068-C-3-550-01
			2700 K	680 lm	61 lm/W			•		9068-C-5-548-01
			3000 K	680 lm	61 lm/W			•		9068-C-5-549-01
			4000 K	730 lm	66 lm/W			•		9068-C-5-550-01
			2700 K	680 lm	61 lm/W		•			9068-C-4-548-01
			3000 K	680 lm	61 lm/W		•			9068-C-4-549-01
			4000 K	730 lm	66 lm/W		•			9068-C-4-550-01
	11 W	Asymmetric	2700 K	660 lm	60 lm/W	•				9068-K-3-548-01
			3000 K	660 lm	60 lm/W	•				9068-K-3-549-01
			4000 K	710 lm	64 lm/W	•				9068-K-3-550-01
			2700 K	660 lm	60 lm/W			•		9068-K-5-548-01
			3000 K	660 lm	60 lm/W			•		9068-K-5-549-01
			4000 K	710 lm	64 lm/W			•		9068-K-5-550-01
			2700 K	660 lm	60 lm/W		•			9068-K-4-548-01
			3000 K	660 lm	60 lm/W		•			9068-K-4-549-01
			4000 K	710 lm	64 lm/W		•			9068-K-4-550-01
	11 W	46°/16°	2700 K	710 lm	64 lm/W	•				9068-H-3-548-01
			3000 K	710 lm	64 lm/W	•				9068-H-3-549-01
			4000 K	760 lm	69 lm/W	•				9068-H-3-550-01
			2700 K	710 lm	64 lm/W			•		9068-H-5-548-01
			3000 K	710 lm	64 lm/W			•		9068-H-5-549-01
			4000 K	760 lm	69 lm/W			•		9068-H-5-550-01
2700 K			710 lm	64 lm/W		•			9068-H-4-548-01	
3000 K			710 lm	64 lm/W		•			9068-H-4-549-01	
4000 K			760 lm	69 lm/W		•			9068-H-4-550-01	

Private Residence – THAILAND



Living Complex, Bangkok – THAILAND

