


Art.no. 55267-402

EAN 7320046423933

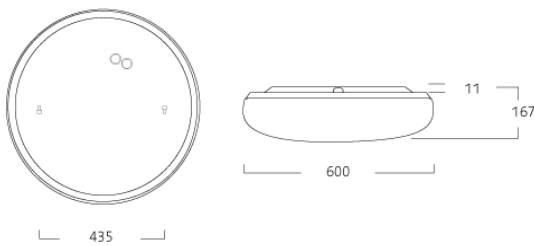

A round-beam decorative luminaire for ceiling or wall installation in two sizes for entrances and stairwells, for example.

Installation Two securing holes for wall mounting. IP 40. IP 41 is available upon request.

Connection Snap-in terminal block 5x2.5 mm², 1-phase through-wiring possible. Cable entry from top of the luminaire. Surface mounted mains cable possible, through-wiring 180°.

Design Diffuser in specular opal acrylic. Luminaire body/decorative edge ring in aluminium. Decorative edge ring enamelled in glossy black (RAL 9005) or clear lacquered brushed aluminium.

Dimming DALI/Phase-pulse control as standard.

e-Sense Detect - microwave sensors with lux threshold. Presence control on/off via relay or high/low, alternatively high/low/off via DALI.

e-Sense Flex - Integrated sensors with ambient light sensor. Presence/absence control high/low/off. Wireless communication via Bluetooth mesh, equipped with microwave sensor.

Tibi Ceiling/Wall

Direct, DALI/Phase-pulse, Opal

DESIGN

Light distribution Direct	Louvre Opal
Diffuser Opal	Colour Black
RAL 9005	

LIGHT DATA & PERFORMANCE

Lumen output 3880	CLO function active Yes
CLO time, h 50000	lm/W 135
CCT, K 4000	CRI 80
SDCM 3	Melanopic DER 0.600
Lumen maintenance 50 000 h L100	Lumen maintenance 75 000 h L86
Lumen maintenance 100 000 h L82	Lumen maintenance L100 B50, h 50000
LED driver, h/max failure % 100000/10	Energy class, LED module C

CONTROLS & CONNECTIVITY

Light control DALI/Phase-pulse	Driver brand Tridonic
Power on last level Yes	Corridor function Yes
Switch control, max no. 25	AM Yes
ZD4i Certified False	Daylight functionality False

ELECTRICITY & ENCLOSURE

Rated supply voltage, V 220-240	Mains frequency, Hz 0, 50, 60
Protective class 1	IP rating 40
Start W 29	End W 32
Average W 30.5	Stand by W 0.15
Min. ambient temperature, °C -25	Max. ambient temperature, °C 25
MCB B10A, pcs 13	MCB B16A 22
MCB C10A 21	MCB C16A 36
THD, % 7	Surge protection CM, kV/kA 2
Surge protection DM, kV/kA 1	Power factor, 100 % 0.97

DIMENSIONS

Height, mm 167	Diameter, mm 600
Weight, kg 6	