

# ZOUK

- WALL RECESSED
- WALL SURFACE MOUNT



**ZOUK** is delicately designed and engineered for slim profile surface mounted and wall recessed light, featured low glare with screw-less appearance. Manufactured from LM6 Aluminum the housing is built to last and be situated in the the harshest of climates. The coating of Nano Ceramic film and double layer of durable paint ensures longevity. Built with the mindset of light comfort and soft visualization. Light source is CRI > 80 with an offering of 2700K, 3000k and 4000k. Available in various designs to compliment both commercial and residential applications.



[www.unilamp.co.th/en/p/zouk](http://www.unilamp.co.th/en/p/zouk)

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



*\*\*Custom colors are available on request.*



**1. Body Housing.**

Enhanced LM6 die-cast aluminum housing with 16-step coating process including nano ceramic film. Low copper content <0.1%

**2. Diffuser**

Impact resistant safety tempered glass diffuser with etched surface . Light spread evenly on the ground.

**3. LED**

Array of mid power LED from world renowned manufacturer. Module attached directly to the body for fastest heat transfer. 2700K, 3000K and 4000K CRI>80 3-Step SDCM.

**4. Driver**

High quality LED constant current driver. Conform to applicable safety standards and electromagnetic compatibility.


**5. Screw less**

Clear and clean cut design. No visible screw from mounting point of view.


# ZOUK





ZOUK1 / ZOUK1 – CVDA



ZOUK2 / ZOUK2 – CVDA



Mini ZOUK2



## ZOUK

Application Type : Wall recessed  
Subgroup : Directed wall recessed light

ZOUK1 / ZOUK1 – CVDA / 6067  
ZOUK2 / ZOUK2 – CVDA / 6068  
Mini ZOUK 2 / 6069

### Luminaire Performance

210 – 710 lm  
5.9 – 11 W  
27 – 79 lm/W

### Beam Options



### Color Temperature

2700K/ 3000K/ 4000K

### Controller

Integrated driver with On-Off control  
24V Remote driver with On-Off/ DALI control [CVDA]

### Input Options

24Vdc  
220-240Vac 50/60Hz

### Accessories




CV Driver



ZOUK1 / ZOUK1 – CVDA

ZOUK2 / ZOUK2 – CVDA

ZOUK3 / ZOUK3 – CVDA

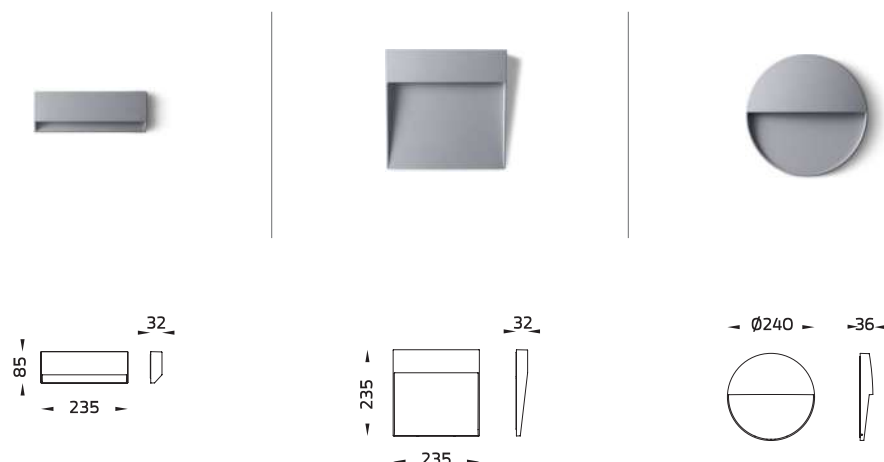

**ZOUK**

Application Type : Wall surface mount  
 Subgroup : Directed wall light

ZOUK1 / ZOUK1 – CVDA / 7052  
 ZOUK2 / ZOUK2 – CVDA / 7053  
 ZOUK3 / ZOUK3 – CVDA / 7054

**Luminaire Performance**

240 – 440 lm  
 5.9 – 11 W  
 30 – 52 lm/W

**Beam Options**



**Color Temperature**

2700K/ 3000K/ 4000K


**Controller**

Integrated driver with On-Off control  
 24V Remote driver with On-Off/ DALI control [CVDA]









**Input Options**

24Vdc  
 220-240Vac 50/60Hz

**Accessories**



# ZOUK

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
									
ZOUK1/CVDA	<b>OD-6067</b> 	5.9 W	N/A	3000 K 4000 K	210 lm 220 lm	35 lm/W 37 lm/W		• •	6067-0-7-684-XX 6067-0-7-685-XX
		11 W	N/A	2700 K 3000 K 4000 K	300 lm 300 lm 320 lm	27 lm/W 27 lm/W 29 lm/W	• • •		6067-0-3-527-XX 6067-0-3-936-XX 6067-0-3-939-XX
ZOUK2/CVDA	<b>OD-6068</b> 	5.9 W	N/A	3000 K	470 lm	79 lm/W		•	6068-0-7-684-XX
		11 W	N/A	2700 K 3000 K 4000 K	660 lm 660 lm 710 lm	60 lm/W 60 lm/W 64 lm/W	• • •		6068-0-3-527-XX 6068-0-3-936-XX 6068-0-3-939-XX
Mini ZOUK2	<b>OD-6069</b> 	7 W	N/A	2700 K 3000 K 4000 K	240 lm 250 lm 220 lm	34 lm/W 35 lm/W 31 lm/W	• • •		6069-0-3-560-XX 6069-0-3-921-XX 6069-0-3-922-XX
ZOUK1/CVDA	<b>OD-7052</b> 	5.9 W	N/A	2700 K 3000 K 4000 K	270 lm 270 lm 290 lm	45 lm/W 45 lm/W 49 lm/W		• • •	7052-0-7-683-XX 7052-0-7-684-XX 7052-0-7-685-XX
		11 W	N/A	2700 K 3000 K 4000 K	380 lm 380 lm 330 lm	34 lm/W 34 lm/W 30 lm/W	• • •		7052-0-3-527-XX 7052-0-3-936-XX 7052-0-3-939-XX
ZOUK2/CVDA	<b>OD-7053</b> 	5.9 W	N/A	3000 K	240 lm	40 lm/W		•	7053-0-7-684-XX
		11 W	N/A	2700 K 3000 K 4000 K	340 lm 340 lm 340 lm	30 lm/W 30 lm/W 30 lm/W	• • •		7053-0-3-527-XX 7053-0-3-936-XX 7053-0-3-939-XX
ZOUK3/CVDA	<b>OD-7054</b> 	5.9 W	N/A	3000 K	310 lm	52 lm/W		•	7054-0-7-684-XX
		11 W	N/A	2700 K 3000 K 4000 K	440 lm 440 lm 400 lm	40 lm/W 40 lm/W 36 lm/W	• • •		7054-0-3-527-XX 7054-0-3-936-XX 7054-0-3-939-XX

\*Please contact sales team for special request.

