4 Unilamp




ACCENT LINEAR LIGHT







www.unilamp.co.th/en/p/luxbeat

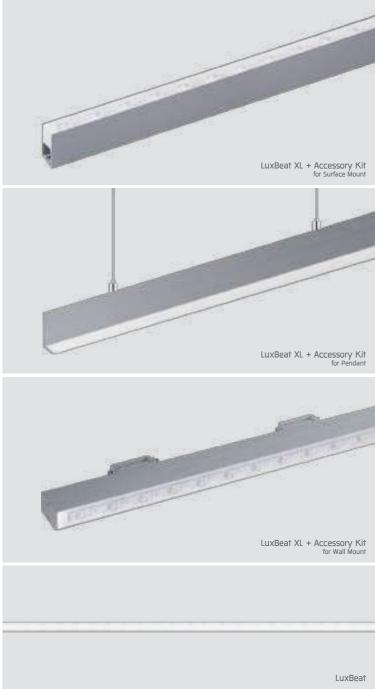

LuxBeat and **LuxBeat** XL are a range of miniature sized linear accent luminaires with flexible and fixed application. The patented optical system emits homogenous light regardless of the viewing direction.

LuxBeat is the designer's choice for unconstraint creative light installations. High contrasting illumination of building elements is easily possible with the tiny luminaire dimensions and state of the art LED performance.

LuxBeat XL offers a robust aluminum housing that contains a wiring channel for the electrical connection. Bottom mounted in and out connector's assure shadow free easy installation. LuxBeat XL is available as flexible, fixed and tiltable surface mount luminaire, recessed wall and ceiling light, pendant light and inground uplighter. Shorter luminaire lengths are available upon request.

The luminaire is top bendable and can be shortened on site. The use of optional stainless steel mounting clips eliminates the time-consuming pretreatment of the installation surface.













LuxBeat Features:

- IP67 for indoor/ outdoor application.
- No heat sink required. Extra heat sink is recommended if Ta is over 40°C
- High quality silicone extrusion housing.

 Dot-free linear and homogeneous lighting performance.

- Very flexible top-bend style in ultra-thin appearance.
 Infield cutting and assembly (if needed).
 Simple mounted on clean surface by 3M tape (supplied with the strip). Or stainless steel mounting bracket (available as accessory).
- Perfect color consistency and uniformity.
- High light efficacy.
- No dark angle emitting part on both ends.

LuxBeat XL Features:

- IP67 for indoor/ outdoor application.
- Supplied with IP67 cable feeding in-out for continuous installation.
- High quality silicone extrusion housing.

 Dot-free linear and homogeneous lighting performance (diffused version).
- Various mounting options. Choices of diffused light or with optical lens.
- Perfect color consistency and uniformity.
- High light efficacy. No dark angle emitting part on both ends (diffused version). Custom length is available (prepared by the factory).

Notice:

- Use suitable power supply with at least 20% power reserve.


 Maximum continuous installation length is 5m. Longer installation runs will result in electrical overload and excessive heat.
- Check correct polarity before power on.
 For outdoor application, make sure that proper silicone gluing is in place in order to maintain IP67 rating.
 Minimal bending diameter 30 mm. smaller bending diameter causes
- damage to the LED module.
- Installation, dismantling and repairs must be carried out by qualified electrician.

LuxBeat XL

LuxBeat


LuxBeat






LuxBeat

ACCENT LINEAR LIGHT

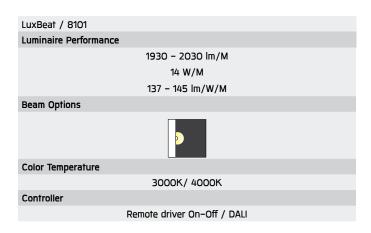




LuxBeat XL 500/ LuxBeat XL 1000/ LuxBeat XL 2000









Model	L	LT
OD-8111 LED	500	506
OD-8112 LED	1000	1006
OD-8113 LED	2000	2006

LuxBeat XL

NEW!

ACCENT LINEAR LIGHT

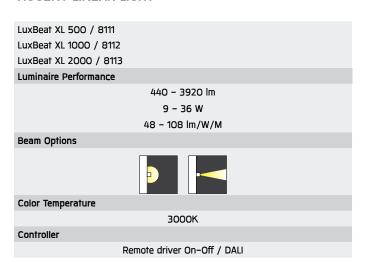



LuxBeat

+
Ū
W
$\mathbf{\omega}$
×
_

Product Code	Product Name	Luminaire Wattage	Beam	сст	Luminaire Lumen	Controller
OD-8101	LuxBeat	14 W/M	120° 120°	3000 K 4000 K	1930 lm/M 2030 lm/M	Remote driver On-Off / DALI Remote driver On-Off / DALI
OD-8111 Optical	LuxBea† XL 500	9 W	30°	3000 K	980 lm	Remote driver On-Off / DALI
OD-8111 Diffused	LuxBeat XL 500	9 W	120°	3000 K	440 lm	Remote driver On-Off / DALI
OD-8112 Optical	LuxBeat XL 1000	18 W	30°	3000 K	1960 lm	Remote driver On-Off / DALI
OD-8112 Diffused	LuxBeat XL 1000	18 W	120°	3000 K	880 lm	Remote driver On-Off / DALI
OD-8113 Optical	LuxBeat XL 2000	36 W	30°	3000 K	3920 lm	Remote driver On-Off / DALI
OD-8113 Diffused	LuxBeat XL 2000	36 W	120°	3000 K	1760 lm	Remote driver On-Off / DALI

- Application Reference











Unilamp Co., Ltd.

461 Ramintra Road, Kannayao, Bangkok 10230 Thailand Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1 Fax : +66[0]2 943 2419

unilamp@unilamp.co.th | online@unilamp.co.th

