

ECLIPSE



www.unilamp.co.th/en/p/eclipse


■ GENERAL WALL LIGHT



ECLIPSE is a round-shaped wall or ceiling fitting with a decorative element of 360° side emission. It has a well-made aluminium construction and high impact resistant polycarbonate cover. The high protection rating of IP65 and IK09 allows **ECLIPSE** to be installed in the harshest outdoor environment. With the diffused light distribution, it provides general lighting to private places, public areas and commercial areas. **ECLIPSE** utilizes high quality LED light source and is available in both 3000K and 4000K.



ECLIPSE

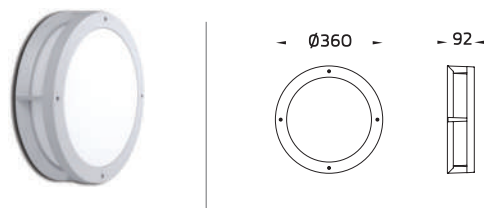

Specification

- Designed, Manufactured and tested according to IEC 60598.
- LM6 Die Cast Aluminium body.
- Stainless steel screws.
- Nano Ceramic surface conversion.
- Double layer coating.
- Polycarbonate diffuser.
- Post-cured silicone gasket.
- High quality AC LED module. Replaceable for future upgrade.
- Weather proof TPE grommet.
- Installation work has to be carried out according to the enclosed product manual.

Available Color

Black	[replace the last 2 digits of ordering code with O1]
Graphite	[replace the last 2 digits of ordering code with O2]
Dark Grey	[replace the last 2 digits of ordering code with O3]
Aluminium Silver	[replace the last 2 digits of ordering code with O4]
White	[replace the last 2 digits of ordering code with O6]
Wooden Brown	[replace the last 2 digits of ordering code with O7]

ECLIPSE

GENERAL WALL LIGHT

ECLIPSE / 7023

Luminaire Performance

1630 – 1710 lm

29 W

56 – 59 lm/W

Beam Options



Color Temperature

3000K/ 4000K

Controller

AC LED with On-Off control