

LED LINEAR™

A Fagerhult Group Company



LINEAR LIGHTING SOLUTIONS  
FROM α ALPHA TO Ω OMEGA

## ABOUT US

## LIGHT IS OUR PASSION

Founded in May 2006, our enterprise supplies high quality linear LED lighting solutions based on flexible printed circuit boards worldwide. Our offer is a cost effective, unique modular LED tool kit for interior or exterior linear lighting solutions - from mood to general lighting - with an ingress protection of up to IP67.

Our international awards and reference projects, including exquisite lighting solutions for decorative or architectural applications, stand as proof of our high quality manufacturing philosophy. Based on this philosophy and the depth of our LED knowledge we are constantly working on improving products for your lighting requirements. Throughout the following pages, we invite you to familiarize yourself with the LED Linear™ world of experience.



### ⊖ LINEAR

Continuous illumination without any breaks. Linear lighting can be smartly integrated into architectural details. Lighting then appears well thought of, seamless and unobtrusive. It increases the quality of life in cities, makes intelligent factories more efficient, it strengthens well-being and productivity in the office and in education, it increases guest comfort in the hospitality industry and creates new shopping experiences in shopping areas.

### ⊕ MODULAR

Modular stands for versatile combinations. Our product portfolio is based on a modular construction toolkit. Configure your individual lighting solution according to your wishes. You select: mounting type, protection grade, color rendition, color temperature, luminosity, wattage, optic and profile - we offer your desired product!

### ∞ INFINITE

You can look forward to more than 30 million standard variations, which will leave endless lighting solutions for your lighting task. Whether you would like to provide contour lighting for a 300 meter high facade, illuminate a waterscape, equip an office complex with efficient light, or create mood light in the private sector - and your imagination inspires us!

CONTENT

! THE PAGE NUMBERS DO NOT MATCH THE PRINTED 2019/2020 CATALOG.

INTRO 5 – 23

OUTDOOR 24 – 107

<b>FLEXIBLE LIGHT LINES</b> .....	26
VarioLED™ Flex VENUS family True Color IP67 .....	28
VarioLED™ Flex VENUS family IP67 .....	32
VarioLED™ Flex AMOR IP67 .....	36
VarioLED™ Flex NIKE family IP67 .....	40
VarioLED™ Flex IP67 .....	44
HYDRALUX™ IP67 .....	48
<b>RIGID LIGHT LINES</b> .....	52
ADONIS IP67 .....	54
<b>NEW</b> XOO LINE™ IP67 .....	58
XOOLUM™ IP67 .....	62
XOOLUM™ Reflector IP67 .....	66
XOOLUM™ Reflector Wall Wash IP67 .....	70
XOOLIGHT™ IP67 .....	74
VarioLED™ IP67 .....	78
<b>IN-GROUND</b> .....	82
VarioLED™ OCEANOS IP67 .....	84
<b>GRAZER</b> .....	88
XOOLUX™ NANO IP67 .....	90
KALYPSO IP67 .....	94
VarioLED™ OCEANOS IP67 .....	98
<b>UNDER WATER</b> .....	102
NEPTUNE IP68 .....	104

INDOOR 108 – 201

<b>ALLROUNDER</b> .....	110
<b>ULTIMA family IP40</b> .....	112
ULTIMA-S IP40 .....	114
ULTIMA-T IP40 .....	118
<b>NEW</b> XOO LINE™ IP40 .....	122
LYRA IP40 .....	126
XOOLUM™ IP40 .....	130
LUNA IP40 .....	134
<b>GENERAL LIGHTING &amp; TASK LIGHTING</b> .....	138
ULTIMA-P IP40 .....	140
<b>NEW</b> MARS ARCHITECTURAL IP40 - Pendant .....	144
<b>NEW</b> MARS ARCHITECTURAL IP40 - Recessed .....	148
<b>NEW</b> MARS ARCHITECTURAL IP40 - Surface .....	152
XOOMINAIRE™ 4292 IP20/IP40 .....	156
XOOLUM™ Opal Continuous IP40 .....	160
XOOLUM™ Reflector IP20 .....	164
<b>COVE</b> .....	168
XOOCOVE IP40 .....	170
<b>WALL WASH</b> .....	174
MARS Wall Wash IP20 .....	176
XOOLUM™ Reflector Wall Wash IP20 .....	180
<b>IN-GROUND</b> .....	184
ADONIS .....	186
KALYPSO .....	190

FLEXIBLE LIGHT ENGINE 194 – 205

LED Linear™ Technology .....	196
<b>NEW</b> Flex LED tape Static White .....	198
Flex LED tape Tunable White .....	200
Flex LED tape RGBW & RGB .....	202
Flex LED tape Static Color .....	202
Applications - Overview .....	204

MIX & MATCH 206 – 211

Tape, Profile, Cover, Mounting, Accessories .....	208
Portfolio Overview .....	210

DESIGN LUMINAIRES 212 – 219

ULTIMA-P .....	214
LYRA ECLIPSE IP40 .....	216
XOOTUBE™ 38 IP40 .....	217
FIRE DANCE IP40 .....	218
XOOM™ IN / XOOM™ OUT .....	219

TECHNICAL APPENDIX 220 – 249

# HOW TO FIND THE RIGHT PRODUCT?

With this catalogue you have many possibilities to find the right product for your desired application.

Search by:

- Lumen and size **14 – 17**
- Optics and light distribution **18 – 21**
- Portfolio Overview **attached at the end of the catalogue**

As usual you can find all technical information and reference pictures of our luminaires on our website.

[www.led-linear.com](http://www.led-linear.com)

OUTDOOR



Photo 1: Omri Amsalem Photo 02: Ismail Gamal Abdulla, LED Linear™ Photo 05: Lane Barden Photo 06: Andrew Worssam Photo 07: Günther Fotodesign, LED Linear™ Photo 08: Photowalas

OUTDOOR



Photo 01: Luke Hayes Photo 02: Alex Haw Photo 04: Frédérique Félix-Faure, François Moura, Guillaume Ombreux Photo 05: Luke Hayes Photo 06: Amphitype Photo 08: Ludovic Loewert

INDOOR



Photo 01: Shutterstock.com / Zhu Difeng Photo 02: Pirjo Lindfors Photo 03: Jonathan Taylor at Cloud 9 Photography Photo 04: Miguel Coll Photo 05: Daniel Kessler Photo 06: Fernando Alda Photo 07: Álvaro Valdecantos 08: Whitelight Studio Berlin, Jens Bösenberg

INDOOR


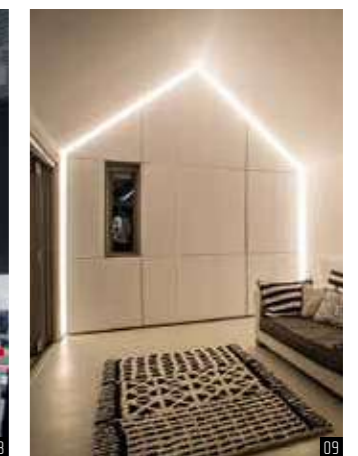


Photo 01: Akito Goto/ goto photo office Photo 02: KKS Strategy LLP / Timothy Soar Photo 03: Kevin Chu + Jessica Paul - Architectural photographers Photo 04: Contagious Agency Photo 05: Luke Hayes Photo 06: Hilton Hotels & Resorts Photo 07: Florian Monheim Photo 08: Shutterstock.com / Fiphoto Photo 09: Chris Orange

# OUR CORE TECHNOLOGY



## Premium LEDs and R2R production process

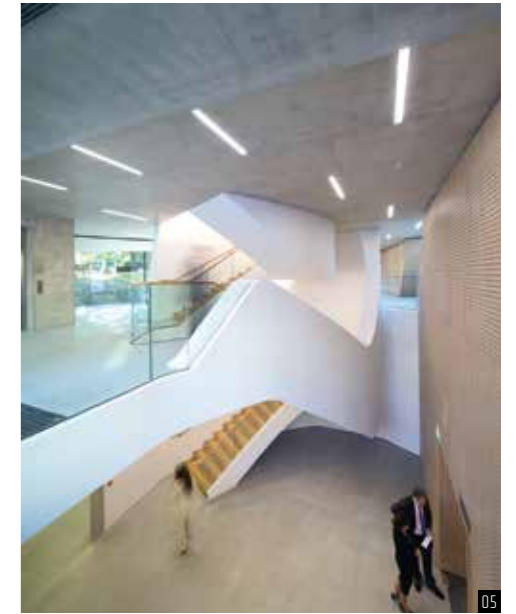

One of our Reel-to-Reel tape production line at our production site in Germany.

As trivial as it sounds, a great luminaire starts with a great light source. We, at LED Linear™, consider this aspect to be the key to a unique lighting experience. We carefully select the best LED packages available in terms of quality and reliability. Using our state-of-the-art Reel-to-Reel (R2R) process production lines, these LEDs are soldered automatically in a precise manner with numerous in-line inspections. This production process offers LED tapes without stairway-high loss-effect between cut lengths and improved mechanical stability due to homogeneous flexible material compared to sheet-to-sheet or rigid PCB light modules.



## NanoRay technology

**NanoRay** is a new **technology** enabling the engineering and the production of nano structured optics. The size of the structures is comparable to 1/10 of a human hair which enables an absolute control of the lighting distribution, as well as the color over angle.

In order to get these new optics to work at their best, the smallest possible light source is needed. LED manufacturers offered the perfect solution: Chip Scale Package LEDs (CSP). This new generation of LEDs is only 1 x 1 mm and offers many advantages such as better thermal management. That means a better lifetime and an outstanding color rendition performances compared to previous technologies. With the newest generation of LED - CSP which have a better CRI and R9 value we could start to use these optics. Thanks to this combination LED Linear™ was able to shrink the footprint of their luminaires while improving its performances.



## Luminaire encapsulation



Polyurethane potting stations allowing the production of IP67 light lines up to 10 m in length. PU shows superior test performance compared to silicone and is more water-proof as others. It also outperforms other encapsulation technologies in terms of chemical resistance.



## TrueColor technology

The world's first fully encapsulated flexible homogeneous light line VarioLED™ VENUS IP67 family was originally available in two bending directions - horizontal plane (SV) and vertical plane (TV). Besides the bending direction they also differed from each other by geometry, effective color temperature and lumen output. We upgraded our lighting pioneer product by introducing our new VarioLED™ VENUS True Color IP67 range which is again available in the bending direction vertical plane (TV), and now also able to bend in all 3 directions (3D). The **TrueColor technology** allows to combine both these fixtures in a single application or even a single line thanks to no difference in their CCT, the same geometry and the same lumen output.

# ICON OVERVIEW

OUTDOOR / INDOOR

You will find these icons on every product page referring to the different features of the product.

Feature	
	TrueColor technology
	NanoRay technology
	NanoRay technology 2.0
	Low glare
	Field cuttable
	Tool free installation
	Continuous row
	Drive over
	Stainless steel housing
	Recessed
	Surface-mounted / Ceiling
	Pendant
	Two flames
	Ground surface-mounted
	In-ground
	Wall-mounted
	Recessed (under water)
	Surface-mounted (under water)

### Technical Data / Performance

	Statoc White		IP00		Lifetime White / IQ White
	Tunable White		IP20		Lifetime White / IQ White
	Color		IP20 / IP40		Lifetime White / IQ White
	RGB		IP40		Lifetime RGB
	RGBW		IP67		Impact resistant
	Reel-to-reel (R2R) production		IP68		Top view R <sub>min</sub> = 15 cm
	Electronic design				Side view R <sub>min</sub> = 15 cm
	OneBinOnly				3D bendable R <sub>min</sub> = 15 cm
	Thermal management				

Download "Icon Overview"

# EASY TO SPECIFY

Customize your own luminaire with the LED Linear™ online configurator on our website [www.led-linear.com](http://www.led-linear.com)



Choose your right product with 3 options.

- by product type
- by application type
- directly to the product section



After selecting the right luminaire family you can customize the product to your individual needs in the final configuration.

All data information of the configured product is available for download e.g. data sheet, photometric files (.ies/.ldt), mounting instructions etc.




At the end of your configuration process you will get your custom made spec sheet with all relevant information related to your configured luminaire, accessories in appropriate quantities, PSU controls, wiring and maximal feed length.



# OUTDOOR IP67

All dimensions in the scale 1:1


Brightness Color temperature 2,700 K

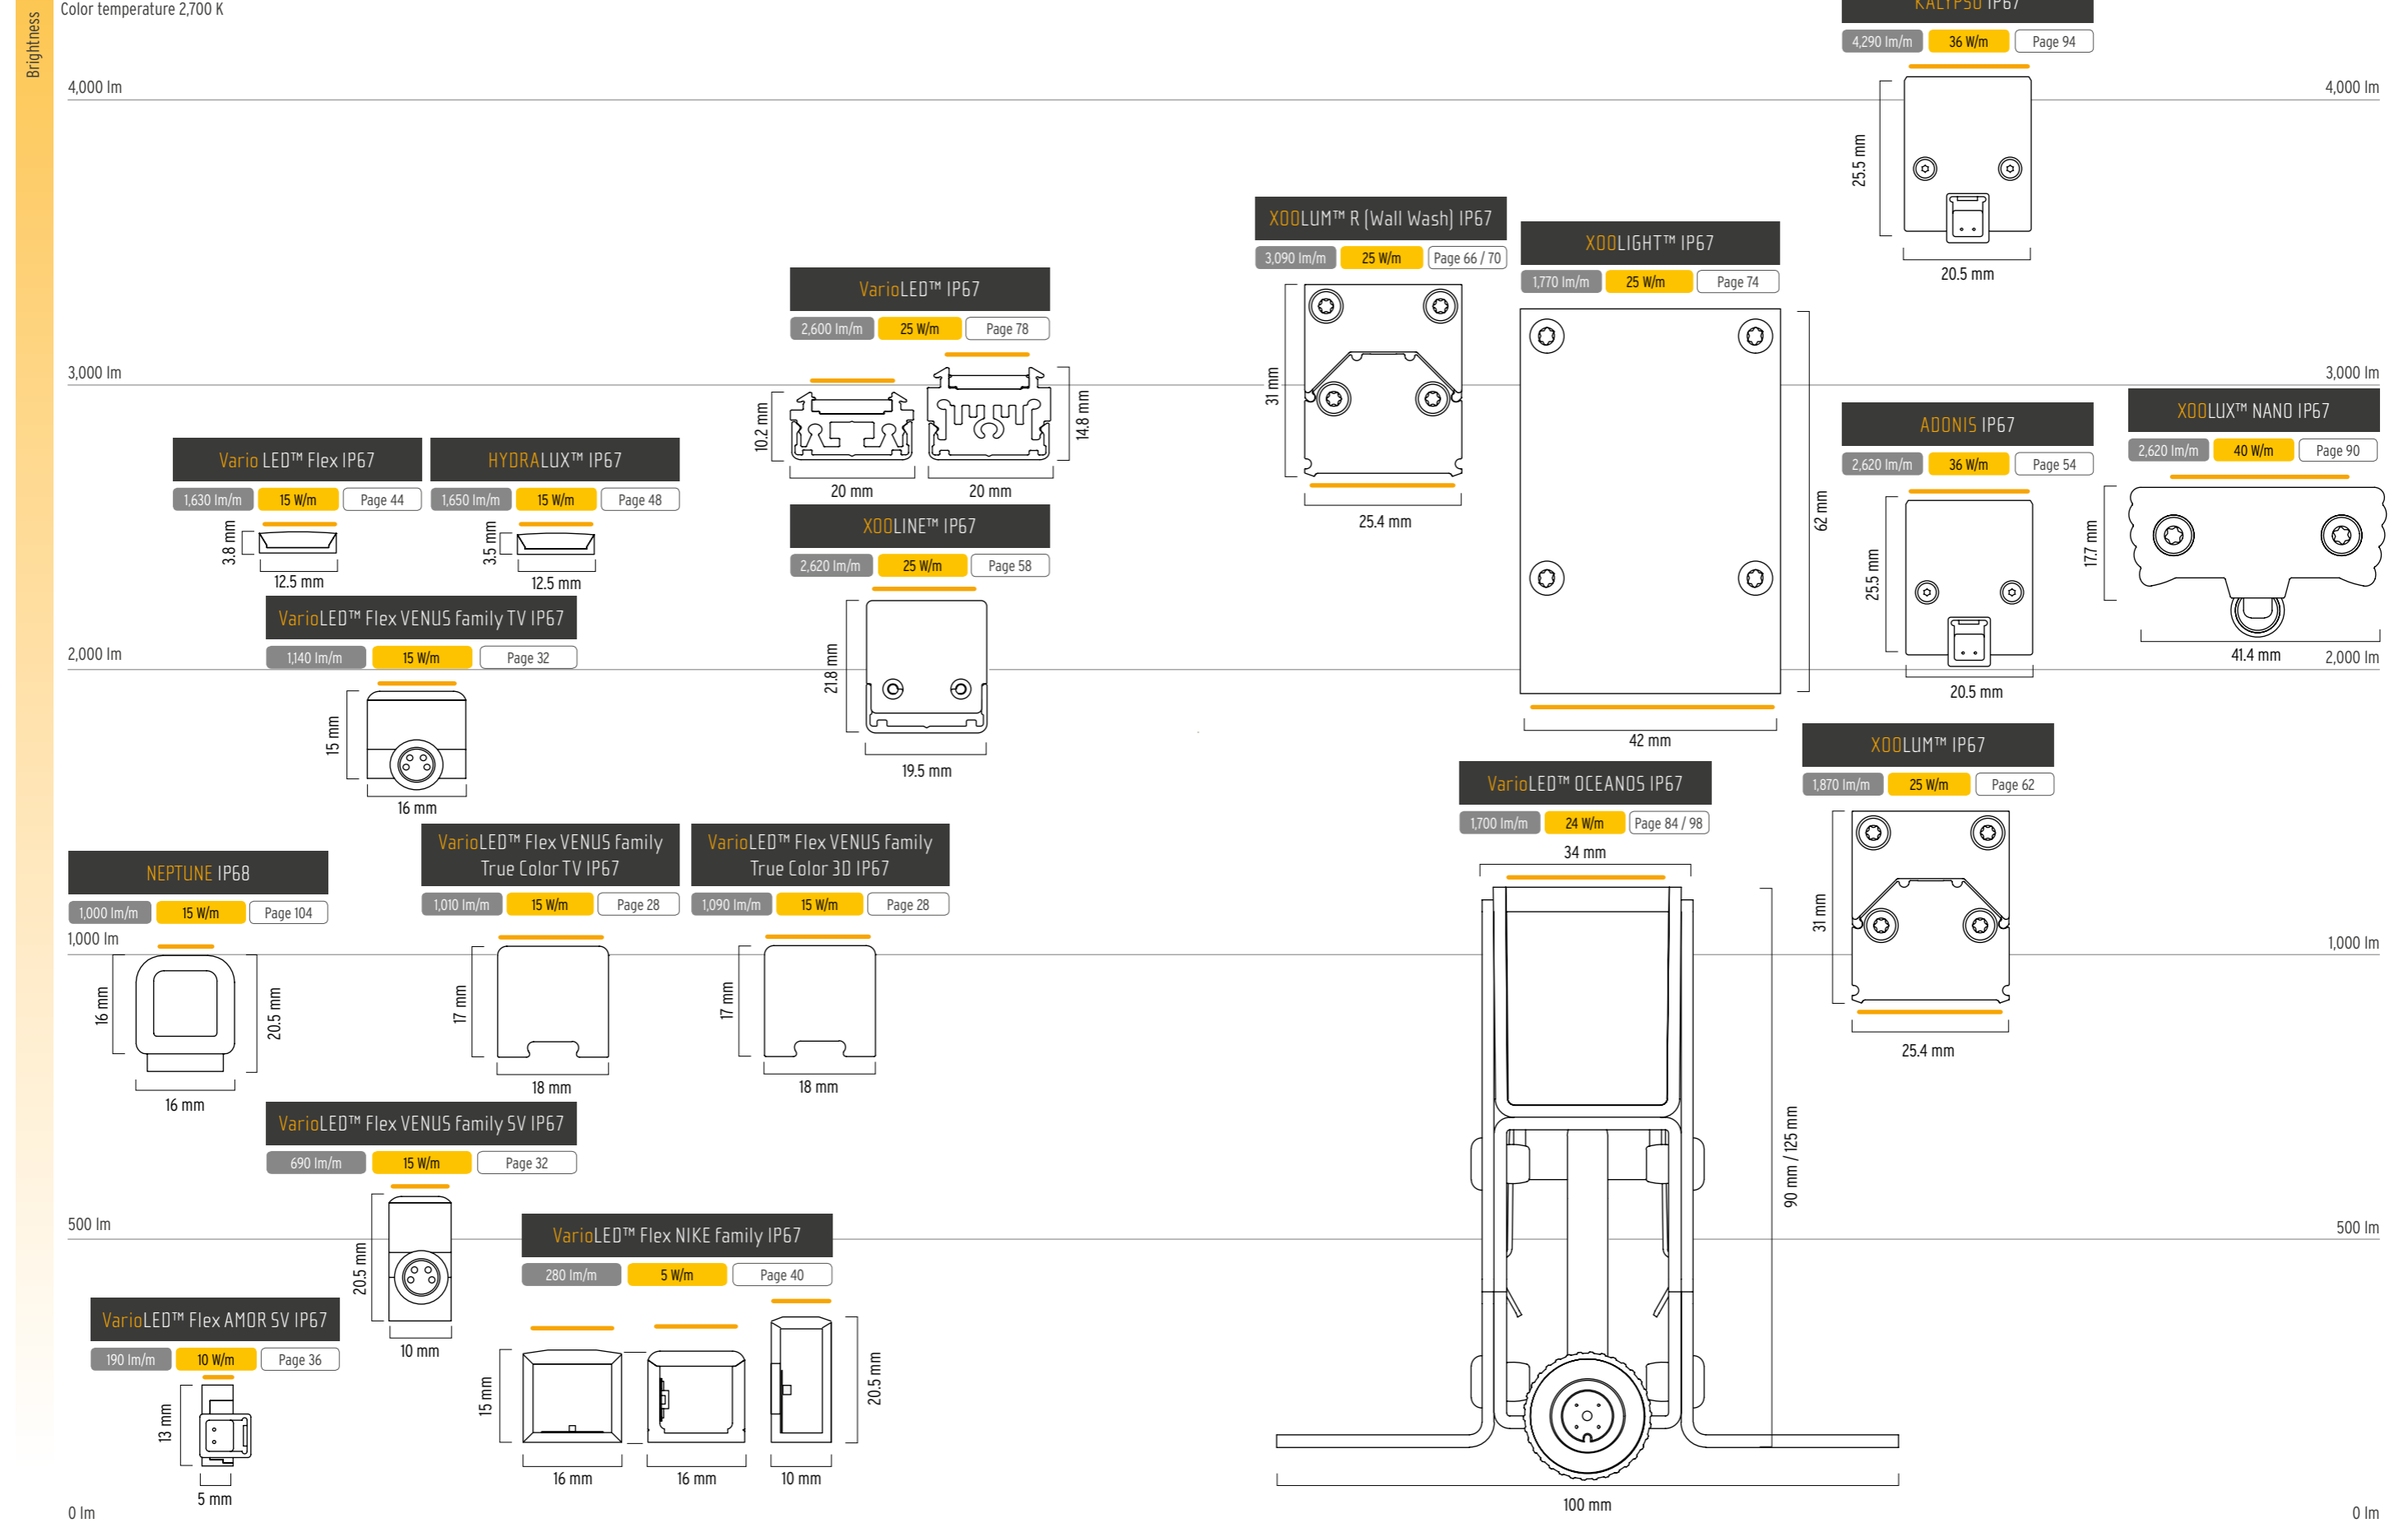



# INDOOR IP20 / IP40

All dimensions in the scale 1:1

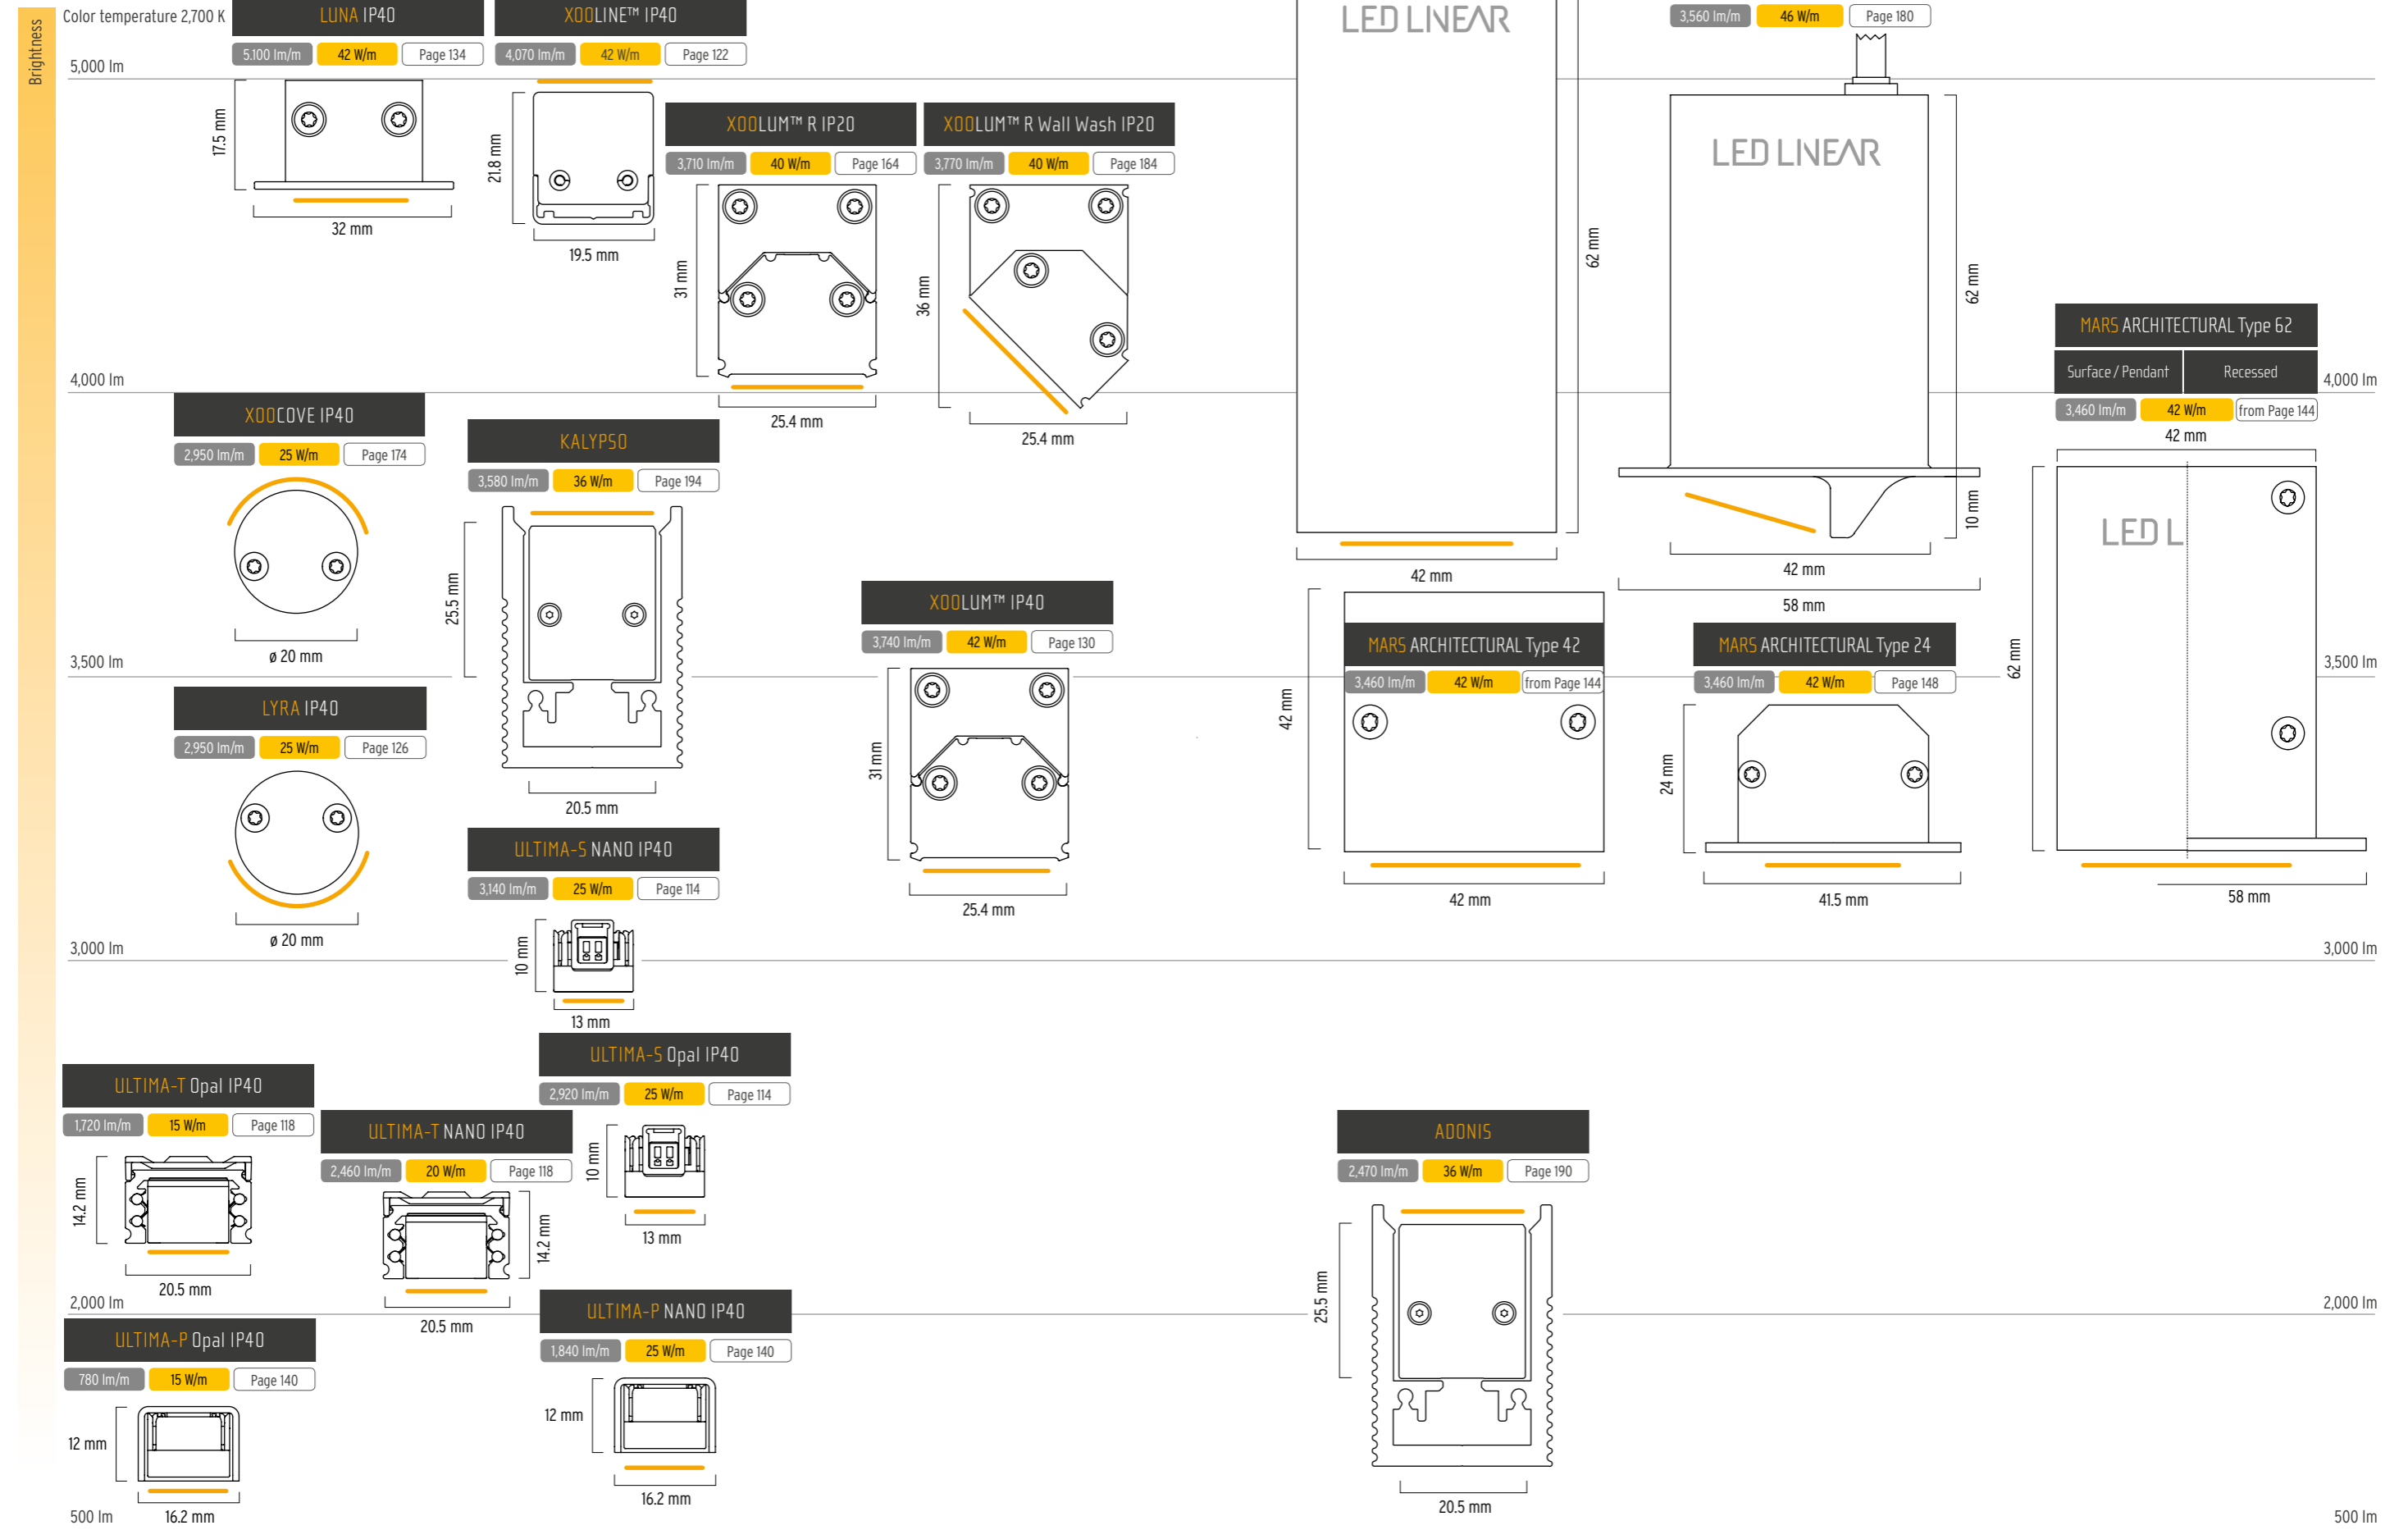

Small size Large size


















— = Light surface  
LED Linear™ GmbH

LED Linear™ GmbH

INTRO  
OUTDOOR  
INDOOR  
FLEXIBLE LIGHT ENGINE  
MIX & MATCH  
DESIGN LUMINAIRES  
APPENDIX


























# OUTDOOR IP67

Optic combinations

	10°	15°	25°	30°	60°	65°		120°	220°	15° x 40°	Opal Encapsulation	Clear Encapsulation	Opal Cover (L <sup>2</sup> )	Diffuse Cover (L <sup>2</sup> )	Clear Cover	Page
 VarioLED™ Flex VENUS family True Color IP67								✓			✓					28
 VarioLED™ Flex VENUS family IP67								✓			✓					32
 VarioLED™ Flex AMOR IP67											✓					36
 VarioLED™ Flex NIKE family IP67											✓					40
 VarioLED™ Flex IP67												✓				44
 HYDRALUX™ IP67												✓				48
 ADONIS IP67											✓					54
 XOOLINE™ IP67								✓			✓		✓	✓	✓	58
 XOOLUM™ IP67											✓					62
 XOOLUM™ R IP67																66
 XOOLUM™ R Wall Wash IP67																70
 XOOLIGHT™ IP67											✓					74
 VarioLED™ IP67								✓				✓				78
 VarioLED™ OCEANOS IP67	✓			✓							✓	✓				84 / 98
 XOOLUX™ NANO IP67		✓	✓							✓						90
 KALYPSO IP67	✓			✓	✓											94
 NEPTUNE IP68									✓							104

# INDOOR IP20 / IP40

Optic combinations


	10°	15°	25°	30°	40°	60°	65°	WW	Batwing	Asym-metric	Opal Cover (120°)			Diffuse Cover (120°)			Clear Cover (120°)		Opal Encapsu-lation	Clear Encapsu-lation	Page
												L²	H²	R	L²	H²	R	L²	R		
 ULTIMA family IP40		✓	✓		✓	✓		✓	✓	✓	✓										112
 XOOLINE™ IP40	✓			✓		✓					✓	✓	✓	✓	✓	✓	✓	✓			122
 LYRA IP40	✓			✓		✓															126
 XOOLUM™ IP40											✓			✓			✓				130
 LUNA IP40	✓			✓		✓					✓	✓	✓	✓	✓	✓	✓	✓			134
 ULTIMA-P IP40					✓		✓		✓										✓		140
 MARS ARCHITECTURAL family IP40		✓	✓		✓		✓														144
 XOOMINAIRE™ 4292 IP20/IP40			✓				✓				✓										156
 XOOLUM™ OC IP40											✓			✓			✓				160
 XOOLUM™ R IP20			✓				✓														164
 XOOCOVE IP40						✓															174
 MARS Wall Wash IP20								✓													180
 XOOLUM™ R Wall Wash IP20								✓													184
 ADONIS																			✓		190
 KALYPSO	✓			✓		✓															194

# PAGE EXPLANATION

The catalogue is divided into two main chapters: OUTDOOR and INDOOR. For each main chapter there are sub chapters such as "Light lines". In every sub chapter suitable luminaires are initially presented as an overview. Then the lights are explained in more detail with technical information and mounting options. Small icons at the edge of the pages show features of the specific product. With it, different luminaires can be compared well and easily.



Main chapter  
Introduction  
Sub chapter title  
Chapter + explanation

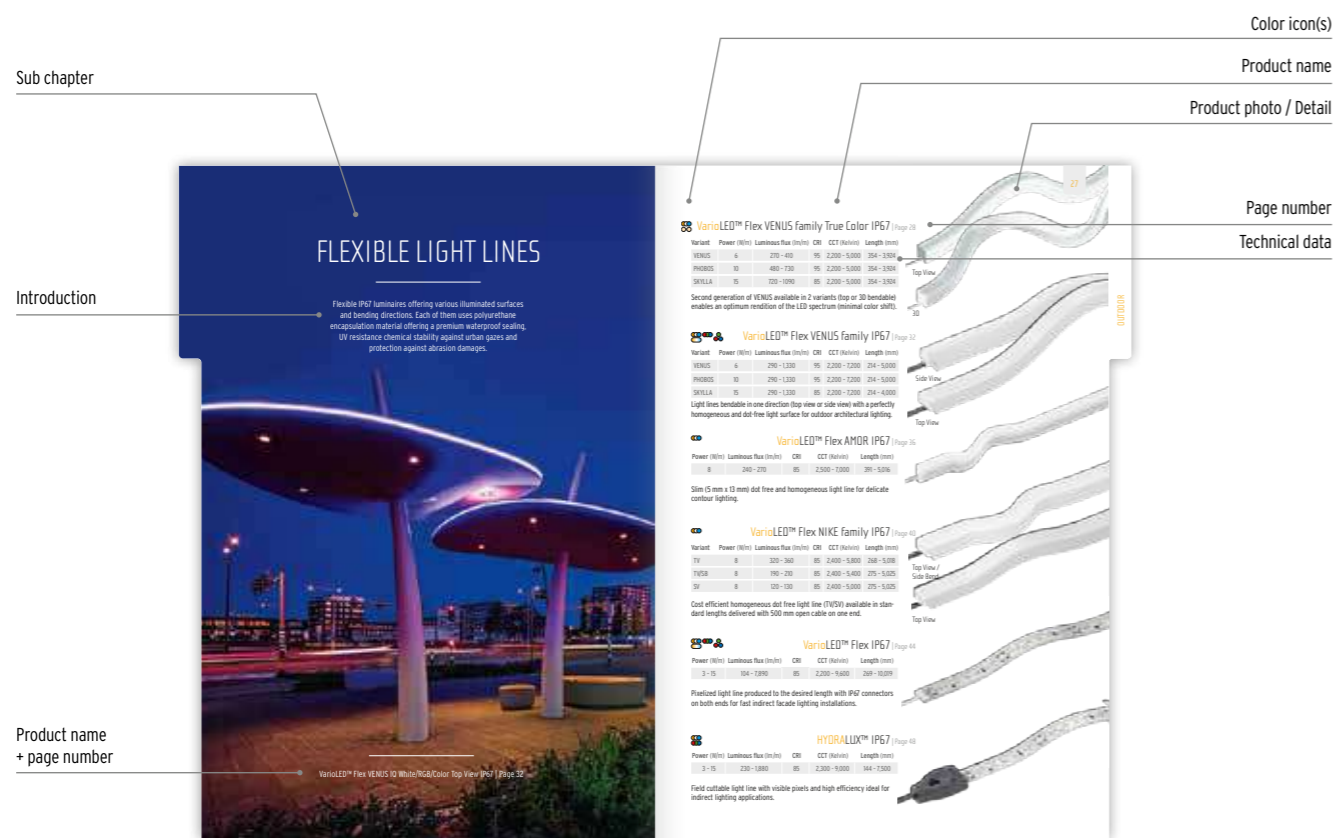

Color icon(s)  
Product name  
Product photo / Detail  
Page number  
Technical data

Sub chapter  
Introduction  
Product name + page number



Product name  
Introduction  
Application photo  
Product photo / Detail  
Feature icons  
3 Product highlights  
OR-Code to www.led-linear.com/...



Product name  
Product photo / Detail  
Technical icons  
Light distribution curves  
Technical data  
Mounting accessories  
Example of application

# OUTDOOR

Turn common landscapes, facades or outdoor areas to unique spaces.

## 26 FLEXIBLE LIGHT LINES

Bendable light lines providing a set of contour or indirect lighting luminaires embracing into organic shapes.

## 52 RIGID LIGHT LINES

Set of modular and robust light lines for non-curved application as a complement to the flexible assortment.

## 82 IN-GROUND

Rock solid in-ground luminaire suitable for pedestrian and drive-through areas.

## 88 GRAZER

Linear luminaires designed to highlight special architecture surfaces, textures, materials and structures (wall-grazing) delivering high power in a tight beam.

## 102 UNDER WATER

Linear luminaires for permanent submersion into pools and other water features designed to create a safe and pleasant atmosphere.

VarioLED™ OCEANOS White/IQ White/RGB IP67 | Page 76 and 90

# FLEXIBLE LIGHT LINES

Flexible IP67 luminaires offering various illuminated surfaces and bending directions. Each of them uses polyurethane encapsulation material offering a premium waterproof sealing, UV resistance, chemical stability against urban gazes and protection against abrasion damages.



VarioLED™ Flex VENUS IQ White/RGB/Color Top View IP67 | Page 32

## VarioLED™ Flex VENUS family True Color IP67 | Page 28

Variant	Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
VENUS	6	270 - 380	95	2,100 - 4,200	354 - 3,924
PHOBOS	10	480 - 680	95	2,100 - 4,200	354 - 3,924
SKYLLA	15	720 - 1,010	95	2,100 - 4,200	354 - 3,924

Second generation of VENUS available in 2 variants enables an optimum rendition of the LED spectrum (minimal color shift).



Top View

30

## VarioLED™ Flex VENUS family IP67 | Page 32

Variant	Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
VENUS	6	150 - 430	96	2,200 - 7,200	214 - 5,040
PHOBOS	10	250 - 710	96	2,200 - 7,200	214 - 5,040
SKYLLA	15	400 - 1,140	86	2,200 - 7,200	214 - 4,040

Light lines bendable in one direction (top view or side view) with a perfectly homogeneous and dot-free light surface for outdoor architectural lighting.



Side View

Top View

## VarioLED™ Flex AMOR IP67 | Page 36

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
10	180 - 190	90	3,100 - 4,800	391 - 5,016

Slim, dot free and homogeneous light line for delicate contour lighting.




Side View

## VarioLED™ Flex NIKE family IP67 | Page 40

Variant	Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
TV	5	270 - 290	90	3,300 - 4,900	268 - 5,018
TV/SB	5	240 - 250	90	3,300 - 4,900	275 - 5,025
SV	5	170 - 180	90	3,100 - 4,700	275 - 5,025

Cost efficient homogeneous dot free light line (TV/SV) available in standard lengths.

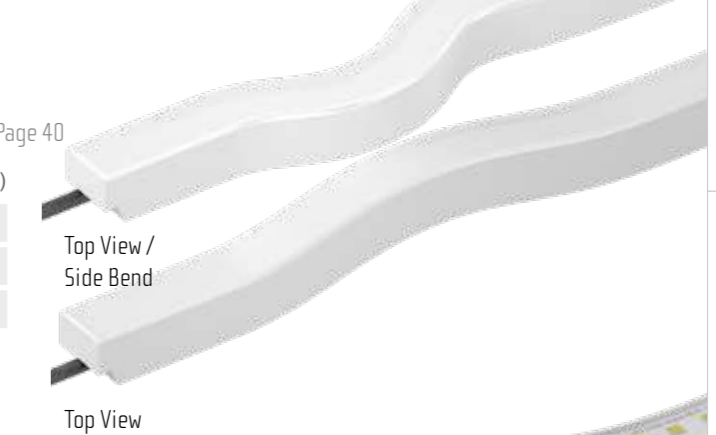

Top View / Side Bend

Top View

## VarioLED™ Flex IP67 | Page 44

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
3 - 15	200 - 1,630	up to 95	2,500 - 9,600	82 - 10,019

Pixelized light line produced to the desired length with IP67 connectors on both ends for fast indirect facade lighting installations.



## HYDRALUX™ IP67 | Page 48


Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
3 - 15	300 - 1,650	up to 96	2,500 - 9,600	4,000 - 10,000

Field cuttable light line with visible pixels and high efficiency ideal for indirect lighting applications.



# VARIOLED™ FLEX VENUS FAMILY TRUE COLOR IP67

After gathering inputs and ideas from our customers VENUS True Color now carries on all the features which made VENUS a worldwide success with new major benefits. The first variant Top View takes over the applications covered by its predecessor for 2D bends perpendicular to the luminous surface. The second variant provides a light line which can be twisted or bent in 3 dimensions in order to follow any curves present in modern architectural concepts.

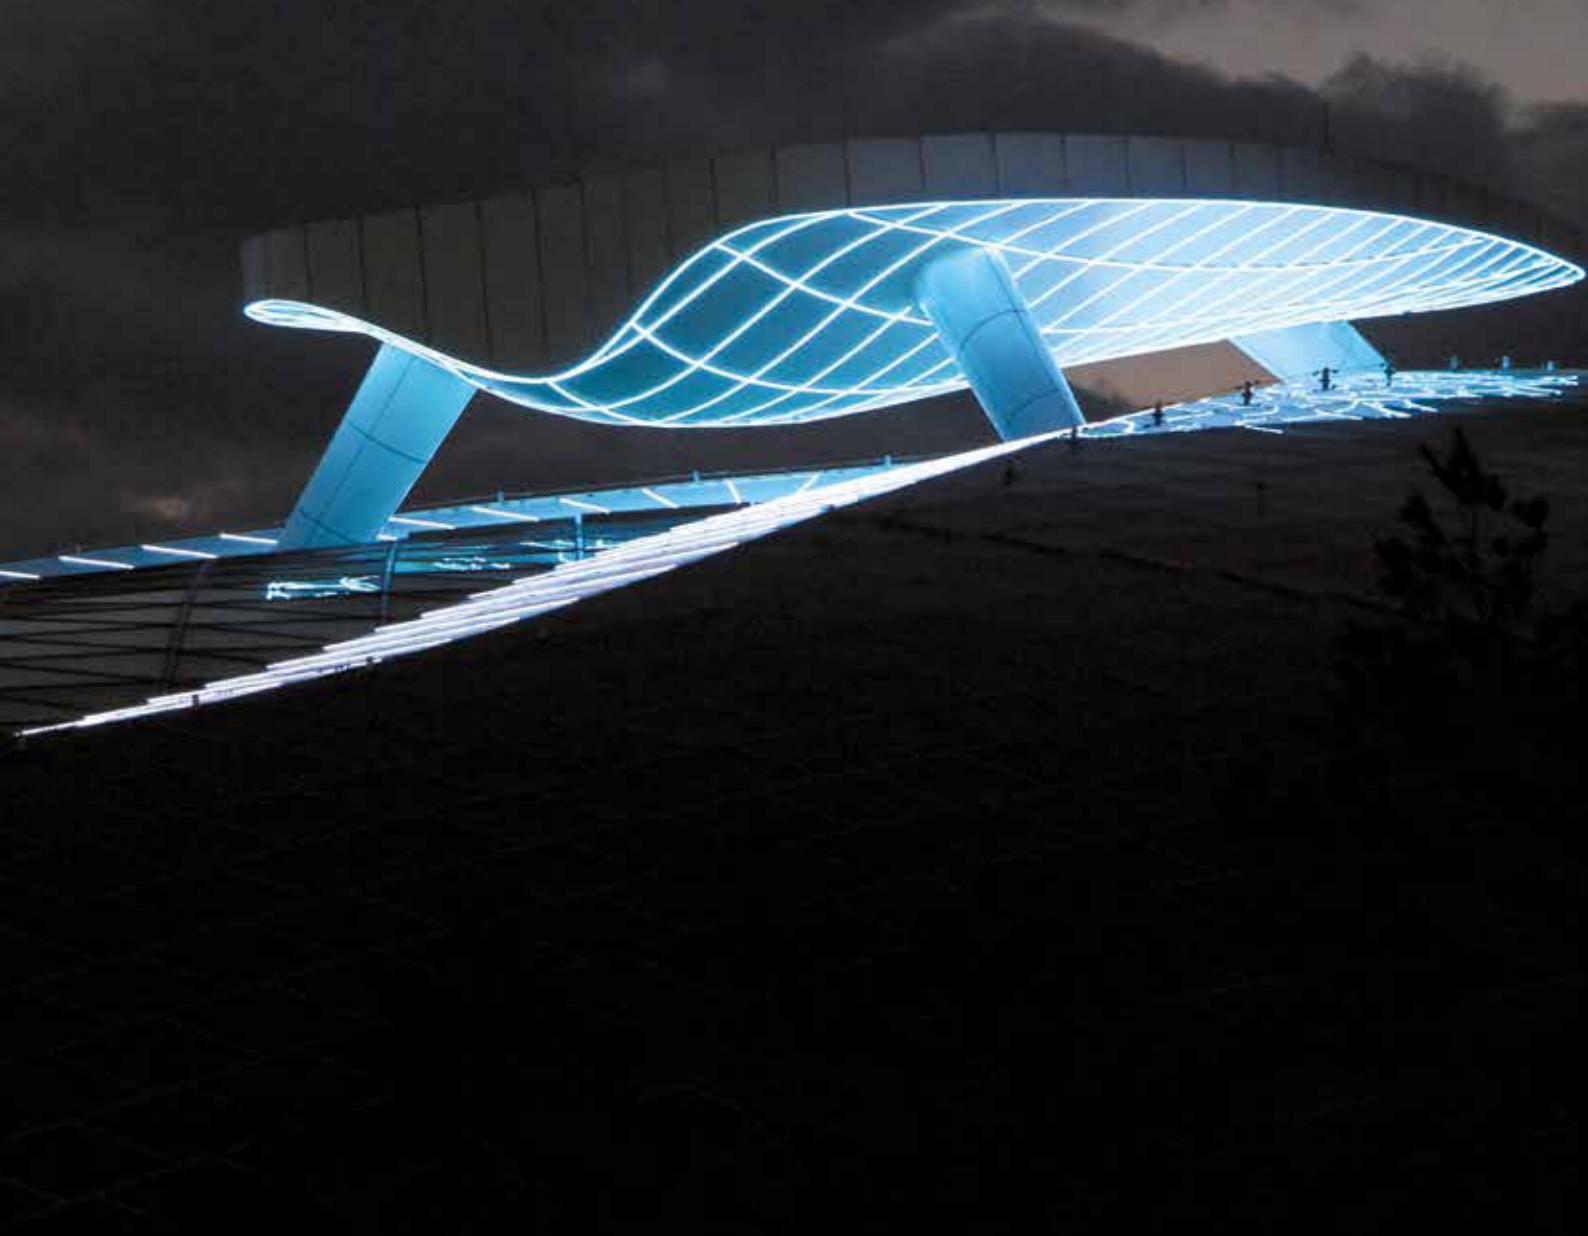


## VarioLED™ Flex VENUS family True Color IP67



Dot free encapsulated 3D bendable LED design light line



Available in 2D (Top View) and 3D bending directions allowing to follow almost any shape and conceive creative designs.



VENUS True Color Top View (TV) and 3D have the same cross section and comparable lumen output. It simplifies the specification process while enabling a consistent light line in intensity and size regardless of the geometry of the installation.



VENUS True Color features an improved fixture to fixture overlap without light gap. Thus, it is the ideal solution for endless homogeneous curved light lines.



[www.led-linear.com/venustc](http://www.led-linear.com/venustc)



LED Linear™ GmbH


# VarioLED™ Flex VENUS family True Color IP67

## Technical Specifications

- White
- L80/B10 > 60,000 h
- IP67
- R<sub>max</sub> = 15 cm
- R<sub>max</sub> = 15 cm



Cross section	18 mm x 17 mm
Length	3D: 494 mm - 1,964 mm / TV: 354 mm - 3,924 mm
Power	6 W/m - 15 W/m
Luminous flux	270 lm/m - 1,010 lm/m
Efficacy	up to 68 lm/W
Beam angle/optics	120°
Color temperatures	2,100 K, 2,500 K, 2,700 K, 3,000 K, 3,400 K and 4,200 K
CRI	up to 95



## Mounting All dimensions in mm.

Mounting	Mounting accessories	Description	Example of application
<b>1. Surface-mounted, Clips and profile without mounting channel</b> 	VTC Surface Mounting Clip Low Art.-#: 13000277 VTC Surface Mounting Channel Low Art.-#: 10000552 (2 m) 10000552-4m (4 m)	Robust aluminum extrusion painted in white available as profile or clips for surface mount.	
<b>2. Surface-mounted, Clips and profile with mounting channel</b> 	VTC Surface Mounting Clip High Art.-#: 13000278 VTC Surface Mounting Channel High Art.-#: 10000553 (2 m) 10000553-4m (4 m)	Robust aluminum extrusion painted in white available as profile or clips for surface mount.	
<b>3. Surface-mounted, vertical / horizontal</b> 	VTC Surface Holding Clamp Clear Art.-#: 13000279	PVC casting clamp for surface mount.	
<b>4. Recessed</b> 	VTC Recessed Profile (2 m Set) (With 3 x Mounting Spring & Flexible Snap on Cover Strips) Art.-#: 10000559 (2 m) 10000559-4m (4 m) VTC End Cap Recessed (Set of 2) Art.-#: 11000214	Profile or clips with mounting springs can be installed directly into false ceiling.	
<b>5. Pendant</b> 	VTC Pendant Set for Flexible Pendant Profile (2 m Wire) Art.-#: 13000273 VTC Flexible Pendant Channel Art.-#: 10000554 VTC Pendant Set for Flexible Pendant Profile (5 m Wire) Art.-#: 13000274 VarioCANOPY Square Mounting set (optional) for pendant ceiling installations on concrete ceilings Art.-#: 16000347	Pendant set with profil for installation directly on the ceiling. 2 m or 5 m suspension is cuttable on-site.	

If the luminaire shall be installed without our mounting accessories, please get in touch with us to check the compatibility of the mounting.




# VARIOLED™ FLEX VENUS IP67 FAMILY

First linear flexible LED luminaire for outdoor architectural lighting with a perfectly homogeneous and dot-free light surface. The innovation brought by this 2 dimensions bendable light lines opened new doors in lighting design which were unreachable by any luminaires back then.




Photo: Frédérique Félix-Faure, François Moura, Guillaume Ombreux

## VarioLED™ Flex VENUS IP67 family

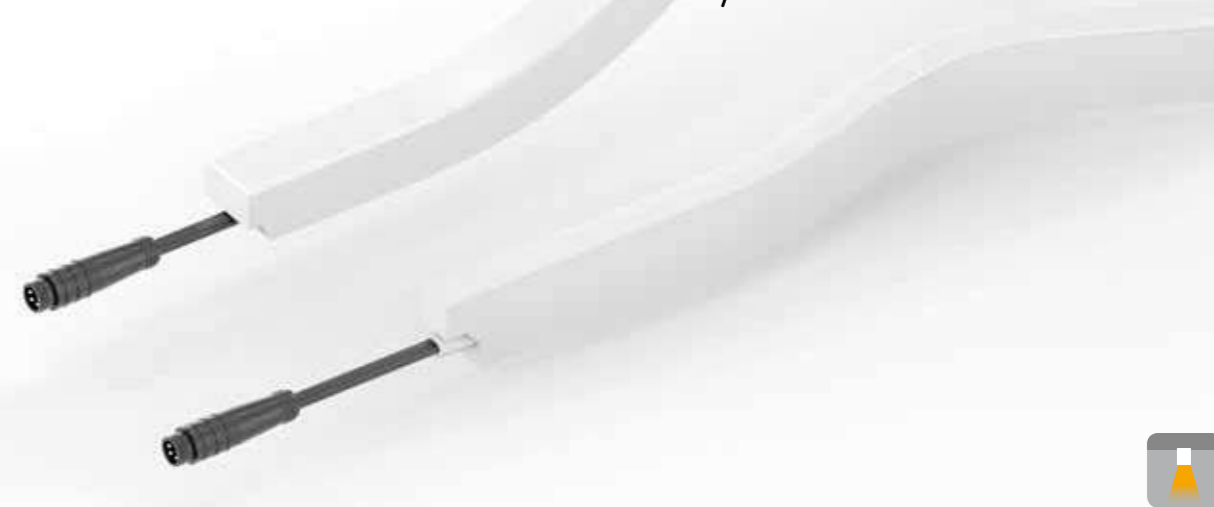

Flexible, dot-free design light line for appealing lighting accents



VENUS is a polyurethane encapsulated luminaire resistance and chemical stability against urban gases.



With an efficiency up to 95 lm/W, VENUS stands out as one of the most efficient light line available to date.



The various lumen output and a large panel of available CCTs turns VENUS into a modular lighting design tool-kit.



[www.led-linear.com/venus](http://www.led-linear.com/venus)

LED Linear™ GmbH


# VarioLED™ Flex VENUS IP67 family

## Technical Specifications


- White
- IQ White
- RGB
- White / IQ White  
L80/B10 > 60,000 h
- RGB  
L80 > 30,000 h
- IP67
- R<sub>max</sub> = 15 cm
- R<sub>max</sub> = 15 cm



Top View (TV)



Side View (SV)



15 mm


20.5 mm

Scale: 1:1

Cross section	TV: 15.0 mm x 16.0 mm / SV: 20.5 mm x 10.0 mm
Length	TV: 214 mm - 5,026 mm / SV: 228 mm - 5,040 mm
Power	6 W/m - 15 W/m
Luminous flux	up to 1,140 lm/m
Efficacy	up to 76 lm/W
Beam angle/optics	120°
Color temperatures	TV: 2,400 K, 2,700 K, 3,000 K, 3,500 K, 3,900 K, 4,600 K, 5,500 K and 7,200 K SV: 2,200 K, 2,500 K, 2,700 K, 3,300 K, 3,700 K, 4,200 K, 4,900 K and 6,800 K
Color	Tunable White (TV 2,500 K - 4,400 K / SV 2,400 K - 4,000 K), RGB
CRI	85 - 96

## Mounting All dimensions in mm.

### 1. Surface-mounted, Clips and profile without mounting channel



#### Mounting accessories

**Top View**  
VarioContour TV 2,000 mm or 4,000 mm channel (anodized aluminum)  
Art.-#: 10000049-01  
10000049-01-4m

VarioClip TV 50 mm (5 clips required/meter, anodized aluminum)  
Art.-#: 13000010-01

**Side View**  
VarioContour SV 2,000 mm or 4,000 mm channel (anodized aluminum)  
Art.-#: 10000048-01  
10000048-01-4m

VarioClip SV 50 mm (5 clips required/meter, anodized aluminum)  
Art.-#: 13000011-01

#### Description

**Top View**  
Continuous anodized aluminum surface mounting profile designed to fit Venus TV product.

Aluminum surface mounting bracket. Recommended for overhead mounting 5 brackets per meter (3 brackets for other mountings).


**Side View**  
Continuous anodized aluminum surface mounting profile designed to fit Venus SV product.

Aluminum surface mounting bracket. Recommended for overhead mounting 5 brackets per meter (3 brackets for other mountings).

#### Example of application



### 2. Surface-mounted, Clips and profile with mounting channel



#### Mounting accessories

**Top View**  
VarioContour TV CC 2,000 mm or 4,000 mm (anodized aluminum) inclusive cable raceway  
Art.-#: 10000339  
10000339-4m

**Side View**  
VarioContour SV CC 2,000 mm or 4,000 mm (anodized aluminum) inclusive cable raceway  
Art.-#: 10000520  
10000520-4m


#### Description

**Top View**  
Continuous aluminum surface mounting profile. Cable Runway allows the cables to run underneath the fixture.

**Side View**  
Continuous aluminum surface mounting profile. Cable Runway allows the cables to run underneath the fixture.

#### Example of application

### 3. Surface-mounted, SST Clips



#### Mounting accessories


**Top View**  
VarioClip TV 30 mm 316L (5 clips required/meter, stainless steel - V4A) water features  
Art.-#: 13000050-01

**Side View**  
VarioClip SV 30 mm 316L (5 clips required/meter, stainless steel - V4A) water features  
Art.-#: 13000051-01


#### Description

**Top View**  
Special grade stainless steel surface mounting clip for harsh environments. Recommended to use for overhead mounting 5 brackets per meter (3 brackets for other mountings).

**Side View**  
Special grade stainless steel surface mounting clip for harsh environments. Recommended to use for overhead mounting 5 brackets per meter (3 brackets for other mountings).

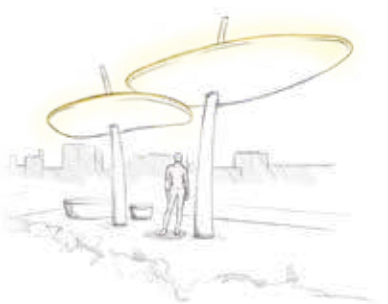

### 4. Surface-mounted, Clips



#### Mounting accessories

**Top View**  
VarioClip TV 30 mm 301 (stainless steel - V2A)  
Art.-#: 13000033-01

**Side View**  
VarioClip SV 30 mm 301 (stainless steel - V2A)  
Art.-#: 13000038

#### Description

**Top View**  
Stainless steel clips for surface mount application.

**Side View**  
Stainless steel clips for surface mount application.

**If the luminaire shall be installed without our mounting accessories, please get in touch with us to check the compatibility of the mounting.**

# VARIOLED™ FLEX AMOR IP67

AMOR is designed as a super slim luminaire to be used when space is limited but light is needed. It is the perfect product when creating eye-catching lines of light.


## VarioLED™ Flex AMOR IP67



Narrowest, flexible LED light line sets new standards in decorative lighting



Cross section of 5 mm x 13 mm, making it the most minimalistic product, which enables slim lines of light.



Unmatched flexibility with a minimum bending radius of 3 cm.



Dot free homogeneous light emission despite small footprints when recessed.



[www.led-linear.com/amor](http://www.led-linear.com/amor)

LED Linear™ GmbH


# VarioLED™ Flex AMOR | P67

## Technical Specifications

- White
- L80/B10 > 60,000 h
- IP67
- R<sub>max</sub> = 15 cm




Cross section	5 mm x 13 mm
Length	391 mm - 5,016 mm
Power	10 W/m
Luminous flux	up to 190 lm/m
Efficacy	20 lm/W
Beam angle/optics	120°
Color temperatures	2,900 K, 3,200 K, 3,800 K and 4,300 K
CRI	up to 90



## Mounting All dimensions in mm.

### 1. Recessed, Mounting channel




### Mounting accessories

-  AMOR SV Flexible Mounting Profile, 980 mm  
Art.-#: 10000527
-  Dummy AMOR SV for Plastering, 5 m  
Art.-#: 10000528-SCH-5m


### Description

Flexible mounting profile for plaster in mounting.


### Example of application

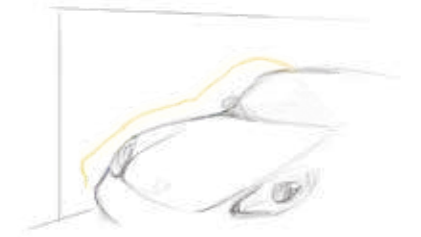

### 2. Surface-mounted, Clips



### Mounting accessories

-  VarioClip AMOR (Set of 10, incl. Screws)  
Art.-#: 13000237

### Description

Anodized aluminum clips for surface mount application.

### Example of application



**If the luminaire shall be installed without our mounting accessories, please get in touch with us to check the compatibility of the mounting.**

# VARIOLED™ FLEX NIKE FAMILY IP67

Cost efficient IP67 flexible homogeneous and dot free linear light line with a 16 mm x 15 mm cross section and opal encapsulation for indoor and outdoor organic facade accent lighting requiring a high level of environmental resistance.

Photo: Jan van Lierde

Attention! According to the new EU ECODESIGN guidelines, some variants of this product may no longer be sold in the EU as of 1<sup>st</sup> September 2021, but remain available for sale outside the EU. Please get in touch with our sales team for further information.

Replacement product: VarioLED™ Flex VENUS Air IP67

## VarioLED™ Flex NIKE family IP67




### Cost effective flexible light line



Vertical bending with radius of 150 mm.



Delivered in standard lengths with 500 mm open-end cable on one-side.



Resistant to UV, urban gases and abrasion.






[www.led-linear.com/nike](http://www.led-linear.com/nike)

LED Linear™ GmbH

# VarioLED™ Flex NIKE family IP67

## Technical Specifications


- White
- IP67
- L80/B10 > 60,000 h
- R<sub>max</sub> = 15 cm
- R<sub>max</sub> = 15 cm

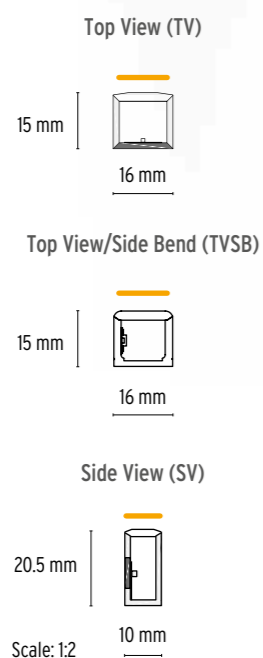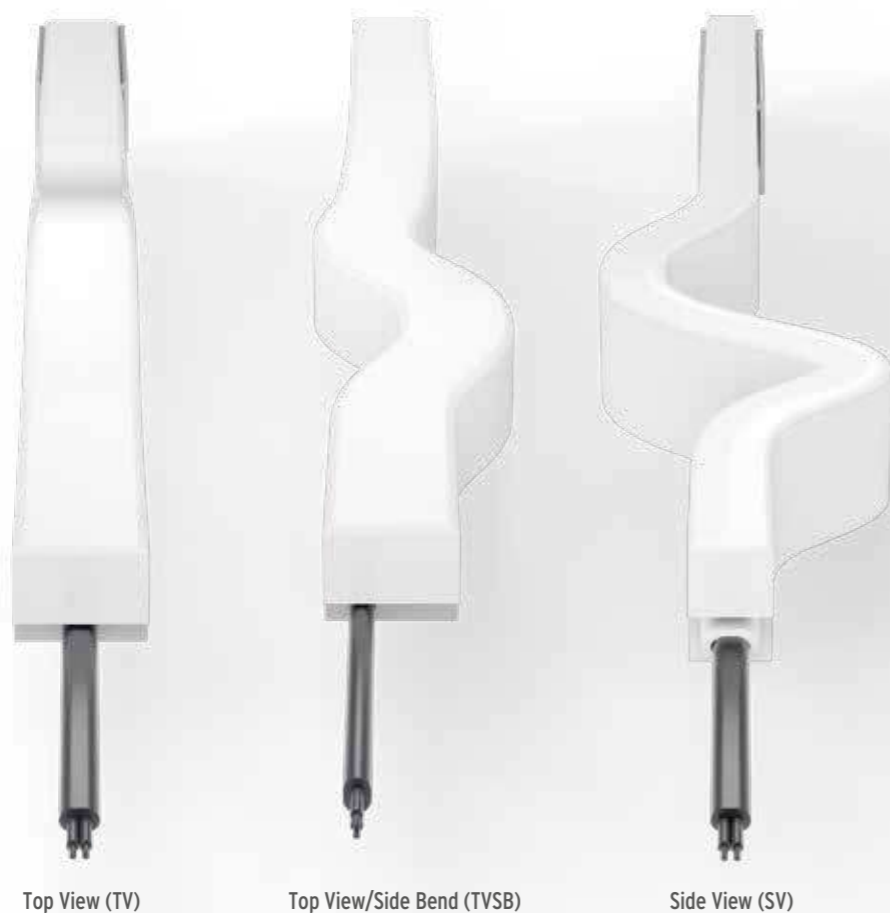

Cross section	TV/TVSB: 15.0 mm x 16.0 mm / SV: 20.5 mm x 10.0 mm
Length	TV: 268 mm, 518 mm, 1,018 mm, 2,018 mm, 5,018 mm SV/TVSB: 275 mm, 525 mm, 1,025 mm, 2,025 mm, 5,025 mm
Power	5 W/m
Luminous flux	170 - 290
Efficacy	up to 58 lm/W
Beam angle/optics	120°
Color temperatures	TV: 3,300 K, 3,700 K, 4,300 K and 4,900 K TVSB: 3,300 K, 3,700 K, 4,300 K and 4,900 K SV: 3,100 K, 3,500 K, 4,100 K and 4,700 K
CRI	90

## Mounting All dimensions in mm.

### 1. Surface-mounted, Clips and profile without mounting channel




#### Mounting accessories

- Top View**  
VarioContour TV 2,000 mm or 4,000 mm channel (anodized aluminum)  
Art.-#: 10000049-01  
10000049-01-4m
- VarioClip TV 50 mm**  
(5 clips required/meter, anodized aluminum)  
Art.-#: 13000010-01
- Side View**  
VarioContour SV 2,000 mm or 4,000 mm channel (anodized aluminum)  
Art.-#: 10000048-01  
10000048-01-4m
- VarioClip SV 50 mm**  
(5 clips required/meter, anodized aluminum)  
Art.-#: 13000011-01


#### Description

- Top View**  
Continuous anodized aluminum surface mounting profile designed to fit Venus TV product.
- Aluminum surface mounting bracket.**  
Recommended for overhead mounting  
5 brackets per meter (3 brackets for other mountings).
- Side View**  
Continuous anodized aluminum surface mounting profile designed to fit Venus SV product.
- Aluminum surface mounting bracket.**  
Recommended for overhead mounting  
5 brackets per meter (3 brackets for other mountings).

#### Example of application



### 2. Surface-mounted, Clips and profile with mounting channel



#### Mounting accessories


- Top View**  
VarioContour TV CC 2,000 mm or 4,000 mm (anodized aluminum) inclusive cable raceway  
Art.-#: 10000339  
10000339-4m
- Side View**  
VarioContour SV CC 2,000 mm or 4,000 mm (anodized aluminum) inclusive cable raceway  
Art.-#: 10000520  
10000520-4m

#### Description

- Top View**  
Continuous aluminum surface mounting profile. Cable Runway allows the cables to run underneath the fixture.
- Side View**  
Continuous aluminum surface mounting profile. Cable Runway allows the cables to run underneath the fixture.

#### Example of application

### 3. Surface-mounted, SST Clips




#### Mounting accessories


- Top View**  
VarioClip TV 30 mm 316L (5 clips required/meter, stainless steel - V4A) water features  
Art.-#: 13000050-01
- Side View**  
VarioClip SV 30 mm 316L (5 clips required/meter, stainless steel - V4A) water features  
Art.-#: 13000051-01

#### Description

- Top View**  
Special grade stainless steel surface mounting clip for harsh environments. Recommended to use for overhead mounting 5 brackets per meter (3 brackets for other mountings).
- Side View**  
Special grade stainless steel surface mounting clip for harsh environments. Recommended to use for overhead mounting 5 brackets per meter (3 brackets for other mountings).

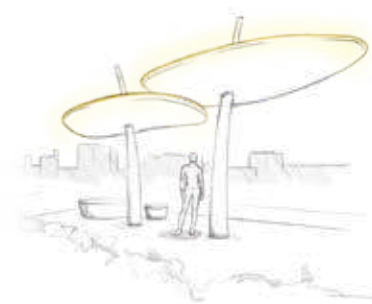

### 4. Surface-mounted, SST Clips



#### Mounting accessories

- Top View**  
VarioClip TV 30 mm 301 (stainless steel - V2A)  
Art.-#: 13000033-01
- Side View**  
VarioClip SV 30 mm 301 (stainless steel - V2A)  
Art.-#: 13000038

#### Description

- Top View**  
Stainless steel clips for surface mount application.
- Side View**  
Stainless steel clips for surface mount application.

If the luminaire shall be installed without our mounting accessories, please get in touch with us to check the compatibility of the mounting.

# VARIOLED™ FLEX IP67

VarioLED™ Flex IP67 are flexible, linear LED light lines produced in customer specified individual lengths. Depending on the step measurement they are freely scalable and available in lengths of up to 10 m (with large pitch). For applications such as coves, contours, furniture, counters, stairways, etc.

## VarioLED™ Flex IP67



### High protection and amazing flexibility



High efficiency with up to 117 Lumen/Watt.



IP67 protection against water, salt water and UV radiation through a clear polyurethane encapsulation.




The lamps are delivered ready to plug in with IP67 mini connectors at both ends and can be easily installed with adhesive tape or plastic clips.




# VarioLED™ Flex IP67

## Technical Specifications

- White
- IQ White
- RGB
- L80/B10 > 60,000 h White / IQ White
- L80 > 30,000 h RGB
- IP67

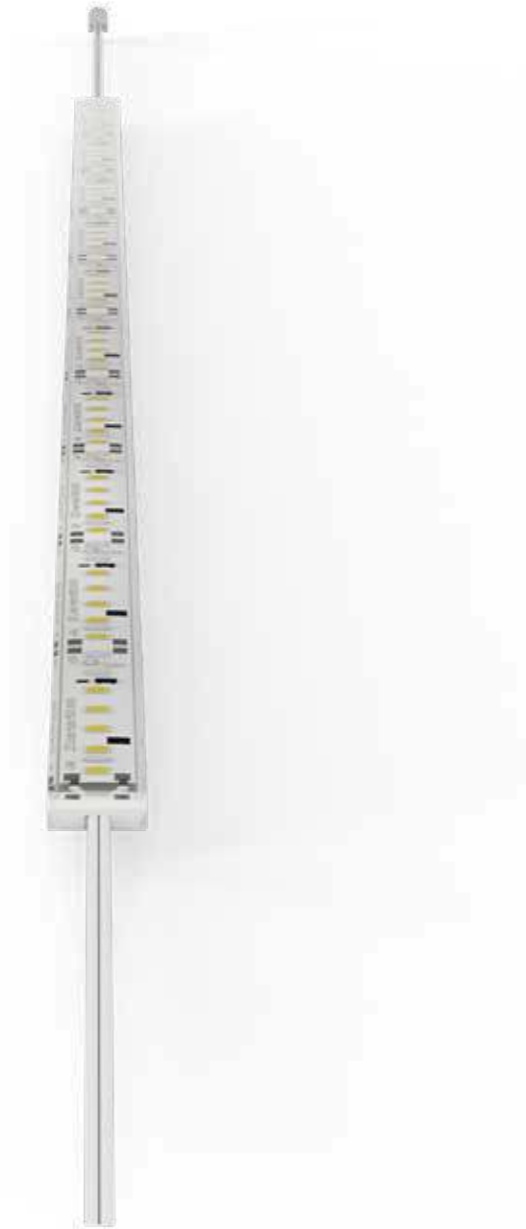


Cross section	12 mm x 4 mm
Length	82 mm - 10,019 mm
Power	3 W/m - 15 W/m
Luminous flux	200 lm/m - 1,630 lm/m
Efficacy	up to 117 lm/W
Beam angle/optics	60°, 160°
Color temperatures	2,500 K, 2,900 K, 3,300 K, 3,800 K, 4,300 K, 5,100 K, 6,100 K and 9,600 K
Colors	Tunable White, RGB
CRI	86 - 96



### Mounting All dimensions in mm.

#### 1. Surface-mounted, Clips



#### Mounting accessories




#### Description

Clear plastic mounting clips. Use to mount the product on hard surfaces. Sold as set of 50 pieces.

#### Example of application



#### 2. Surface-mounted, Tape



#### Mounting accessories



#### Description

Double sided 3M adhesive tape roll. Use to mount products on surfaces.

#### Example of application



**If the luminaire shall be installed without our mounting accessories, please get in touch with us to check the compatibility of the mounting.**



# HYDRALUX™ IP67

IP67 protected field cuttable luminaire with simple assembly that can be easily and individually adapted to any application.




Photo: Photowalas

## HYDRALUX™ IP67



The new standard of light




Cut on site to the desired length.



Quick installation using IP67 connector assembly assembled by adhesive bonding or with clips against external influences (IP67 protection).



A white base profile with lateral fins and reflective surface ensures high lumen currents of up to 1,650 lm/m.



[www.led-linear.com/hydralux](http://www.led-linear.com/hydralux)

LED Linear™ GmbH


# HYDRALUX™ IP67

## Technical Specifications

- White
- RGB
- White / IQ White  
L80/B10 > 60,000 h
- RGB  
L80 > 30,000 h
- IP67




Cross section	12.5 mm x 3.5 mm
Length	4 m - 10 m
Power	3 W/m - 15 W/m
Luminous flux	up to 1,650 lm/m
Efficacy	up to 117 lm/W
Beam angle/optics	120°
Color temperatures	2,500 K, 2,900 K, 3,300 K, 3,800 K, 4,300 K, 5,100 K, 6,100 K and 9,600 K
Colors	RGB
CRI	86 - 96




### Mounting All dimensions in mm.

#### 1. Surface-mounted, Clips



#### Mounting accessories




#### Description

Clear plastic mounting clips. Use to mount the product on hard surfaces. Sold as set of 50 pieces.

#### Example of application



#### 2. Surface-mounted, Tape



#### Mounting accessories



#### Description

Double sided 3M adhesive tape roll. Use to mount products on surfaces.

#### Example of application



# RIGID LIGHT LINES

Assortment of rigid IP67 luminaires complementing the flexible line-up for straight lines application on facade, landscapes as well as ambient lighting. Each luminaire consists an extruded aluminum housing in combination with polyurethane encapsulation material offering an optimal waterproof sealing, UV resistance chemical stability against urban and protection against abrasion damages.

VarioLED™ Flex VENUS-Familie White Top View IP67 | Seite 32



## ADONIS IP67 | Page 54

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
6 - 36	240 - 2,620	85 - 96	1,900 - 4,500	639 - 1,827

Compact and robust dot free luminaire that is a rigid equivalent to VENUS with cable groove on its backside. It fascinates with a simple installation with internal mounting clips for recessed or surface-mount without visible light joints and connections.



## X00LINE™ IP67 | Page 58

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
5 - 25	290 - 2,620	85 - 96	2,500 - 9,600	380 - 3,014

Modular luminaire with 9 different optics available and side cabling and a large panel of mounting options.



## X00LUM™ IP67 | Page 62

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
6 - 25	250 - 1,870	86 - 96	2,400 - 7,200	198 - 4,010

Luminaire with 45° adjustable head with an opal encapsulation for decent accent lighting.



## X00LUM™ Reflector IP67 | Page 66

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
6 - 25	340 - 3,090	85 - 96	2,500 - 9,600	198 - 4,010

Luminaire with 45° adjustable head with a clear encapsulation and reflectors for general lighting applications.



## X00LUM™ Reflector Wall Wash IP67 | Page 70

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
5 - 25	340 - 3,090	85 - 96	2,500 - 9,600	198 - 4,010

Compact luminaire with a clear encapsulation and reflectors for wall washing in outdoor areas.



## X00LIGHT™ IP67 | Page 74

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
6 - 25	240 - 1,770	85 - 96	2,400 - 7,200	84 - 4,021

Sleek design luminaire for general lighting manufactured to length. Available as pendant, surface and recessed.



## VarioLED™ IP67 | Page 78

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
3 - 25	200 - 2,600	85 - 96	2,500 - 9,600	82 - 4,019

Pixelized light line produced to the desired length with IP67 connectors on both ends for fast indirect facade lighting installations. Suitable with 10 different optics.



# ADONIS IP67

ADONIS is a minimalistic linear luminaire suitable for facade or ceiling direct view applications. A possible output of 2,620 lm/m combined with CCTs ranging between 1,900 K to 4,500 K makes ADONIS a multifunctional luminaire.



## ADONIS IP67



Convinces with light intensity and homogeneous light output



High protection against vandalism thanks to a robust, powder-coated aluminum profile with an IK10 rating.



Polyurethane is utilized in ADONIS to make it more resistant to impact from salt water UV-light and solvents.



The translucent end caps combined with smart cabling and mounting management operated on the back groove the profile enables infinite light lines without dark or hot spots.



[www.led-linear.com/adonis](http://www.led-linear.com/adonis)

LED Linear™ GmbH


# ADONIS IP67

## Technical Specifications

- White
- IQ White
- RGB
- L80/B10 > 60,000 h
- L80 > 30,000 h
- IP67
- IK10




Cross section	20.5 mm x 25.5 mm
Length	639 mm, 952 mm, 1,264 mm, 1,514 mm, 1,827 mm
Power	6 W/m - 36 W/m
Luminous flux	up to 2,620 lm/m
Efficacy	up to 73 lm/W
Beam angle/optics	120°
Color temperatures	1,900 K, 2,100 K, 2,300 K, 2,500 K, 2,800 K, 3,200 K, 3,700 K and 4,500 K
Colors	Tunable White (2,100 K - 4,500 K), RGB
CRI	up to 96




### Mounting All dimensions in mm.


#### 1. Surface Mounting fixed horizontal




**Description**  
Aluminum mounting clip with washer. Clips inside the fixture profile for invisible mounting. Recommended to use every 60 cm.

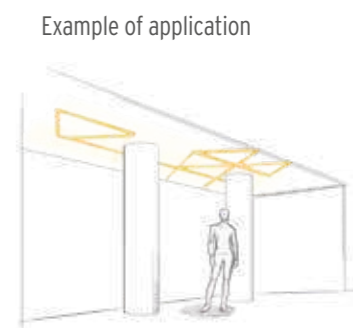


#### 2. Surface Mounting fixed vertical




**Description**  
Metal mounting block with set screw for vertical applications. Install inside the fixture profile to stop the fixture from sliding. Recommended to use one mounting lock per fixture and clips every 60 cm.

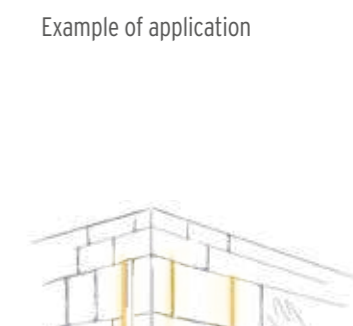


#### 3. Surface Mounting adjustable




**Description**  
140 mm adjustable mounting clip with a tilt of 60° to each side. Recommended to use every 60 cm.

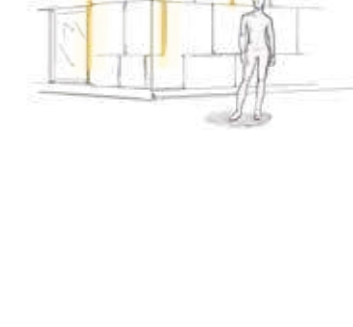

#### 4. Wall Mounted adjustable



**Description**  
Metal surface mounting adjustable wall arm. The set includes mounting block, mounting clip and adjusting screws. Tilts 140° in each direction and screw locks in position. Recommended to use for every 90 cm. Silver finish.

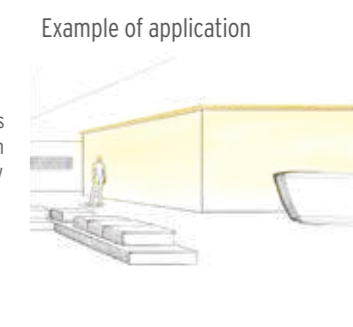

# XOOLINE™ IP67

XOOLINE™ is a minimalistic modular luminaire suitable for a multitude of other applications. A variety of light engines ranging from static white to RGB, with color temperatures from 2,500 K to 9,600 K, 8 optics to choose from, 8 different mounting accessories plus further options make XOOLINE™ an extremely versatile lighting tool.

## XOOLINE™ IP67 NEW



### Minimal luminaire with maximum versatility



Translucent end caps and special cable exit solutions make it easy to create infinite lines of light.



Housing and mounting profile are also available in black for directly visible applications.



Minimalistic form factor and several cable exit and connector options enable seamless integration.



[www.led-linear.com/xooline](http://www.led-linear.com/xooline)





LED Linear™ GmbH

# XOOLINE™ IP67

## Technical Specifications

NEW

- White
- IO White
- RGB
- L80/B10 > 60,000 h
- L80 > 30,000 h
- IP67

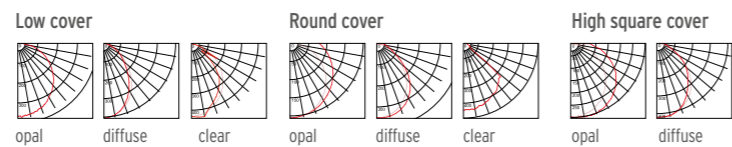


Length	up to 3,014 mm
Power	5 W/m - 25 W/m
Luminous flux	290 lm/m - 2,620 lm/m
Efficacy	107 lm/W
Beam angle/optics	Opal, Diffuse, Clear
Color temperatures	2,500 K, 2,900 K, 3,300 K, 3,800 K, 4,300 K, 5,100 K, 6,100 K and 9,600 K
Colors	Tunable White (2,400 K - 4,300 K), RGB
CRI	up to 96

Scale: 1:2

## Mounting

All dimensions in mm.

### 1. Surface-mounted\*, horizontal



\* Low cover


### Mounting accessories

- Full length mounting channel  
Digits in order code: MP
- 0° aluminum mounting clip in 90 mm length  
Digits in order code: CL0
- 15° aluminum mounting clip in 90 mm length  
Digits in order code: CL15
- 30° aluminum mounting clip in 90 mm length  
Digits in order code: CL30
- 45° aluminum mounting clip in 90 mm length  
Digits in order code: CL45


### Description

Aluminum surface mounting bracket, recommended to use every 50 cm. Available in four different angles.

### Example of application

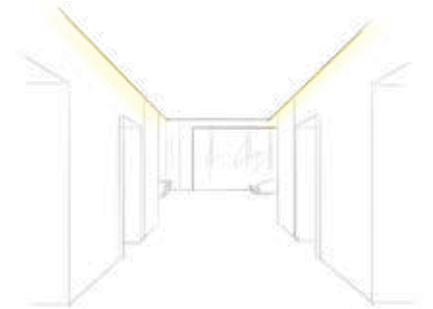

### 2. Surface-mounted, vertical



### Mounting accessories

- Plastic Mounting Bracket  
Digits in order code: PCL


### Description

White plastic surface mounting clip. Recommended to use every 50 cm. Cannot be used together with the aluminum mounting profile.

### Example of application



### 3. Adjustable, vertical\*



### Mounting accessories

- Adjustable Bracket  
Digits in order code: AMC

### Description


Use to adjust and fix the angle of fixture. 180 degrees adjusting range. Delivered with axis screw.

### Example of application



\* Mounting option AMC is not available for Tunable White Luminaires in combination with an 'LD' light engine. Cable feed options BS and FS can't be combined with mounting option AMC.

### 4. Wall-mounted



### Mounting accessories

- No additional accessories are required for this mounting option.  
Digits in order code: WMP

### Description


Full length mounting channel, sets light axis parallel to wall. Connectors fit into gap between luminaire and wall.

# XOOLUM™ IP67

XOOLUM™ is an exceptionally efficient design lamp, which offers enormous modularity and user-friendliness. Through the external converter, the light line retains its sleek shape.

Photo: Stadtwerke Schwerin / Maxpress


## XOOLUM™ IP67

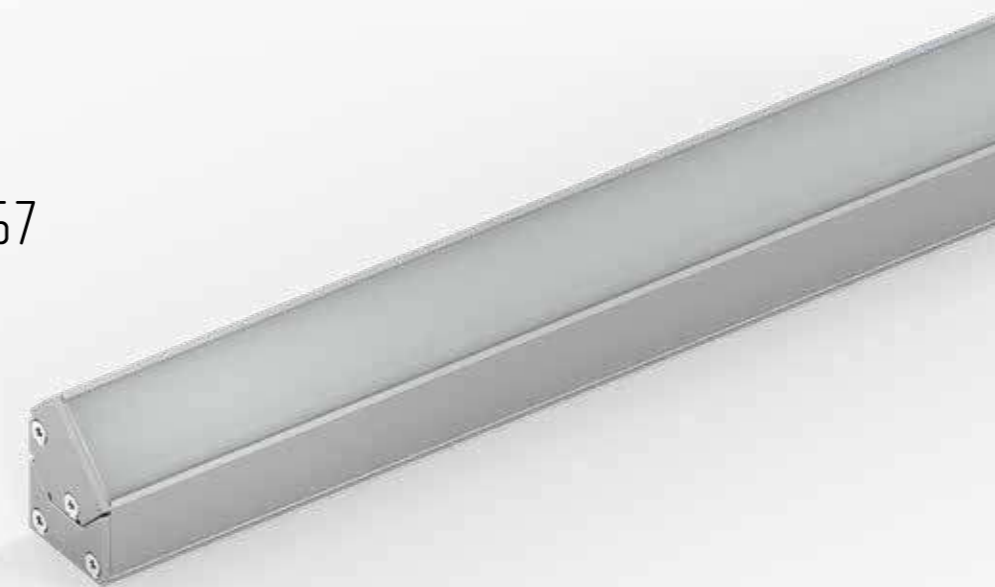

The smallest and brightest lighting solutions for general illumination



High Lumen output up to 1,870 lm/m and efficiency of 77 lm/W in combination with minimalistic design (25.4 mm x 31 mm) makes XOOLUM™ an efficient product.



Polyurethane is utilized in XOOLUM™ to make it more resistant to impact from salt water UV-light and solvents.



XOOLUM™ is a two in one fixture thanks to the possibility to mount it with an 45° angle. It can be surface mounted or as pendant fixture.



[www.led-linear.com/xoolum](http://www.led-linear.com/xoolum)

LED Linear™ GmbH





# XOOLUM™ IP67

## Technical Specifications




- White
- IQ White
- RGB
- L80/B10 > 60,000 h White / IQ White
- L80 > 30,000 h RGB
- IP67
- IK10

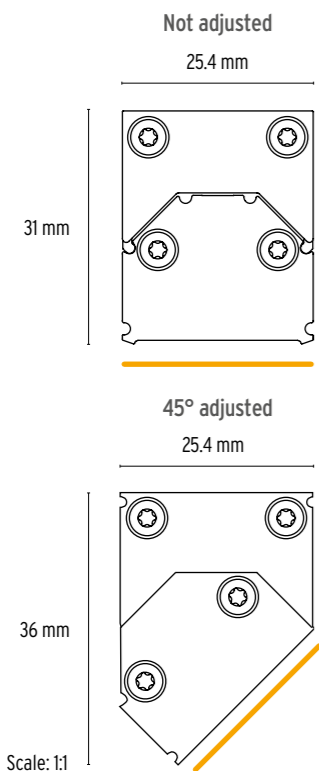

Cross section	25.4 mm x 31 mm / 25.4 mm x 36 mm
Length	198 mm - 4,010 mm
Power	6 W/m - 25 W/m
Luminous flux	250 lm/m - 1,870 lm/m
Efficacy	77 lm/W
Beam angle/optics	Opal encapsulation
Color temperatures	2,400 K, 2700 K, 3,000 K, 3,500 K, 3,900 K, 4,600 K, 5,500 K and 7,200 K
Colors	Tunable White (2,700 K - 5,500 K), RGB
CRI	86 - 96

## Mounting All dimensions in mm.

### 1. Pendant

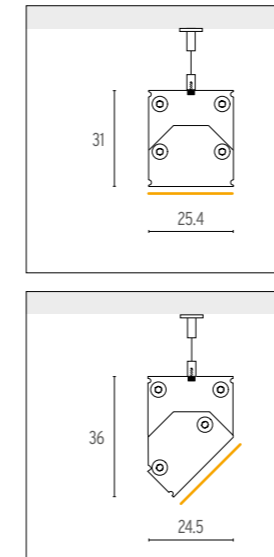

### Mounting accessories

- VarioPendant 007 Slide Silver Art.-#: 13000157
- VarioPendant 007 Slide Black Art.-#: 13000158
- VarioCANOPY Square Mounting set (optional) for pendant ceiling installations on concrete ceilings Art.-#: 16000347


### Description

Pendant set with screws for installations directly on the ceiling. 2 m Suspension is cuttable on site. Recommended to use two suspensions per meter.

### Example of application



### 2. Surface-mounted, fixed

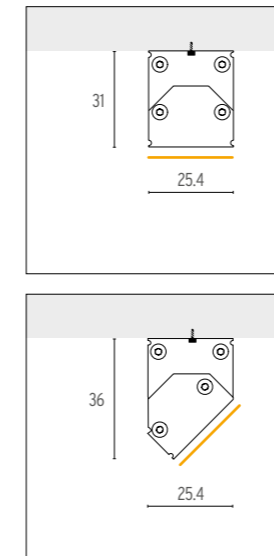

### Mounting accessories

No additional accessories are required for this mounting option.


### Description

Special designed mounting profile for surface-mounting options. Holes have to be drilled at site.

### Example of application



### 3. Surface-mounted, adjustable

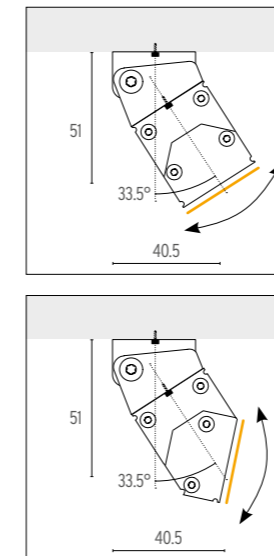

### Mounting accessories

- XOOLUM™ 007 Swivel-Angle Set +/- 45° Art.-#: 13000081

### Description

Adjustable clip for extra 45° tilt.

# XOOLUM™ Reflector IP67

XOOLUM™ R convinces by its high efficiency and low glare optics which keeping a compact design.

## XOOLUM™ R Reflector IP67



OUTDOOR

INDOOR

FLEXIBLE LIGHT ENGINE

MIX &amp; MATCH

DESIGN LUMINAIRES

APPENDIX



Impresses with high versatility and aluminum reflectors



Polyurethane is utilized in XOOLUM™ R to make it more resistant to impact from salt water UV-light and solvents.



Modular mounting and lighting scenery thanks to its LEDs-Click™ technology enabling a 45° tilt of the luminaire head.



Appealing form factor of 25.4 mm by 31 mm which blends easily in any architectural concepts.





[www.led-linear.com/xoolum](http://www.led-linear.com/xoolum)

LED Linear™ GmbH

# XOOLUM™ Reflector IP67

## Technical Specifications


- White
- IO White
- L80/B10 > 60,000 h
- IP67
- IK10

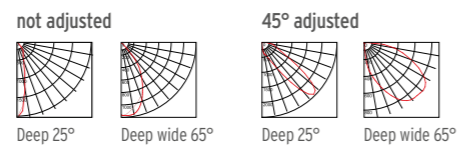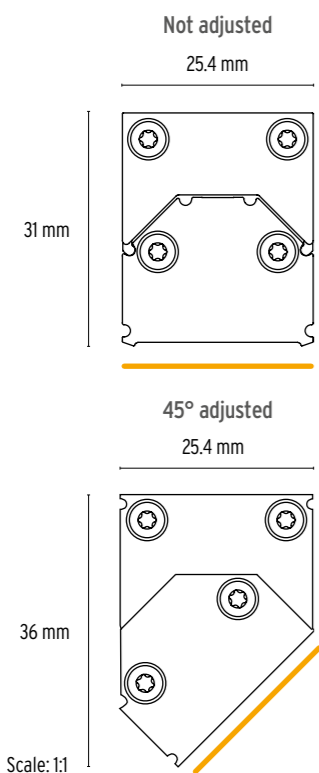

Cross section	25.4 mm x 31 mm / 25.4 mm x 36 mm
Length	198 mm - 4,010 mm
Power	5 W/m - 25 W/m
Luminous flux	340 lm/m - 3,090 lm/m
Efficacy	127 lm/W
Beam angle/optics	Reflectors: 25°, 65°
Color temperatures	2,500 K, 2,900 K, 3,300 K, 3,800 K, 4,300 K, 5,100 K, 6,100 K and 9,600 K
Colors	Tunable White (3,300 K - 6,100 K)
CRI	85 - 96

## Mounting All dimensions in mm.

### 1. Pendant

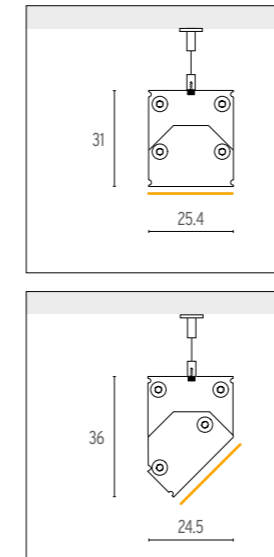

### Mounting accessories

- VarioPendant 007 Slide Silver Art.-#: 13000157
- VarioPendant 007 Slide Black Art.-#: 13000158
- VarioCANOPY Square Mounting set (optional) for pendant ceiling installations on concrete ceilings Art.-#: 16000347


### Description

Pendant set with screws for installations directly on the ceiling. 2 m Suspension is cuttable on site. Recommended to use two suspensions per meter.

### Example of application



### 2. Surface-mounted, fixed

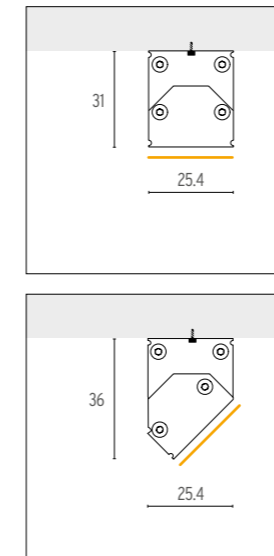

### Mounting accessories

No additional accessories are required for this mounting option.


### Description

Special designed mounting profile for surface-mounting options. Holes have to be drilled at site.

### Example of application



### 3. Surface-mounted, adjustable

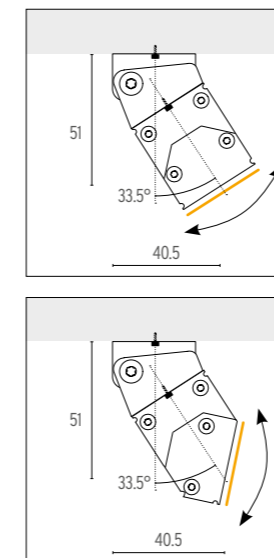

### Mounting accessories

- XOOLUM™ 007 Swivel-Angle Set +/- 45° Art.-#: 13000081

### Description

Adjustable clip for extra 45° tilt.

# XOOLUM™ Reflector Wall Wash IP67

Slim and discrete surface mount wall washer using a specular aluminum reflector tilted by 45° making the light source disappearing.



## XOOLUM™ Reflector Wall Wash IP67



### Smart solution for invisible wall washing



Alanod reflector technology for an excellent color mixing and homogeneous wall wash effect.



Polyurethane is utilized in XOOLUM™ R Wall Wash to make it more resistant to impact from salt water UV-light and solvents.



Compact design and simple surface mounting enabling a discrete installation in the ceiling.




[www.led-linear.com/xoolum](http://www.led-linear.com/xoolum)

LED Linear™ GmbH

# XOOLUM™ Reflector Wall Wash IP67

## Technical Specifications


- White
- IQ White
- RGB
- White / IQ White  
L80/B10 > 60,000 h
- RGB  
L80 > 30,000 h
- IP67
- IK10

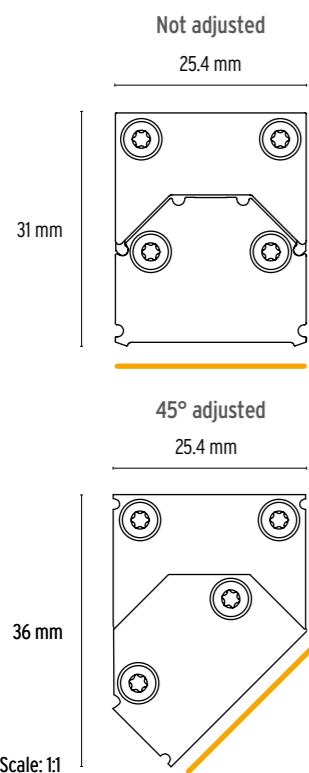

Cross section	25.4 mm x 31 mm / 25.4 mm x 36 mm
Length	198 mm - 4,010 mm
Power	5 W/m - 25 W/m
Luminous flux	340 lm/m - 3,090 lm/m
Efficacy	127 lm/W
Beam angle/optics	Wall Wash
Color temperatures	2,500 K, 2,900 K, 3,300 K, 3,800 K, 4,300 K, 5,100 K, 6,100 K and 9,600 K
Colors	Tunable White (3,300 K - 6,100 K), RGB
CRI	85 - 96

## Mounting All dimensions in mm.

### 1. Pendant

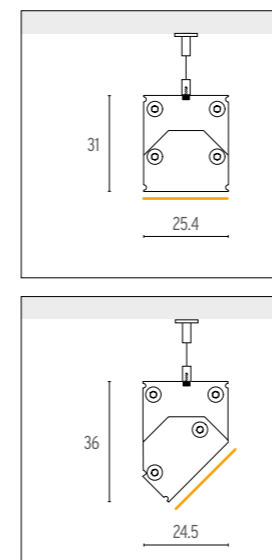

### Mounting accessories

- VarioPendant 007 Slide Silver Art.-#: 13000157
- VarioPendant 007 Slide Black Art.-#: 13000158
- VarioCANOPY Square Mounting set (optional) for pendant ceiling installations on concrete ceilings Art.-#: 16000347


### Description

Pendant set with screws for installations directly on the ceiling. 2 m Suspension is cuttable on site. Recommended to use two suspensions per meter.

### Example of application



### 2. Surface-mounted, fixed

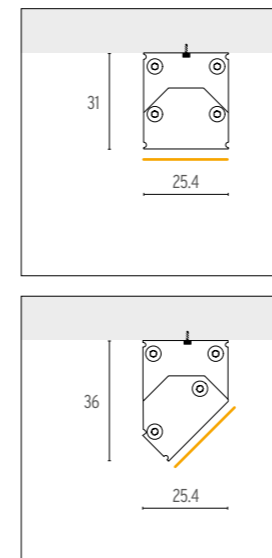


### Mounting accessories

No additional accessories are required for this mounting option.


### Description

Special designed mounting profile for surface-mounting options. Holes have to be drilled at site.

### Example of application

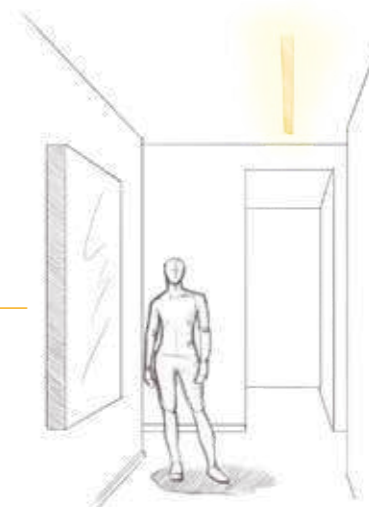

### 3. Surface-mounted, adjustable

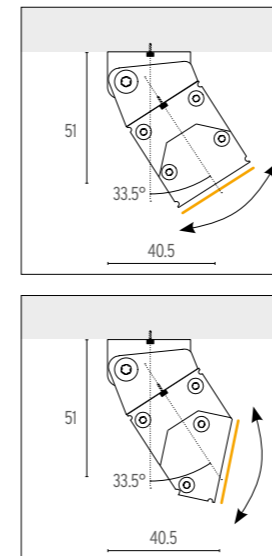

### Mounting accessories

- XOOLUM™ 007 Swivel-Angle Set +/- 45° Art.-#: 13000081

### Description

Adjustable clip for extra 45° tilt.


# XOOLIGHT™ IP67

XOOLIGHT™ with its classic and elegant design form is a luminaire for general illumination. The wide range of light sources enable a variety of lumen output and make it possible to use the fixture in public areas for ambient lighting.

Can Cullere

Photo: BMLD, Barcelona

## XOOLIGHT™ IP67

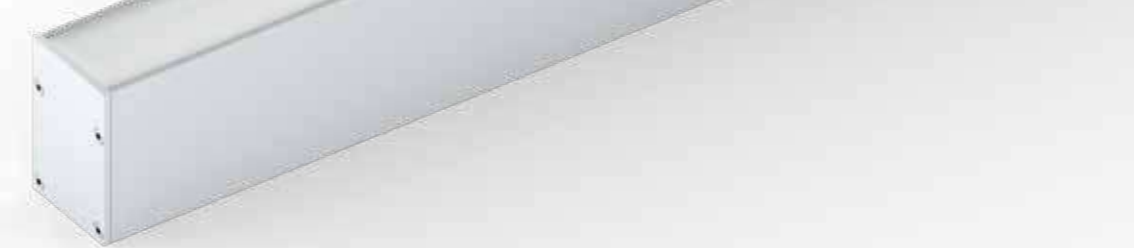

Excellent balance between design and functional lighting



Pleasing form factor of 42 mm x 62 mm.



3 different mounting possibilities for homogeneity throughout a building. It is therefore possible to utilize the same product at different locations using different construction types.



Freely scalable up to 4 m.




[www.led-linear.com/xoolight](http://www.led-linear.com/xoolight)

LED Linear™ GmbH

# XOOLIGHT™ IP67

## Technical Specifications

- White
- IQ White
- RGB
- L80/B10 > 50,000 h White / IQ White
- L80 > 30,000 h RGB
- IP67

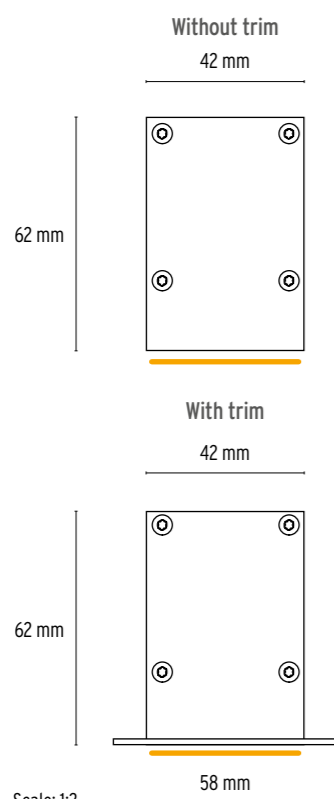


IP67 without lenses only and with opal encapsulation on top

Cross section	42 mm x 62 mm / 58 mm x 62 mm (recessed)
Length	84 mm - 4,021 mm
Power	6 W/m - 25 W/m
Luminous flux	240 lm/m - 1,770 lm/m
Efficacy	73 lm/W
Beam angle/optics	Opal
Color temperatures	2,400 K, 2700 K, 3,000 K, 3,500 K, 3,900 K, 4,600 K, 5,500 K and 7,200 K
Colors	Tunable White (2,900 K - 6,100 K), RGB
CRI	85 - 96

## Mounting All dimensions in mm.

### 1. Pendant




### Mounting accessories

- VarioPendant 4262  
Art.-#: 13000106
- VarioCANOPY Square Mounting set (optional) for pendant ceiling installations on concrete ceilings  
Art.-#: 16000347


### Description

Pendant set with screws for installations directly on the ceiling. 2 m Suspension is cuttable on site. Recommended to use two suspensions per meter.

### Example of application

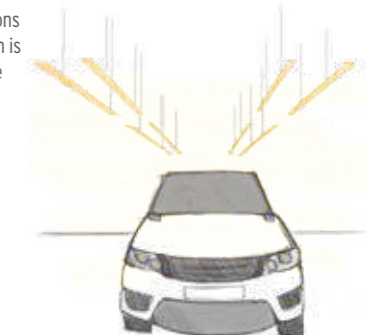

### 2. Recessed




### Mounting accessories

- VarioClamp Contour 4262R  
Art.-#: 13000080


### Description

The clamps can be adjusted in height to properly fit the thickness of the ceiling by tightening up the screw/bolt before clicking the light insert in.

### Example of application

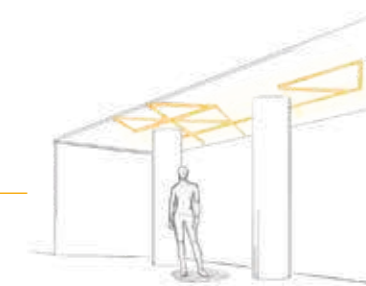

### 3. Surface-mounted, horizontal



### Mounting accessories

No additional accessories are required for this mounting option.

### Description

Special designed mounting profile for surface-mounting options. Holes have to be drilled at site.

# VARIOLED™ IP67

VarioLED™ IP67 fixtures are fully encapsulated linear LED light lines in aluminum profiles with excellent heat dissipation and very high lumen packages of up to 2,600 lm/m suitable for surface mounting and recessed installation and optimal for the indirect illumination of facades, baths and shower rooms, workshops, back lighting and other dusty or humid areas etc.




Photo: Jannes Linders

## VarioLED™ IP67



### High protection and optimum heat dissipation



Delivered ready to use with an IP67 connector on both ends and can be easily installed via clips or mounting profiles.



The aluminum profile is used for thermal management, so that even powerful LED strips with up to 25 W/m can be used.



The polyurethane encapsulation ensures an IP67 rating and high resistance against salt water and UV radiation by a clear polyurethane encapsulation.



[www.led-linear.com/varioledip67](http://www.led-linear.com/varioledip67)


LED Linear™ GmbH



# VarioLED™ IP67

## Technical Specifications





- White
- IQ White
- RGB
- White / IQ White  
L80/B10 > 60,000 h
- RGB  
L80 > 30,000 h
- IP67

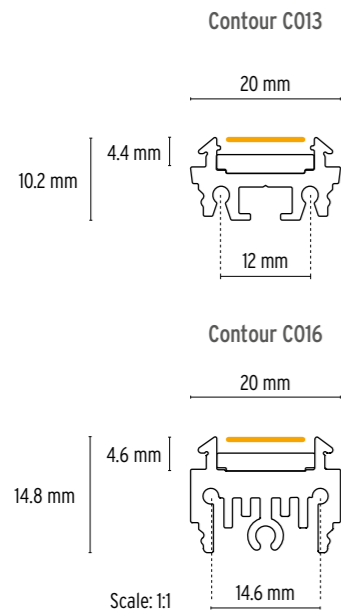






Cross section	20 mm x 10.2 mm / 20 mm x 14.8 mm
Length	up to 4 m
Power	3 W/m - 25 W/m
Luminous flux	up to 2,600 lm/m
Efficacy	up to 113 lm/W
Beam angle/optics	120°
Color temperatures	2,500 K, 2,900 K, 3,300 K, 3,600 K, 4,300 K, 4,900 K, 6,600 K and 9,600 K
Colors	Tunable White (3,300 K - 6,100 K), RGB
CRI	85 - 96

## Mounting All dimensions in mm.

### 1. Surface-mounted, Clips



### Mounting accessories

-  VarioClip Plastic  
Art.-#: 13000032
-  VarioClip 19 0°  
Art.-#: 10000040-01
-  VarioClip 19 15°  
Art.-#: 10000040-01-15D
-  VarioClip 19 30°  
Art.-#: 10000040-01-30D
-  VarioClip 19 45°  
Art.-#: 10000040-01-45D

### Description


Plastic surface mounting bracket, recommended to use every 50 cm.

Aluminum surface mounting bracket, recommended to use every 50 cm.


### Example of application



### 2. Surface-mounted, Profile



### Mounting accessories

-  VarioClip 19 Mounting Profile 0° - 2m  
Art.-#: 10000039-2m

### Description

Aluminum surface mounting profile in 2 m length.

### Example of application



**If the luminaire shall be installed without our mounting accessories, please get in touch with us to check the compatibility of the mounting.**

# IN-GROUND

Robust IP67 walk-over and roll-over (air filled tires) luminaire for in-ground installation with drainage management ideal for parking lots, roads or pedestrian areas. Luminaire using hard polyurethane encapsulation offering an optimal waterproof sealing, UV resistance, chemical stability against urban pollution and protection against abrasion damages.

Photo: Omri Amsalem

## VarioLED™ OCEANOS IP67 | Page 84

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
6 - 24	370 - 1,700	85 - 96	1,900 - 5,000	520 or 1,020

Robust, roll-over, dot free and homogeneous light line with 10° and 30° made of V4A stainless steel available in two standard lengths.



OUTDOOR

INDOOR

FLEXIBLE LIGHT ENGINE

MIX & MATCH

DESIGN LUMINAIRES

APPENDIX

# VARIOLED™ OCEANOS IP67

Precise engineered linear fixtures with IP67 and IK10 classifications suitable for challenging application environments. Installation system designed specifically for linear outdoor in-ground applications with continuous, homogeneous or directional lighting effects.



Photo: Suldal Foto

## VarioLED™ OCEANOS IP67



OUTDOOR

INDOOR

FLEXIBLE LIGHT ENGINE

MIX & MATCH

DESIGN LUMINAIRES

APPENDIX



Stainless steel housing



### Soft and endless in-ground light lines to lead the way



The V4A stainless steel housing makes the fixture extremely resistant to impact and helps to increase the resistance against vehicles driving over it.



The many different optics enable adaptability to different projects. The 10° optic suit well for wall grazing, as the 30° and opal are suitable for accent lighting.



IK10 classification and suitable for walk and drive over according to DIN EN 60598-2-13.





[www.led-linear.com/oceanos](http://www.led-linear.com/oceanos)

LED Linear™ GmbH

# VarioLED™ OCEANOS IP67

## Technical Specifications

- White
- IQ White
- RGB
- White / IQ White  
L80/B10 > 60,000 h
- RGB  
L80 > 30,000 h
- IP67
- IK10

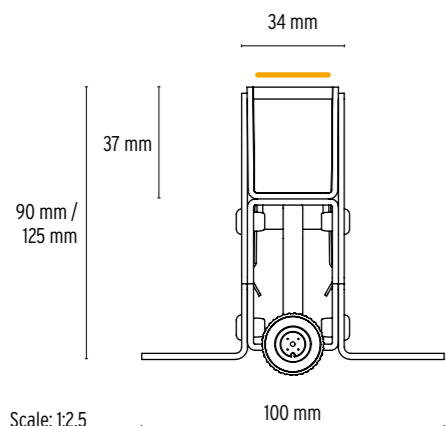


Scale: 1:2.5

Cross section	37 mm x 30 mm (fixture only)
Length	520 mm or 1,020 mm
Power	6 W/m - 24 W/m
Luminous flux	up to 1,700 lm/m
Efficacy	up to 113 lm/W
Beam angle/optics	Opal, 10° or 30° (clear encapsulation)
Color temperatures	Opal encapsulation: 1,900 K, 2,100 K, 2,300 K, 2,500 K, 2,800 K, 3,200 K, 3,700 K, 4,500 K With lens: 2,000 K, 2,200 K, 2,500 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K, 5,000 K
Colors	Tunable White (2,100 K - 4,500 K), RGB
CRI	85 - 96

## Mounting All dimensions in mm.

### 1. In-ground



1. solid base with drainage possibility
2. materials like stone, concrete, cement, rock, paving

### Mounting accessories

-  OCEANOS End Cap Mounting Kit  
Art.-#: 11000226
-  OCEANOS Dismounting tool  
Art.-#: 13100031
-  OCEANOS IP67 Cable Protection Cap  
Art.-#: 15000133
-  OCEANOS Mounting frame - Short (90 mm) MF316L 520 mm  
Art.-#: 10000541-L520
-  OCEANOS Mounting frame - Short (90 mm) MF316L 1020 mm  
Art.-#: 10000541-L1020
-  OCEANOS Mounting frame - Tall (125 mm) MF316L 520 mm  
Art.-#: 10000578-L520
-  OCEANOS Mounting frame - Tall (125 mm) MF316L 1020 mm  
Art.-#: 10000578-L1020

### Description

- Recommended at the end of each light lines to prevent vandalism.
- Use to take the fixture out of the in-ground mounting frame.
- Use to cap and seal the unused end of the cable before starting the inground installation. Required to maintain IP67 grade.
- Stainless steel mounting frame with dedicated chamber for cable management and drainage.
- Tall, Stainless steel mounting frame with dedicated chamber for cable management and drainage.

### Example of application



# GRAZER

Collection of IP67 luminaires with high lumen outputs and tight angle optics for longitudinally homogeneous outstanding grazing effects.



KALYPSO IQ White/RGB IP67 | Page 84



## XOO LUX™ NANO IP67 | Page 90

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
5 - 40	300 - 2,620	95	2,200 - 5,000	271 - 1,021

XOO LUX™ NANO is a minimalistic and flat luminaire designed primarily for grazing applications. The updated IP classification now stretch to IP67, meaning water resistance and suitable for canopied outdoor use.



## KALYPSO IP67 | Page 94

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
6 - 36	390 - 4,290	85 - 96	2,000 - 5,000	639 - 1,827

Compact and robust grazing luminaire in a small form factor. KALYPSO is designed with a cable groove that makes it possible to install the fixture without cables and clips disturbing the finish.



## VarioLED™ OCEANOS IP67 | Page 98

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
6 - 24	370 - 1,700	85 - 96	1,900 - 5,000	520 or 1,020

Robust in ground grazer made of V4A stainless steel available in standard lengths and 10° and 30° beam optic.



# XOOLUX™ NANO IP67

A sleek and functional design enables mountings close to the illuminated surface while keeping the luminaire as discrete as possible in the architecture for optimal grazing effects and minimally invasive installation.



## XOOLUX™ NANO IP67



### The age of nano optics has begun



Nano lens optics allow precise control of the light distribution while maximizing lumen output and minimizing color over angle for crisp and homogeneous grazing.



Different light distributions makes XOOLUX™ NANO the go-to product for grazing- as well as delicate flooding applications.



Further improving flexibility is achieved through the use of mounting clips, enabling tilt angles every 5° increments from 0° to 45°.

NANO RAY



XOOLUX™ NANO IP65



[www.led-linear.com/xoolux](http://www.led-linear.com/xoolux)

LED Linear™ GmbH


# XOOLUX™ NANO IP67

## Technical Specifications


- White
- IO White
- L80/B10 > 60,000 h
- IP67



Optic 15°   Optic 25°   Optic 15° x 40° (oval)






Cross section	41.4 mm x 17.7 mm
Length	up to 1 m
Power	5 W/m - 40 W/m
Luminous flux	up to 2,620 lm/m
Efficacy	up to 78 lm/W
Beam angle/optics	Oval (15° x 40°), 15° or 25°
Color temperatures	2,200 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K and 5,000 K
Colors	Tunable White (2,200 K - 5,000 K)
CRI	up to 95

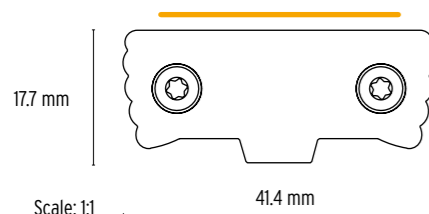

## Mounting All dimensions in mm.

### 1. Ceiling



### Mounting accessories

-  XOOLUX™ NANO Mounting Bracket, 0° - 15° Black Aluminum Art. #: 13000292-SCH
-  XOOLUX™ NANO Mounting Bracket, 15° - 30° Black Aluminum Art. #: 13000293-SCH
-  XOOLUX™ NANO Mounting Bracket, 30° - 45° Black Aluminum Art. #: 13000294-SCH




### Description

5 cm long, surface mounting brackets. Installs with screws to surface. The product can be tilted every 5 degrees inside the bracket.

### Example of application



### 2. Surface-mounted



### Mounting accessories

-  XOOLUX™ NANO Mounting Bracket, 0° - 15° Black Aluminum Art. #: 13000292-SCH
-  XOOLUX™ NANO Mounting Bracket, 15° - 30° Black Aluminum Art. #: 13000293-SCH
-  XOOLUX™ NANO Mounting Bracket, 30° - 45° Black Aluminum Art. #: 13000294-SCH



### Description

5 cm long, surface mounting brackets. Installs with screws to surface. The product can be tilted every 5 degrees inside the bracket.



### Example of application



### 3. Glare controlled




### Mounting accessories

-  XOOLUX™ NANO Shield 300 - 2042 mm Art. #: 13000377-0300-SCH  
13000377-0550-SCH  
13000377-0800-SCH  
13000377-1050-SCH  
13000377-2042-SCH
-  XOOLUX™ NANO IP67 Anti-Glare Black 250 mm Art. #: 10000608-0250-SCH

### Description

Glare shield with surface mounting brackets. Installed with screws to surface. The product can be tilted every 5 degrees inside the bracket. For a better glare control for people passing by.

### Example of application

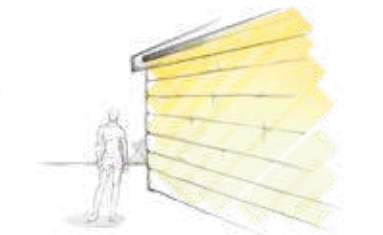

# KALYPSO IP67

KALYPSO is a minimalistic luminaire suitable for wall grazing. Due to its three optics, IP67 and IK rating, a large range of applications is covered. A maximum output of 4,290 lm/m combined with a CCT ranging between 2,000 K to 5,000 K makes KALYPSO a multifunctional luminaire.



Photo: studiocundela

## KALYPSO IP67



Convinces with light intensity and precise light control



High lumen output in minimalistic design with a small cross section of (W x H) 20.5 mm x 25.5 mm.



Screwed translucent end caps for continuous rows and an optimal sealing at both ends of the luminaire.



Robust polyurethane encapsulated fixture with IP67 and IK10 classification.



[www.led-linear.com/kalypso](http://www.led-linear.com/kalypso)


LED Linear™ GmbH




# KALYPSO IP67

## Technical Specifications

- White
- IQ White
- RGB
- RGBW
- White / IQ White  
L80/B10 > 60,000 h
- RGB  
L80 > 30,000 h
- IP67
- IK10




Cross section	20.5 mm x 25.5 mm
Length	639 mm, 952 mm, 1,264 mm, 1,514 mm, 1,827 mm
Power	6 W/m - 36 W/m
Luminous flux	up to 4,290 lm/m
Efficacy	121 lm/W
Beam angle/optics	10°, 30°, 60°
Color temperatures	2,000 K, 2,200 K, 2,500 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K and 5,000 K
Colors	Tunable White (2,200 K - 5,000 K), RGB, RGBW
CRI	85 - 96



## Mounting All dimensions in mm.

### 1. Surface Mounting fixed horizontal Mounting accessories




#### Description

Aluminum mounting clip with washer. Clips inside the fixture profile for an invisible mounting. Use according to the mounting instruction.

#### Example of application




### 2. Surface Mounting fixed vertical Mounting accessories




#### Description

Metal mounting block with set screw for vertical applications. Install inside the fixture profile to stop the fixture from sliding. Recommended to use one mounting lock per fixture and clips according to the mounting instruction.

#### Example of application




### 3. Surface Mounting adjustable Mounting accessories




#### Description

140 mm adjustable mounting clip with a tilt of 60° to each side. Recommended to use every 60 cm.

#### Example of application

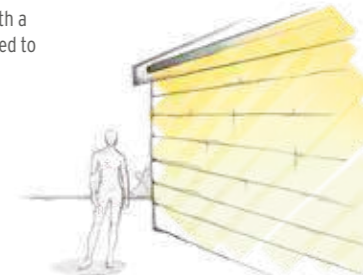


### 4. Wall Mounted adjustable Mounting accessories



#### Description

Metal surface mounting adjustable wall arm. The set includes mounting block, mounting clip and adjusting screws. Tilts 140° in each direction and screw locks in position. Recommended to use for every 90 cm. Silver finish.

#### Example of application

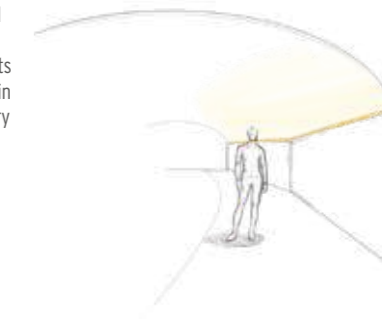

# VARIOLED™ OCEANOS IP67

Complete system solution designed and engineered to offer a robust housing (IK10) with continuous, homogeneous and directional lighting effects with 10° optics for wall grazing and 30° optics for accent lighting.

Photo: Shutterstock.com / Dr Ajay Kumar Singh

## VarioLED™ OCEANOS IP67



### In-ground drive over linear LED luminaire



Stainless steel housing



OCEANOS has an environmental resistance of IP67. This is made possible thanks to the unique polyurethane encapsulation.



The many different optics enable adaptability to different projects. The 10° optic suit well for wall grazing, as the 30° and opal are suitable for accent lighting.



OCEANOS has an IK10 classification hence is very robust. The ability to withstand a pressure of 30 kN is equivalent to being traversed by a vehicle according to DIN-EN-60598-2-13.





[www.led-linear.com/oceanos](http://www.led-linear.com/oceanos)

LED Linear™ GmbH


# VarioLED™ OCEANOS IP67

## Technical Specifications

- White
- IQ White
- RGB
- White / IQ White  
L80/B10 > 60,000 h
- RGB  
L80 > 30,000 h
- IP67
- IK10

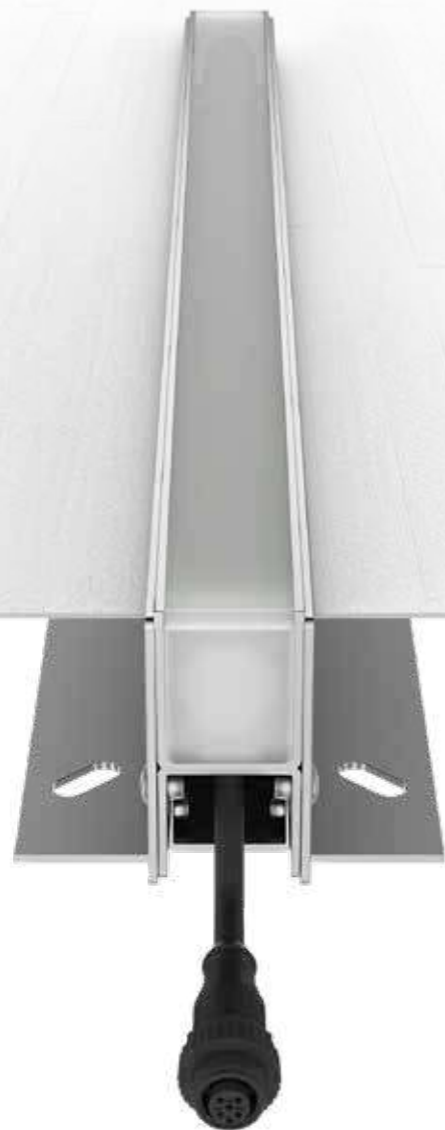


Cross section	37 mm x 30 mm (fixture only)
Length	520 mm or 1,020 mm
Power	6 W/m - 24 W/m
Luminous flux	up to 1,700 lm/m
Efficacy	up to 113 lm/W
Beam angle/optics	Opal, 10° or 30° (clear encapsulation)
Color temperatures	Opal encapsulation: 1,900 K, 2,100 K, 2,300 K, 2,500 K, 2,800 K, 3,200 K, 3,700 K, 4,500 K With lens: 2,000 K, 2,200 K, 2,500 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K, 5,000 K
Colors	Tunable White (2,100 K - 4,500 K), RGB
CRI	85 - 96

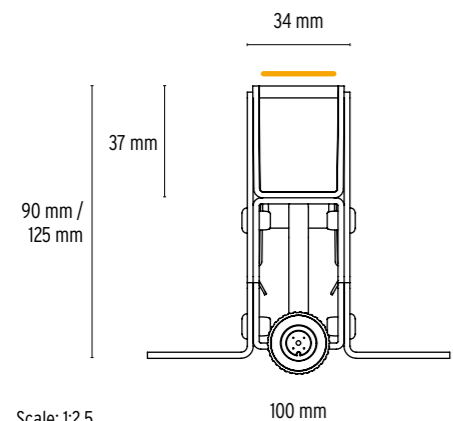

## Mounting All dimensions in mm.

### 1. In-ground



1. solid base with drainage possibility
2. materials like stone, concrete, cement, rock, paving

### Mounting accessories



OCEANOS End Cap Mounting Kit  
Art.-#: 11000226



OCEANOS Dismounting tool  
Art.-#: 13100031



OCEANOS IP67 Cable Protection Cap  
Art.-#: 15000133



OCEANOS Mounting frame - Short (90 mm) MF316L 520 mm  
Art.-#: 10000541-L520

OCEANOS Mounting frame - Short (90 mm) MF316L 1020 mm  
Art.-#: 10000541-L1020



OCEANOS Mounting frame - Tall (125 mm) MF316L 520 mm  
Art.-#: 10000578-L520

OCEANOS Mounting frame - Tall (125 mm) MF316L 1020 mm  
Art.-#: 10000578-L1020

### Description

Recommended at the end of each light lines to prevent vandalism.

Use to take the fixture out of the inground mounting frame.

Use to cap and seal the unused end of the cable before starting the inground installation. Required to maintain IP67 grade.

Stainless steel mounting frame with dedicated chamber for cable management and drainage.

Tall, Stainless steel mounting frame with dedicated chamber for cable management and drainage.

### Example of application



# UNDER WATER

Lighting elements create beautiful and pleasant environments when luminaires are placed inside water entities like pools, fountains, ponds and even tubs. Surface-mounted or recessed linear fixtures form homogeneous lines and increase the aesthetic appeal of the pool structure.



## NEPTUNE IP68 | Page 104

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
6 - 15	150 - 580	85 - 96	2,700 - 4,000	544 - 5,055

Rigid linear IP68 rated fixture with opal PVC extruded body and 220° beam angle in custom lengths up to 5 m.



INDOOR

FLEXIBLE LIGHT ENGINE

MIX &amp; MATCH

DESIGN LUMINAIRES

APPENDIX

# NEPTUNE IP68

Precisely engineered rigid linear fixture for lighting water features with challenging requirements. Specially designed for long homogeneous linear lines of light to create a pleasant atmosphere within the water feature as well as to accentuate the elements of design.

Photo: Hotel a. Gasthof Grünauerhof, Salzburg

## NEPTUNE IP68



INDOOR


### Setting standards in underwater lighting



Submersible up to 1 m (depths down to 5 m are also possible after consultation your LED Linear™ partner).



Chlorine resistant up to 5 ppm and even higher resistance during shock treatment.



Homogeneous lines of light up to 5 m in single piece.

FLEXIBLE LIGHT ENGINE

MIX & MATCH

DESIGN LUMINAIRES

APPENDIX




[www.led-linear.com/neptune](http://www.led-linear.com/neptune)

LED Linear™ GmbH


# NEPTUNE IP68

## Technical Specifications

- White
- > 50,000 h
- RGB
- > 30,000 h
- IP68



220°

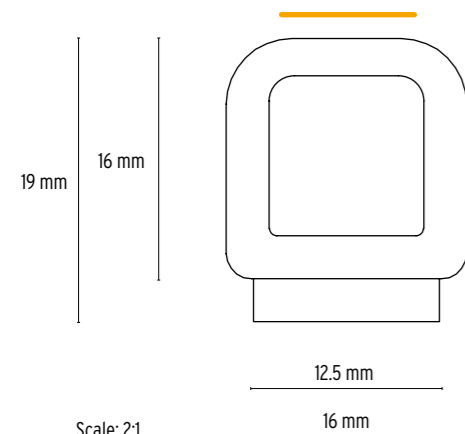


Scale: 2:1

Cross section	16 mm x 16 mm
Power	6 W/m, 10 W/m and 15 W/m
Luminous flux	up to 580 lm/m
Efficacy	up to 39 lm/W
Beam angle/optics	220°
Color temperatures	2,700 K, 3,000 K, 3,500 K and 4,000 K
Colors	RGB
CRI	up to 96

## Mounting All dimensions in mm.

### 1. Surface-mounted



### Mounting accessories



VarioClip TV 30 mm 316L  
(5 clips required/meter,  
stainless steel - V4A)  
water features  
Art.-#: 13000050-01


### Description

Special grade stainless steel surface mounting clip for harsh environments. Recommended to use for overhead mounting 5 brackets per meter (3 brackets for other mountings).

### Example of application



### 2. Recessed



### Mounting accessories



VarioClip TV 30 mm 316L  
(5 clips required/meter,  
stainless steel - V4A)  
water features  
Art.-#: 13000050-01

### Description

Special grade stainless steel surface mounting clip for harsh environments. Recommended to use for overhead mounting 5 brackets per meter (3 brackets for other mountings).

# INDOOR

Modular set of decorative to functional lighting solutions  
for indoor applications.

110 | **ALLROUNDER**  
Modular by definition.

138 | **GENERAL LIGHTING & TASK LIGHTING**  
Family of luminaires providing uniform lighting ambiance with limited glare to create the substitute of natural lighting within an enclosed indoor space.

168 | **COVE**  
Cove lighting system creating an ambient glow in the space purely with reflected lighting leading to a softer and soothing atmosphere.

174 | **WALL WASH**  
Collection of luminaires with asymmetric lighting optimized for Wall-wash application offering uniform vertical illumination of surfaces.

184 | **IN-GROUND**  
Assortment of in-ground light lines for guidance, decorative or grazing lighting applications.

VarioLED™ Flex VENUS family White Top View IP67 | Page 32  
VarioLED™ Flex HYDRA LD White | Page 178

# ALLROUNDER

Family of highly modular luminaires with slim extruded aluminum housings which can implement various optics. These luminaires can be used for grazing, ambient, decorative or indirect lighting as well as in coves.

VarioLED™ Flex HYDRA HD White | Page 202

Lighting design: Licht Kunst Licht  
Photo: Sichau & Walter Architekten



## ULTIMA IP40 family | Page 112

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
6 - 25	190 - 2,760	95	2,200 - 5,000	290 - 1,540

Highly modular miniature luminaire that can be flexibly integrated into any architecture. Available as a single luminaire or as a track system to allow any creative freedom in planning.



## XOOLINE™ IP40 | Page 122

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
4 - 42	320 - 4,070	85 - 98	2,200 - 5,000	380 - 3,014

Minimalistic modular surface mount luminaire with up to 10 different optics available for any application, cabling solutions for continuous runs and a large choice of mounting accessories.



## LYRA IP40 | Page 126

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
5 - 25	330 - 2,950	85 - 96	2,000 - 5,000	73 - 4,010

Elegant and chic round luminaire with the choice of LD and HD tapes further increasing the possibility of creating unique solutions.



## XOOLUM™ IP40 | Page 130

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
6 - 42	340 - 3,740	85 - 96	2,000 - 5,000	135 - 4,010

Compact luminaire with adjustable luminaire head (45°) which offers enormous modularity lighting effect and mounting wise.



## LUNA IP40 | Page 134

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
5 - 42	390 - 5,100	85 - 96	2,000 - 5,000	135 - 4,010

Sister of XOOLINE™ as a recessed version offering 3 more optics.



INDOOR

FLEXIBLE LIGHT ENGINE

MIX &amp; MATCH

DESIGN LUMINAIRES

APPENDIX



# ULTIMA FAMILY

ULTIMA represents a ground breaking step for lighting integration in the architecture. Its minimal design makes it blend in any building structure and disappear from sight. The ULTIMA family is divided into ULTIMA-S (standalone) and ULTIMA-T (track).



## ULTIMA Stand Alone IP40 | Page 114

The stand-alone version presents ULTIMA in its most compact form as a system. Its cross section of 10 mm x 13 mm (H x W) makes it an ideal candidate for finesse integrations or confined spaces.



### NANO

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
6 - 25	470 - 2,760	95	2,200 - 5,000	290 - 1,540



### Opal

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
6 - 25	190 - 1,190	95	2,200 - 5,000	290 - 1,540



## ULTIMA Track IP40 | Page 118

ULTIMA-T is a set of track modules which can be placed at will in an extended 24 V track system. Each module offers the exact same features as ULTIMA-S aside of its power feeding.



### NANO

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
6 - 20	470 - 2,160	95	2,200 - 5,000	290 - 1,540



### Opal

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
6 - 15	190 - 700	95	2,200 - 5,000	290 - 1,540



# ULTIMA STAND ALONE IP40

Ideal for furniture integration, showcase or display lighting, integration on grid ceilings or as surface mounted.



Photo: Shutterstock.com / Dr Ajay Kumar Singh


## ULTIMA Stand Alone IP40




Tailored for millwork integration



Smart design end cap enabling to orient the cable feed in the desired direction (back, left or right side) while keeping it hidden.



Various cable / connectors configurations to suit almost any installation scenario.



A set of strong magnets mounted on its backside enable mounting on metal structures or other smooth surfaces by the use of the adhesive metal strip.



NANO RAY

UGR <13



INDOOR

FLEXIBLE LIGHT ENGINE

MIX & MATCH

DESIGN LUMINAIRES


APPENDIX




# ULTIMA Stand Alone IP40

## Technical Specifications

- White
- IO White only NANO
- L80/B10 > 60,000 h
- IP20/ IP40

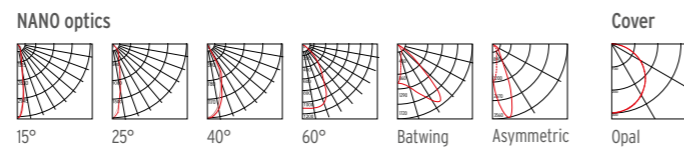


Cross section	10 mm x 13 mm (H x W)
Length	290 mm / 540 mm / 790 mm / 1,040 mm / 1,290 mm / 1,540 mm
Power	<b>NANO:</b> 6 W/m, 10 W/m, 15 W/m, 20 W/m, 25 W/m <b>Opal:</b> 6 W/m, 10 W/m, 15 W/m, 25 W/m
Luminous flux	<b>NANO:</b> 470 lm/m - 2,760 lm/m // <b>Opal:</b> 190 lm/m - 1,190 lm/m
Efficacy	up to 117 lm/W
Beam angle/optics	15°, 25°, 40°, 60°, Batwing, Asymmetric or Opal
Color temperatures	2,200 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K and 5,000 K
Colors	Tunable White (only NANO) (2,200 K - 5,000 K)
CRI	up to 95

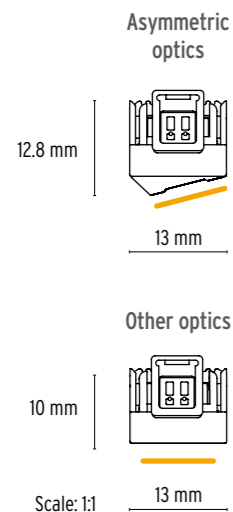

## Mounting All dimensions in mm.

### 1. Magnetic




#### Mounting accessories



#### Description


Metal strip with adhesive tape on the backside for easy integration into furniture.

#### Example of application




Metal strip with adhesive tape on the backside for easy installation on almost every surface.

### 2. Surface-mounted clip





#### Mounting accessories



#### Description


Clips for surface mounting.

#### Example of application



Clip for secure attachment, ideal for furniture installation.

### 3. Grid ceiling clip



#### Mounting accessories




#### Description

Grid ceiling clip for easy mounting on the cross struts of the ceiling.

#### Example of application



### 4. Adjustable mounting clip



#### Mounting accessories



#### Description

Adjustable mounting clip for easy adjustment of the luminaire.

# ULTIMA TRACK IP40

Ideal for gallery & museum lighting or spaces requiring multiple lighting effects with strong structural restrictions. ULTIMA-T can be placed anywhere in the recessed trimless, recessed with trim or surface / pendant track systems.



## ULTIMA Track IP40


NANO

Opal

### Tailored for millwork integration



ULTIMA-T embeds electrical contact at its ends for a simple contacting in the track (patent pending). Just click the ULTIMA-T module in the pre-installed track system without having to worry about complex cabling.



Each light module can be freely moved within its track by simply sliding it which provides a full flexibility necessary in dynamic places such as galleries or showrooms.



Thanks to the 4 x 2.4 mm<sup>2</sup> copper lines in each track, runs up to 10 m are possible. They also enable the control of two different lighting scenes by connecting ULTIMA-T modules to two independent channels.

NANO RAY 2.0

UGR <13



[www.led-linear.com/ultima](http://www.led-linear.com/ultima)

LED Linear™ GmbH

INDOOR

FLEXIBLE LIGHT ENGINE

MIX & MATCH

DESIGN LUMINAIRES

APPENDIX

# ULTIMA Track IP40





## Technical Specifications

Pendant  
(2 flames)

Surface-mounted


Recessed with trim

Recessed trimless

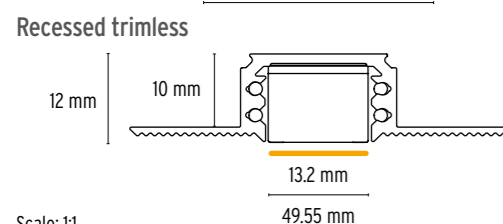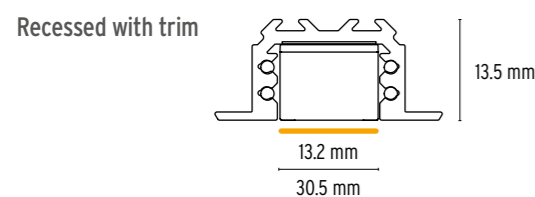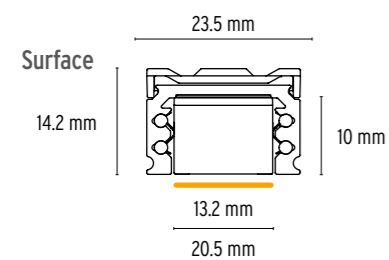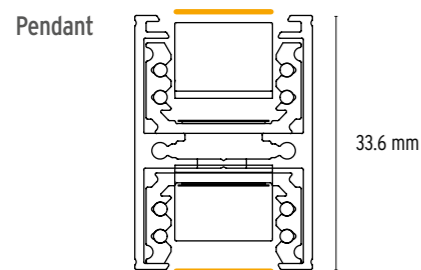

Scale: 1:1


NANO optics



Cross section	14.2 mm x 20.5 mm (H x W)
Length	290 mm / 540 mm / 790 mm / 1,040 mm / 1,290 mm / 1,540 mm
Power	<b>NANO:</b> 6 W/m, 10 W/m, 15 W/m, 20 W/m <b>Opal:</b> 6 W/m, 10 W/m, 15 W/m
Luminous flux	<b>NANO:</b> 470 lm/m - 2,160 lm/m // <b>Opal:</b> 190 lm/m - 700 lm/m
Efficacy	up to 117 lm/W
Beam angle/optics	15°, 25°, 40°, 60°, Batwing, Asymmetric or Opal
Color temperatures	2,200 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K and 5,000 K
Colors	Tunable White (only NANO) (2,200 K - 5,000 K)
CRI	up to 95

## Mounting All dimensions in mm.

### 1. Surface-mounted



#### Mounting accessories




#### Description

Track and Clip for surface mounting.


#### Example of application



### 2. Recessed trimless



#### Mounting accessories




#### Description

Trimless track for plastering

#### Example of application



### 3. Recessed with trim



#### Mounting accessories




#### Description


Mounting spring for recessed mounting.

#### Example of application

### 4. Grid ceiling T-bar




#### Mounting accessories



#### Description

Surface-mounted track and grid ceiling clip for easy mounting on the t-bars of the ceiling.

### 5. Adjustable mounting clip




#### Mounting accessories



#### Description

Adjustable mounting clip for easy adjustment of the luminaire.

### 6. Pendant



#### Mounting accessories



#### Description

Pendant kit for pendant solution.

# XOOLINE™ IP40

XOOLINE™ is a minimalistic modular luminaire suitable for wall grazing, general lighting and a multitude of other applications. A variety of light engines ranging from static white to RGBW, with color temperatures from 2,200 K to 5,000 K, 10 optics to choose from, 8 different mounting accessories plus further options make XOOLINE™ an extremely versatile lighting tool.



Photo: Whitelight Studio Berlin, Jens Bösenberg

## XOOLINE™ IP40

NEW



### Minimal luminaire with maximum versatility



Translucent end caps and special cable exit solutions make it easy to create infinite lines of light.



Housing and mounting profile are also available in black for directly visible applications.



Minimalistic form factor and several cable exit and connector options enable seamless integration.




[www.led-linear.com/xooline](http://www.led-linear.com/xooline)

LED Linear™ GmbH


- White
- IQ White
- RGB
- RGBW
- White / IQ White  
L80/B10 > 60,000 h
- RGB  
L80 > 30,000 h
- IP40




Linear lens




Low cover




Round cover



High square cover



\* not for RGBW

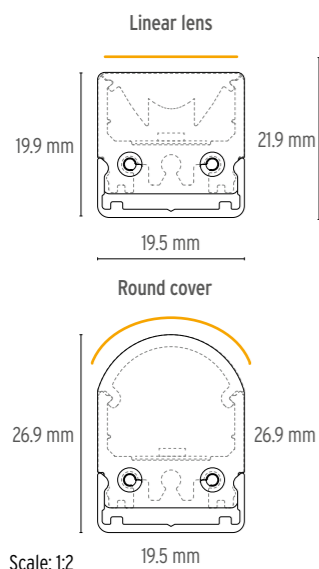


Scale: 1:2

Length	up to 3,014 mm
Power	4 W/m - 42 W/m
Luminous flux	390 lm/m - 4,070 lm/m
Efficacy	up to 141 lm/W
Beam angle/optics	opal, diffuse, clear, 10°, 30°, 60°
Color temperatures	2,200 K, 2,500 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K and 5,000 K
Colors	Tunable White (HE 2,500 K - 4,000 K / HC 2,200 K - 5,000 K / UHC 2,700 K - 6,500 K), RGB, RGBW
CRI	up to 98

Mounting All dimensions in mm.

1. Surface-mounted\*, horizontal



\* Low cover


Mounting accessories

- Full length mounting channel  
Digits in order code: MP
- 0° aluminum mounting clip in 90 mm length  
Digits in order code: CL0
- 15° aluminum mounting clip in 90 mm length  
Digits in order code: CL15
- 30° aluminum mounting clip in 90 mm length  
Digits in order code: CL30
- 45° aluminum mounting clip in 90 mm length  
Digits in order code: CL45


Description

Aluminum surface mounting bracket, recommended to use every 50 cm. Available in four different angles.

Example of application

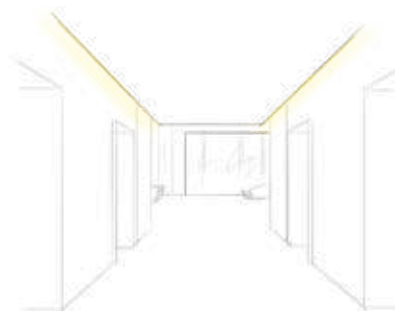

2. Surface-mounted, vertical



Mounting accessories

- Plastic Mounting Bracket  
Digits in order code: PCL


Description

White plastic surface mounting clip. Recommended to use every 50 cm. Cannot be used together with the aluminum mounting profile.

Example of application



3. Adjustable, vertical\*



Mounting accessories

- Adjustable Bracket  
Digits in order code: AMC

Description

Use to adjust and fix the angle of fixture. 180 degrees adjusting range. Delivered with axis screw.


Example of application



\* Mounting option AMC is not available for Tunable White Luminaires in combination with an 'LD' light engine.

Cable feed options BS and FS can't be combined with mounting option AMC.

4. Wall-mounted



Mounting accessories

No additional accessories are required for this mounting option. Digits in order code: WMP

Description

Full length mounting channel, sets light axis parallel to wall. Connectors fit into gap between luminaire and wall.

# LYRA IP40

LYRA is a slim luminaire, applicable as pendant or surface mount. The possibility to rotate the fixture makes it possible to illuminate targets in any direction.



# LYRA IP40



Perfectly shaped and stylish lighting solution



The lumen output up to 2,950 lm/m is high for such a minimalistic fixture.



The elegant spirit of LYRA is also shown in the mounting clips, which enable both pendant and surface mount.



The possibility to choose between a linear lens or a clear cover provides flexibility and makes it possible to create multiple light distributions.



[www.led-linear.com/lyra](http://www.led-linear.com/lyra)


LED Linear™ GmbH



# LYRA IP40


## Technical Specifications

- White
- IQ White
- RGB
- L80/B10 > 60,000 h
- L80 > 30,000 h
- IP40

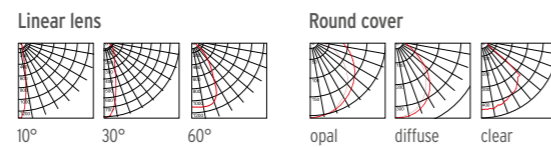

### Linear lens

20 mm



13.1 mm

### Round cover

20 mm




20 mm

Scale: 1:1

Cross section	ø 20 mm
Length	up to 4,010 mm
Power	5 W/m - 25 W/m
Luminous flux	up to 2,950 lm/m
Efficacy	up to 121 lm/W
Beam angle/optics	10°, 30°, 60°, opal, diffuse, clear
Color temperatures	2,000 K, 2,200 K, 2,500 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K and 5,000 K
Colors	Tunable White (HYDRA: 2,500 K - 4,000 K / ATON: 2,200 K - 4,000 K), RGB
CRI	85 - 96
Profile colors	Black, Silver

## Mounting All dimensions in mm.

### 1. Pendant




### Mounting accessories

- VarioPendant 024 Set Silver  
Art.-#: 13000161
- VarioPendant 024 Set Black  
Art.-#: 13000161-SCH
- VarioCANOPY Square Mounting set (optional) for pendant ceiling installations on concrete ceilings  
Art.-#: 16000347


### Description

Pendant set with screws for installations directly on the ceiling. 2 m Suspension is cuttable on site. Recommended to use two suspensions per meter.

### Example of application

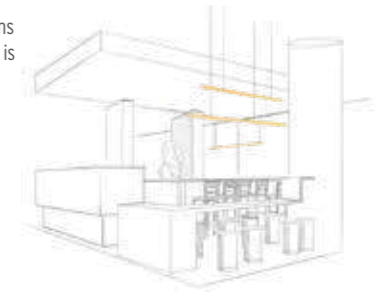

### 2. Surface-mounted





### Mounting accessories

- VarioClip 024 Silver  
Art.-#: 13000160
- VarioClip 024 Black  
Art.-#: 13000160-SCH

### Description

Surface mount clips with screws for installation directly on the wall or ceiling. Recommended to use 2 clips per meter.

### Example of application

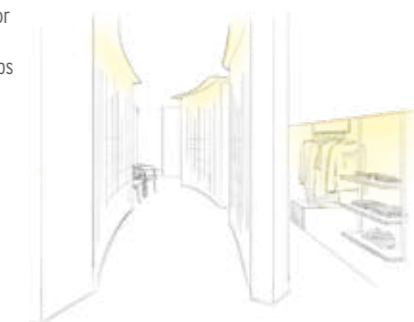

- VarioContour 024 Surface Mounting Set  
Art.-#: 13000162

# XOOLUM™ IP40

XOOLUM™ is applicable in almost any area and project thanks to the many covers and reflectors. The mounting possibilities are surface, pendant and cove and it is possible to tilt the fixture in an 45° angle.

XOOLUM™ is suitable as the general or functional light source in offices, production areas, schools and museums.



# XOOLUM™ IP40



The smallest and brightest lighting solutions for general illumination



High lumen output up to 3,740 lm/m and efficiency of 105 lm/W in combination with a minimalistic design makes XOOLUM™ an efficient product.



The range of covers and reflectors (25°, 65° and Wall Washer) increase the flexibility of XOOLUM™.



XOOLUM™ is a two in one fixture thanks to the possibility to mount it with an 45° angle. The mounting possibilities are surface, pendant and cove.



[www.led-linear.com/xoolum](http://www.led-linear.com/xoolum)





LED Linear™ GmbH

# XOOLUM™ IP40

## Technical Specifications


- White
- IQ White
- RGB
- RGBW
- White / IQ White  
L80/B10 > 60,000 h
- RGB  
L80 > 30,000 h
- IP40

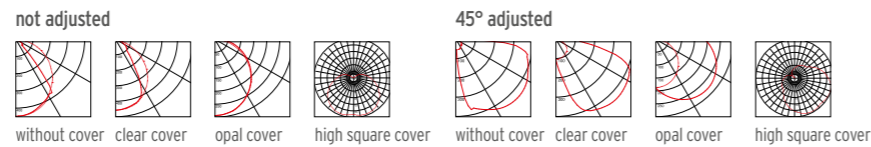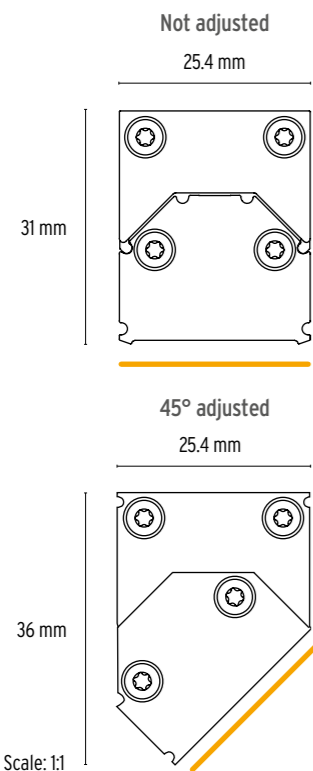

Cross section	25.4 mm x 31 mm / 25.4 mm x 36 mm
Length	135 mm - 4,010 mm
Power	6 W/m - 42 W/m
Luminous flux	340 lm/m - 3,740 lm/m
Efficacy	up to 105 lm/W
Beam angle/optics	Opal, Clear, without cover (Reflector optics please see page 164)
Color temperatures	2,000 K, 2,200 K, 2,500 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K and 5,000 K
Colors	Tunable White (2,200 K - 5,000 K), RGBW, RGB
CRI	85 - 96

## Mounting All dimensions in mm.

### 1. Pendant

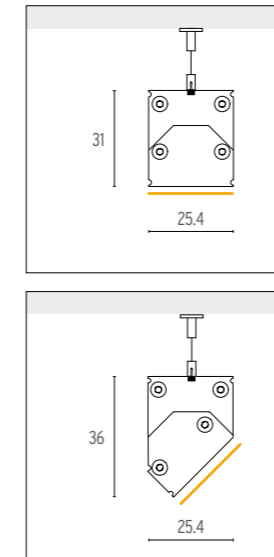

### Mounting accessories

- VarioPendant 007 Slide Silver  
Art.-#: 13000157
- VarioPendant 007 Slide Black  
Art.-#: 13000158
- VarioCANOPY Square Mounting set (optional) for pendant ceiling installations on concrete ceilings  
Art.-#: 16000347


### Description

Pendant set with screws for installations directly on the ceiling. 2 m Suspension is cuttable on site. Recommended to use every 1 m.

### Example of application



### 2. Surface-mounted, fixed

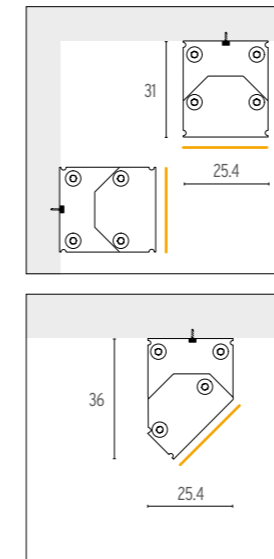

### Mounting accessories

No additional accessories are required for this mounting option.


### Description

Special designed mounting profile for surface-mounting options. Holes have to be drilled at site.

### Example of application



### 3. Surface-mounted, adjustable

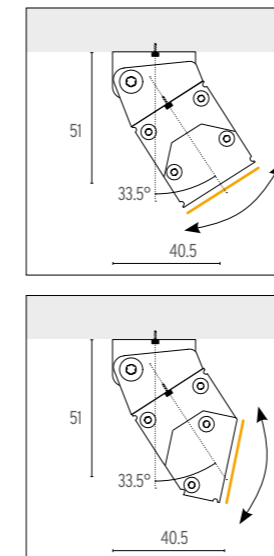

### Mounting accessories

- XOOLUM™ 007 Swivel-Angle Set +/- 45°  
Art.-#: 13000081

### Description

Adjustable clip for extra 45° tilt.

# LUNA IP40

LUNA is a recessed luminaire with IP40 classification. It is possible to choose between 12 different optics. The smooth lines of LUNA with a flat cover is perfectly integrated into ceiling creating long light lines. This makes it possible to meet the demands of most projects.



Photo: KKS Stragety LLP / Timothy Soar

# LUNA IP40



Discreet and elegant - the lighting solution for recessed applications



9 different covers for flexibility in applications and 3 different lenses increases possible solutions.



High lumen output in minimalistic design up to 5,100 lm/m.



LUNA is minimally invasive and designed in a way that enables easy installation thanks to pre-mounted springs and low installation depth.






[www.led-linear.com/luna](http://www.led-linear.com/luna)

LED Linear™ GmbH

# LUNA IP40

## Technical Specifications


- White
- IQ White
- RGB
- L80/B10 > 60,000 h White / IQ White
- L80 > 30,000 h RGB
- IP40

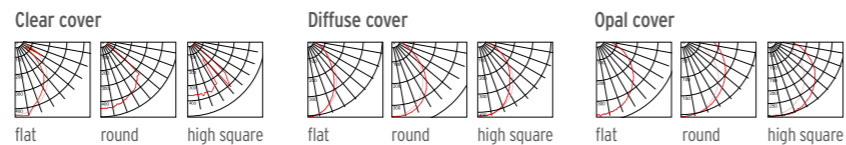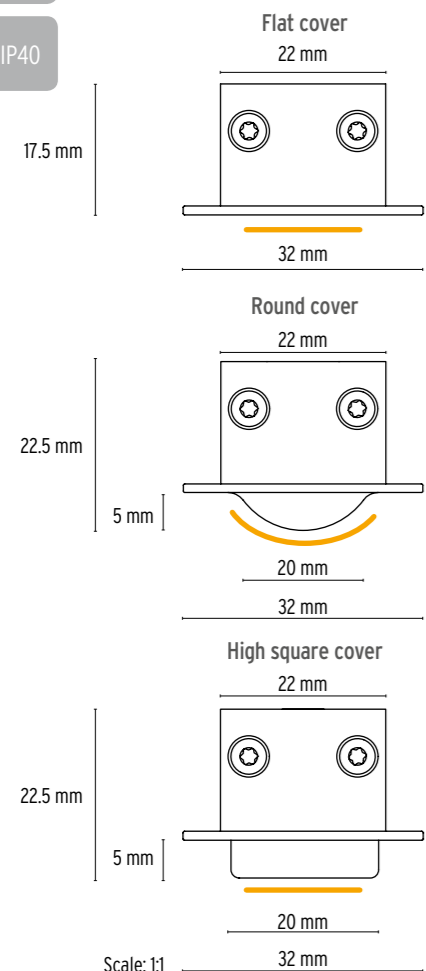

Cross section	32 mm x 17.5 mm / 32 mm x 22.5 mm
Length	up to 4,010 mm
Power	5 W/m - 42 W/m
Luminous flux	up to 5,100 lm/m
Efficacy	up to 143 lm/W
Beam angle/optics	10°, 30°, 60°, clear, diffuse, opal
Color temperatures	2,000 K, 2,200 K, 2,500 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K and 5,000 K
Colors	Tunable White (HYDRA: 2,500 K - 4,000 K / ATON: 2,200 K - 4,000 K), RGB
CRI	85 - 96

## Mounting All dimensions in mm.

### 1. Recessed



### Mounting accessories

No additional accessories are required for this mounting option.

### Description

Mounting springs are pre mounted. Luminaire can be installed directly into false ceiling.

### Example of application



# GENERAL LIGHTING & TASK LIGHTING

Assortment of functional luminaires offering homogeneous illumination with wide or narrow distributions for ambient lighting as well as excellent glare control for task lighting.

VarioLED™ Flex HYDRA LD/HD White | Page 178

Photo: KKS Strategy LLP/Timothy Soar



## ULTIMA-P IP40 | Page 140

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
15 / 20	740 - 1,840	95	2,700 - 4,000	1,092 - 1,592

Unobtrusive and minimal pendant luminaire, yet packing a powerful punch and suitable for any task lighting. Intended primarily as a stand-alone luminaire, with multiple options.

NEW



## MARS ARCHITECTURAL family | Page 144

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
15 - 42	1,400 - 3,460	95	2,700 - 4,000	345 - 3,020

A system of stylish linear solutions offering minimalist design language with maximum lighting as well as a multitude of options.



## XOOMINAIRE™ 4292 IP40 | Page 156

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
15 - 40	1,690 - 4,120	85	2,700 - 4,000	887 - 1,512

Direct and indirect luminaire available as pendant or wall-mounted with the same width and optics as 4262 which enables a consistent visual in large project implementing both luminaires. Ideal for open space offices or corridor wall-mounted lighting in hospitals for example.



## XOOLUM™ Opal Continuous IP20 | Page 160

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
5 - 40	340 - 3,710	85 - 96	2,000 - 5,000	135 - 4,010

Compact opal dot free luminaire with continuous cover which offers uninterrupted light lines up to 15 m long.



## XOOLUM™ Reflector IP20 | Page 164

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
5 - 40	340 - 3,710	85 - 96	2,000 - 5,000	135 - 4,010

Small form factor and yet modular luminaire with adjustable light head embedding specular reflectors with excellent glare control.



INDOOR

FLEXIBLE LIGHT ENGINE

MIX & MATCH

DESIGN LUMINAIRES

APPENDIX

# ULTIMA-P

Ideal for pendant task lighting over workdesks, counters and smaller meeting room tables.



## ULTIMA-P IP40



NANO  
RAY 2.0

UGR  
<14



### Minimal pendant luminaire



Extremely small for a pendant luminaire, especially when considering the built-in optical technology and an output of up to 1,840 lm/m.



NanoRay 2.0 optics offer precise beam and glare control with minimal color over angle.



Standard includes multiple variations like 40° or 60°, Batwing and opal optics; 4 different color temperatures as well as 6 different housing/antiglare color combinations.


For ULTIMA family




# ULTIMA-P IP40

## Technical Specifications

- White
- IO White only NANO
- L80/B10 > 60,000 h
- IP40

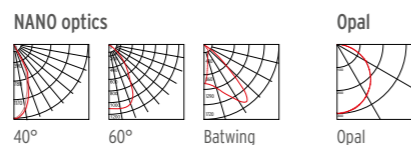

Cross section	12 mm x 16.2 mm (H x W)
Length	1,092 mm / 1,592 mm
Power	<b>NANO:</b> 15 W/m and 20 W/m // <b>Opal:</b> 15 W/m
Luminous flux	<b>NANO:</b> 1,400 lm/m - 1,840 lm/m // <b>Opal:</b> 740 lm/m - 780 lm/m
Efficacy	up to 133 lm/W
Beam angle/optics	40°, 60°, Batwing or Opal
Color temperatures	2,700 K, 3,000 K, 3,500 K and 4,000 K
Colors	Tunable White (only NANO) 2,200 K - 5,000 K
CRI	up to 95



## Mounting All dimensions in mm.

	Mounting accessories	Description	Example of application
1. Pendant, false/concrete ceiling	Mounting option "C" in order code	Ceiling fasteners for false ceiling or concrete ceilings.	
2. Pendant, Grid ceiling	Mounting option "G" in order code	Grid ceiling clip for easy mounting on the cross struts of the ceiling.	
3. Pendant, Connector	Luminaire connector ULTIMA-P (Set) Art.-#: 13000408-SCH	Mechanically connect two adjacent luminaires.	

## Power & Controls

The following accessories are included with the luminaire if chosen as part of the order code.

- 1a. Surface mounted canopy with driver\*  PSU option "C" in order code VarioCANOPY Square Mounting set (optional) for pendant ceiling installations on concrete ceilings. (suitable for all countries except North America)
- 1b. External driver\*  PSU option "E" in order code VarioPSU 24V/35W IP20, 100-277 V (suitable for all countries except North America)
- 2a. CASAMBI  Control option "C" in order code IN.finite Casambi 2CH CV
- 2b. DALI DT-6  Control option "D" in order code IN.finite DALI DT6 2CH CV

\* If PSU option "C" or "E" was chosen as part of order code, no further accessories are required to install and operate the luminaire.



# MARS ARCHITECTURAL – PENDANT

The timeless design of MARS ARCHITECTURAL blends in perfectly in offices but is also a valuable solution for education facilities, retail environments, public buildings and warehouses. The very wide range of options enables almost any general lighting application.



## MARS ARCHITECTURAL – PENDANT

NEW



NANO RAY

UGR <13



### Excellent balance between design and functional lighting



True nano optics in four precise beam angles combined with an antiglare provide near invisible light and an UGR as low as < 13. An additional variant with an opal diffuser rounds off the options.



A multitude of options include several power levels and color temperatures plus options in tunable white and RGBW, as well as two form factors to choose from.



The pendant luminaires are available in three housing and antiglare colors that can be freely combined. All luminaires with external drivers are powered with a transparent cable. The type 62 also features magnetically fastened end caps to provide a clean finish.




[www.led-linear.com/mars-arc-p](http://www.led-linear.com/mars-arc-p)

LED Linear™ GmbH

Technical Specifications

- White
- IO White
- Only MARS ARCHITECTURAL OPAL
- RGBW
- L80/B10 > 60,000 h
- IP40

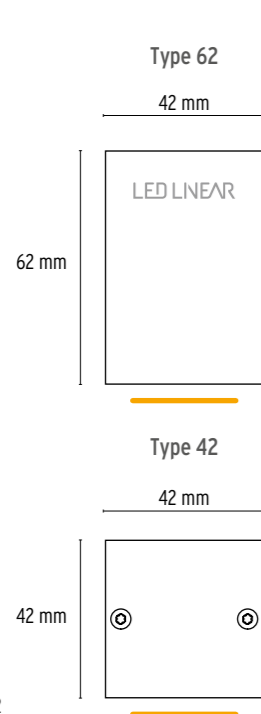


	Nano optics	Diffusor
Cross section	42 mm x 62 mm (Type 62) / 42 mm x 42 mm (Type 42)	
Length	345 mm - 3,020 mm	
Power	15 W/m - 42 W/m	
Luminous flux	up to 3,460 lm/m	
Efficacy	up to 105 lm/W	
Beam angle/optics	Nano optics: 15°, 25°, 40° or 65°/ Diffusor: Opal	
Color temperatures	2,700 K, 3,000 K, 3,500 K and 4,000 K	
Colors	Tunable White (2,200 K - 5,000 K), RGBW (only opal optics)	
CRI	95 (except at 2,200 K and 5,000 K)	

Scale: 1:2

Mounting All dimensions in mm.

1. Pendant



Mounting accessories

The required accessories for pendant mounting are included with the luminaire.



VarioPendant 4242/4262 C  
Art.-#: 13000106

Description

Pendant set with screws for installations directly on the ceiling. Recommended to use every 1 m.

Example of application



# MARS ARCHITECTURAL – RECESSED

The timeless design of MARS ARCHITECTURAL blends in perfectly in offices but is also a valuable solution for education facilities, retail environments, public buildings and warehouses. The very wide range of options enables almost any general lighting application.



Photo: toneteam

## MARS ARCHITECTURAL – RECESSED

NEW



### The nearly invisible linear downlight



True nano optics in four precise beam angles combined with an antiglare provide near invisible light and an UGR as low as <math>< 13</math>. An additional variant with an opal diffuser rounds off the options.



Driver and controls can be integrated or external - installations that suit external drivers benefit from the small luminaire height of 31mm including mounting springs, allowing installation in shallow spaces.



Smaller luminaires are more sustainable as less raw materials are used in production and less energy consumed during transport to site.

NANO  
RAY

UGR  
<math>< 13</math>



INDOOR

FLEXIBLE LIGHT ENGINE

MIX & MATCH

DESIGN LUMINAIRES

APPENDIX



[www.led-linear.com/mars-arc-r](http://www.led-linear.com/mars-arc-r)




LED Linear™ GmbH

# MARS ARCHITECTURAL – RECESSED NEW

## Technical Specifications




- White
- IO White
- RGBW  
Only MARS ARCHITECTURAL OPAL
- L80/B10  
> 60,000 h
- IP40

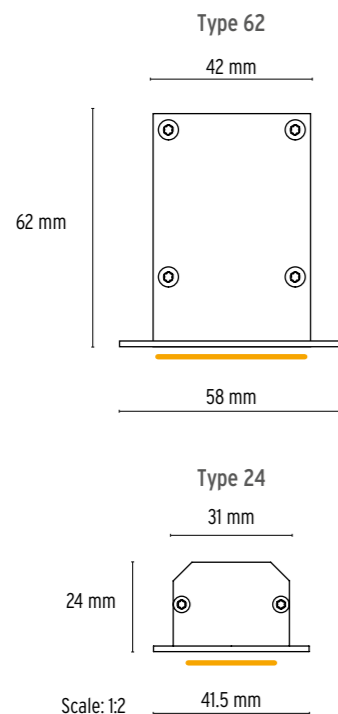

Nano optics		Diffusor		
15°	25°	40°	65°	opal
Cross section		42 mm x 62 mm (Type 62) / 41.5 mm x 24 mm (Type 24)		
Length		345 mm - 3,020 mm		
Power		15 W/m - 42 W/m		
Luminous flux		up to 3,460 lm/m		
Efficacy		up to 105 lm/W		
Beam angle/optics		Nano optics: 15°, 25°, 40° or 65°/ Diffusor: Opal		
Color temperatures		2,700 K, 3,000 K, 3,500 K and 4,000 K		
Colors		Tunable White (2,200 K - 5,000 K), RGBW (only opal optics)		
CRI		95 (except at 2,200 K and 5,000 K)		

## Mounting All dimensions in mm.

1. Recessed with trim (driver internal)



Mounting accessories



VarioClamp Contour 4262R  
Art.-#: 13000080


Description

The required brackets for recessed mounting are included with the luminaire.

Example of application



2. Recessed with trim (driver external)



Mounting accessories

No additional accessories are required for this mounting option.

Description

The mounting springs are already fitted to the luminaire.

# MARS ARCHITECTURAL – SURFACE

The timeless design of MARS ARCHITECTURAL blends in perfectly in offices but is also a valuable solution for education facilities, retail environments, public buildings and warehouses. The very wide range of options enables almost any general lighting application.



Photo: BMLD, Barcelona

## MARS ARCHITECTURAL – Surface

NEW



### The versatile architectural lighting tool



True nano optics in four precise beam angles combined with an antiglare provide near invisible light and an UGR as low as <math>< 13</math>. An additional variant with an opal diffuser rounds off the options.



A multitude of options include several power levels and color temperatures plus options in tunable white and RGBW, as well as two form factors to choose from.



The surface-mounted luminaires are available in three housing and antiglare colors that can be freely combined. The type 62 also features magnetically fastened end caps to provide a clean finish.

NANO RAY

UGR <math>< 13</math>



INDOOR

FLEXIBLE LIGHT ENGINE

MIX & MATCH

DESIGN LUMINAIRES


APPENDIX




[www.led-linear.com/mars-arc-s](http://www.led-linear.com/mars-arc-s)

Technical Specifications

- White
- IO White
- Only MARS ARCHITECTURAL OPAL
- RGBW
- L80/B10 > 60,000 h
- IP40

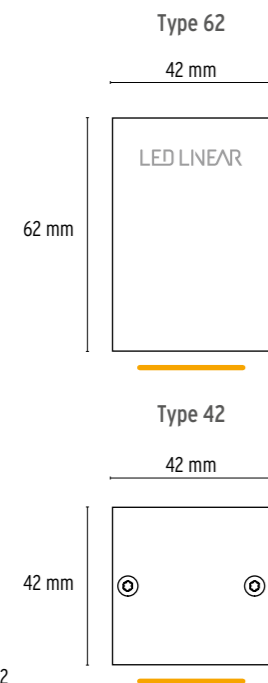


Scale: 1:2

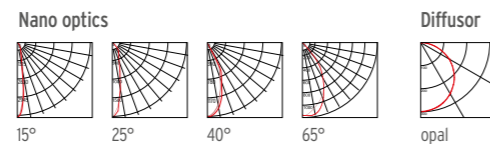

Cross section	42 mm x 62 mm (Type 62) / 42 mm x 42 mm (Type 42)
Length	345 mm - 3,020 mm
Power	15 W/m - 42 W/m
Luminous flux	up to 3,460 lm/m
Efficacy	up to 105 lm/W
Beam angle/optics	Nano optics: 15°, 25°, 40° or 65°/ Diffusor: Opal
Color temperatures	2,700 K, 3,000 K, 3,500 K and 4,000 K
Colors	Tunable White (2,200 K - 5,000 K), RGBW (only opal optics)
CRI	95 (except at 2,200 K and 5,000 K)

Mounting All dimensions in mm.

1 Surface-mounted, horizontal




Mounting accessories

No additional accessories are required for this mounting option.

Description

Simple installation by just screw the profile onto the ceiling thanks to pre-drilled holes.

Example of application

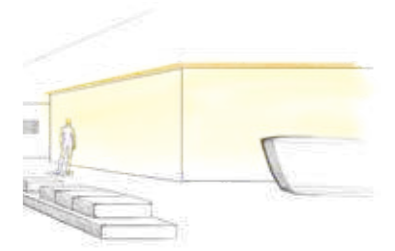

# XOOMINAIRE™ 4292 IP20 / IP40

The XOOMINAIRE™ family stands at crossroad of modularity and functionality embedded in aesthetic design. Each luminaire has its own driver on board (on/off or DALI) and can be easily mounted in continuous line as recessed, surface, pendant or wall luminaires.



## XOOMINAIRE™ 4292 IP20 / IP40




### Continuous light line system



Easy fixture to fixture mounting thanks to robust mechanical connectors and through wiring system.



Magnetic end caps and tight mechanical tolerances offering a screw-free for a clean finish while avoiding any light leaks.



High efficiency reflectors with excellent glare control (UGR < 16) for task lighting and wide beam opal cover for ambient lighting applications.



INDOOR

FLEXIBLE LIGHT ENGINE

MIX &amp; MATCH

DESIGN LUMINAIRES

APPENDIX

XOOMINAIRE™ 4292



XOOMINAIRE™ 4262



[www.led-linear.com/xoominaire-4292](http://www.led-linear.com/xoominaire-4292)




# XOOMINAIRE™ 4292 IP20 / IP40


## Technical Specifications



- White
- IO White on request
- L80/B10 > 60,000 h
- IP20/ IP40




Cross section	42 mm x 92 mm
Length	887 mm, 1,262 mm, 1,512 mm
Power	15 - 40 W/m
Luminous flux	<b>Direct:</b> HE 1,920 lm/m, HO 3,130 lm/m, SO 4,120 lm/m (opal cover) <b>Indirect:</b> 1,400 lm/m, 2,400 lm/m (diffuse cover)
Efficacy	up to 140 lm/W @ 65° optics
Beam angle/optics	opal, 25°, 65°
Color temperatures	2,700 K, 3,000 K, 3,500 K and 4,000 K
CRI	up to 86
Control	on/off, DALI

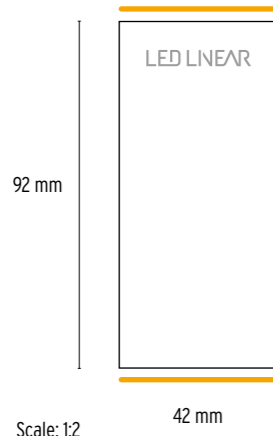



## Mounting All dimensions in mm.

### 1. Pendant



### Mounting accessories

-  VarioPendant 4292  
Art.-#: 13000107
-  VarioCANOPY Square Mounting set (optional) for pendant ceiling installations on concrete ceilings  
Art.-#: 16000347


### Description

Automatically delivered with luminaires.


### Example of application



### 2. Wall-mounted, horizontal



### Mounting accessories

-  Wall-mounting Set 4292  
Art.-#: 13000333

### Description

Automatically delivered with luminaires.


### Example of application





# XOOLUM™ Opal Continuous IP40

XOOLUM™ Opal Continuous can be used in any general lighting application that calls for an uninterrupted dotfree lightline. Thanks to many standard variants in static white (with a CRI of up to 98), as well as tunable white and RGBW it can fulfill any requirement for a continuous light line, be it surface or pendant mounted.

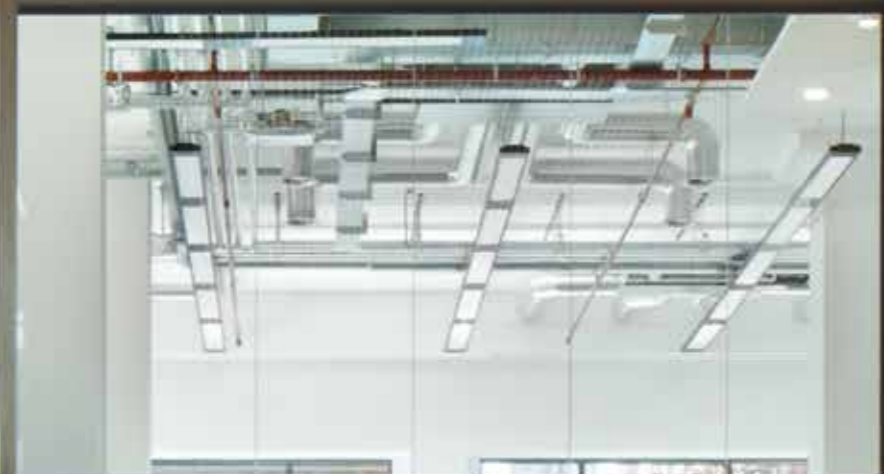

## XOOLUM™ Opal Continuous IP40



### Continuous uninterrupted dotfree lightlines



XOOLUM™ Opal Continuous allows uninterrupted dot free lightlines up to 15 m length.



High lumen output up to 2,560 lm/m in a minimalistic design make this luminaire a very good choice for general lighting.



XOOLUM™ Opal Continuous is available in three different variants of static white (with a CRI of up to 98), as well as color-tunable white and RGBW. It can be mounted on surfaces and as a pendant luminaire.



INDOOR

FLEXIBLE LIGHT ENGINE

MIX &amp; MATCH

DESIGN LUMINAIRES

APPENDIX



[www.led-linear.com/xolum](http://www.led-linear.com/xolum)




LED Linear™ GmbH


# XOOLUM™ Opal Continuous IP40

## Technical Specifications

- White
- IO White
- RGBW
- L80/B10 > 60,000 h
- IP40




Cross section	25.4 mm x 31 mm
Length	4,018 mm - 14,985 mm
Power	10 W/m - 42 W/m
Luminous flux	up to 2,410 lm/m
Efficacy	up to 74 lm/W
Beam angle/optics	Opal
Color temperatures	2,700 K, 3,000 K, 3,500 K and 4,000 K
Colors	Tunable White (HE 2,200 K - 4,000 K / HC 2,200 K - 5,000 K) and RGBW
CRI	85 - 96



## Mounting All dimensions in mm.

### 1. Surface-mounted, Opal continuous




#### Mounting accessories

No additional accessories are required for this mounting option.


#### Description

Special designed mounting profile for surface-mounting options. Holes have to be drilled at site.

#### Example of application

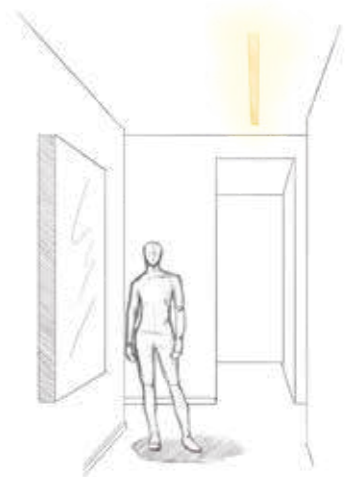

### 2. Pendant



#### Mounting accessories

-  VarioPendant 007 Slide Silver Art.-#: 13000157
-  VarioPendant 007 Slide Black Art.-#: 13000158
-  VarioCANOPY Square Mounting set (optional) for pendant ceiling installations on concrete ceilings Art.-#: 16000347

#### Description

Pendant set with screws for installations directly on the ceiling. 2 m Suspension is cuttable on site. Recommended to use every 1 m.

#### Example of application



# XOOLUM™ Reflector IP20

XOOLUM™ R convinces by its high efficiency and low glare optics which keeping a compact design.

Photo: Michael Conroy

## XOOLUM™ Reflector IP20



Impresses with high versatility and aluminum reflectors



High optical efficiency with a UGR < 16.



Modular mounting and lighting scenery thanks to its LEDs-Click™ technology enabling a 45° tilt of the luminaire head.



Appealing form factor of 25.4 mm by 31 mm which blends easily in any architectural concepts.





[www.led-linear.com/xoolumr](http://www.led-linear.com/xoolumr)

LED Linear™ GmbH

# XOOLUM™ Reflector IP20

## Technical Specifications


- White
- IQ White
- RGB
- L80/B10 > 60,000 h White / IQ White
- L80 > 30,000 h RGB
- IP20

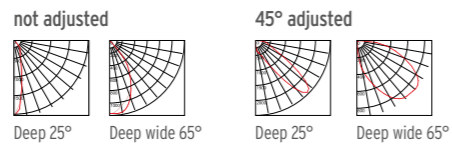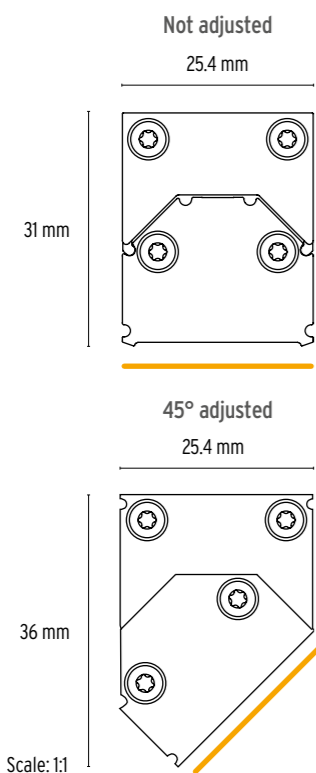



Cross section	25.4 mm x 31 mm / 25.4 mm x 36 mm
Length	135 mm - 4,010 mm
Power	5 W/m - 40 W/m
Luminous flux	340 lm/m - 3,710 lm/m
Efficacy	up to 126 lm/W
Beam angle/optics	Reflectors: 25°, 65°
Color temperatures	2,000 K, 2,200 K, 2,500 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K and 5,000 K
Colors	Tunable White (HE: 2,500 K - 4,000 K / HC: 2,200 K - 5,000 K / UHC: 2,700 K - 6,500 K), RGB
CRI	85 - 96

## Mounting All dimensions in mm.
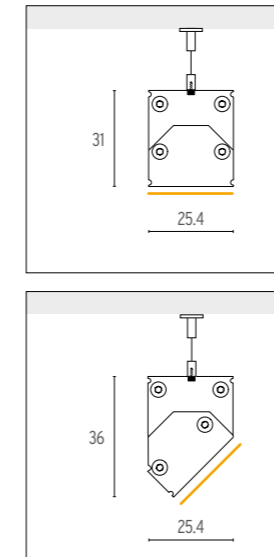
### 1. Pendant



### Mounting accessories

-  VarioPendant 007 Slide Silver  
Art.-#: 13000157
-  VarioPendant 007 Slide Black  
Art.-#: 13000158
-  VarioCANOPY Square Mounting set (optional) for pendant ceiling installations on concrete ceilings  
Art.-#: 16000347


### Description

Pendant set with screws for installations directly on the ceiling. 2 m Suspension is cuttable on site. Recommended to use two suspensions per meter.

### Example of application



### 2. Surface-mounted, fixed

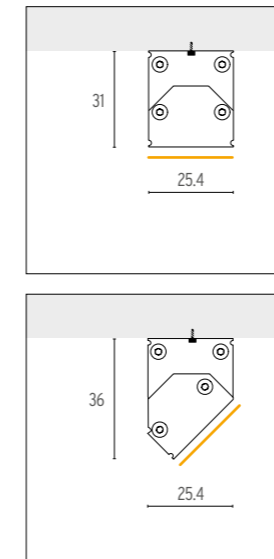


### Mounting accessories

No additional accessories are required for this mounting option.


### Description

Special designed mounting profile for surface-mounting options. Holes have to be drilled at site.

### Example of application

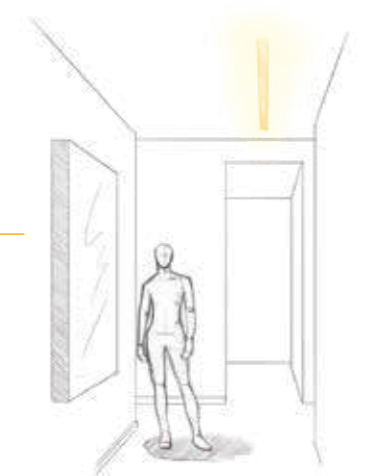

### 3. Surface-mounted, adjustable

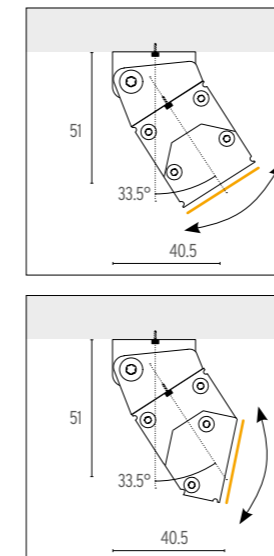

### Mounting accessories

-  XOOLUM™ 007 Swivel-Angle Set +/- 45°  
Art.-#: 13000081

### Description

Adjustable clip for extra 45° tilt.

# COVE

Lighting system optimized for soft cove lighting effect and tool-free installation.

Further lighting solutions for cove can be configured in the allrounder section or flexible light engine (Tape) and Profol and Cover System (Mix & Match).

XOOLINE HYDRA White IP40 | Seite 122



## XOOCOVE IP40 | Page 170

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
5 - 25	330 - 2,950	85 - 96	2,000 - 5,000	260 - 2,510

XOOCOVE is a quality solution for cove applications with minimal form factor with 360° adjustability. Thanks to the silicone pad, it is quick and easy to install.



# XOOCOVE IP40

The luminaire is great to use for any cove solution and offers a homogeneous light distribution with an output up to 2,950 lm/m. It is possible to adjust the beam angle 360 degrees, increasing the flexibility of the fixture. XOOCOVE is designed with an LD tape to increase efficiency and due to the fact that cove solutions disable a direct view of the luminaire.



Photo: Andy Stagg

## XOOCOVE IP40



### The convenient system to master cove applications



The silicone pads are placed in the cove, followed by the fixture. This enables an installation where the luminaire can be rotated in 360° without the use of any tool.



A piercing connector enables installation where multiple luminaires are attached to one 24 V bus cable. The cables are then placed in the silicone pads groove for clean cable management.



Available with diffuse cover or linear lens and translucent end caps increase cove homogeneity by prohibiting light gaps and dark spots.



[www.led-linear.com/xoocove](http://www.led-linear.com/xoocove)

LED Linear™ GmbH

# XOOCOVE IP40

## Technical Specifications

- White
- IO White
- L80/B10 > 60,000 h
- IP40




<p>13.1 mm</p> <p>20 mm</p>	<p><b>Linear lens</b></p> <p>60°</p>	<p><b>Round cover</b></p> <p>diffuse</p>																
<table border="0"> <tr> <td>Cross section</td> <td>20 mm diameter</td> </tr> <tr> <td>Length</td> <td>up to 2,510 mm</td> </tr> <tr> <td>Power</td> <td>5 W/m - 25 W/m</td> </tr> <tr> <td>Luminous flux</td> <td>up to 2,950 lm/m</td> </tr> <tr> <td>Efficacy</td> <td>up to 121 lm/W</td> </tr> <tr> <td>Beam angle/optics</td> <td>60° or 120° (diffuse)</td> </tr> <tr> <td>Color temperatures</td> <td>2,000 K, 2,200 K, 2,500 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K and 5,000 K</td> </tr> <tr> <td>CRI</td> <td>85 - 96</td> </tr> </table>			Cross section	20 mm diameter	Length	up to 2,510 mm	Power	5 W/m - 25 W/m	Luminous flux	up to 2,950 lm/m	Efficacy	up to 121 lm/W	Beam angle/optics	60° or 120° (diffuse)	Color temperatures	2,000 K, 2,200 K, 2,500 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K and 5,000 K	CRI	85 - 96
Cross section	20 mm diameter																	
Length	up to 2,510 mm																	
Power	5 W/m - 25 W/m																	
Luminous flux	up to 2,950 lm/m																	
Efficacy	up to 121 lm/W																	
Beam angle/optics	60° or 120° (diffuse)																	
Color temperatures	2,000 K, 2,200 K, 2,500 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K and 5,000 K																	
CRI	85 - 96																	

Scale: 1:1

## Mounting All dimensions in mm.

### 1. Tool-free cove mounting



### Mounting accessories




### Description

Totally tool free installation of silicon mounting pad, 2 pads per meter are recommended


### Example of application



### 2. Fastened cove mounting




### Mounting accessories



### Description

Plastic mounting clips with special cable groove on the side to simplify the wiring. Recommended to use 2 per meter



# WALL WASH

Slim and discrete surface mount wall-washer using a specular aluminum reflector tilted by 45° making the light source disappearing.



XOOLUM™ R WW IP20 | Page 160



## MARS Wall Wash IP20 | Page 176

Power (W)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
8 - 46	350 - 3,490	90	2,200 - 5,000	180 - 980

MARS Wall Wash is a high end wall washer with a possible lumen output of 3,490 lm/m combined with a color temperature ranging between 2,200 K to 5,000 K.



## XOOLUM™ Reflector Wall Wash IP20 | Page 180

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
5 - 40	350 - 3,770	85 - 98	2,000 - 5,000	135 - 4,010

Surface mount wall washer with small form factor using specular reflector offering a variety of lumen outputs from 350 lm/m up to 3,770 lm/m and CCTs.





# MARS Wall Wash IP20

MARS Wall Wash IP20 is a luminaire designed at its core for wall washing applications. A minimalistic and tight design adds aesthetical dimensions to any project and enables installations close to the illuminated target.



## MARS Wall Wash IP20



Light where it is meant to be



MARS Wall Wash is equipped with Bartenbach reflectors which enable a precise cut off and perfect homogeneity.



Outstanding CRI up to 90 and low glare.



Minimally invasive (only 10 mm) and possibility to install close to the target.



INDOOR

FLEXIBLE LIGHT ENGINE

MIX &amp; MATCH

DESIGN LUMINAIRES


APPENDIX



# MARS Wall Wash IP20

## Technical Specifications


- White
- IO White
- L80/B10 > 60,000 h
- IP20

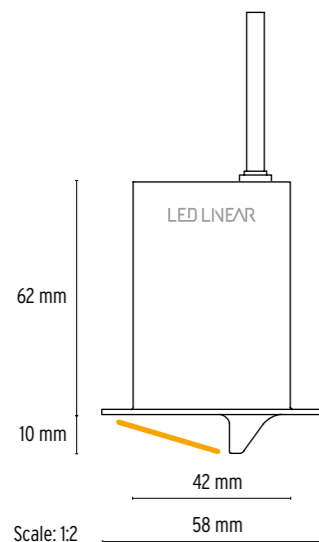


Cross section	42 mm x 72 mm
Length	180 mm - 980 mm
Power	8 W - 46 W
Luminous flux	up to 3,490 lm/m (Tunable White: up to 3,970 lm/m)
Efficacy	90 lm/W
Beam angle/optics	Wall wash
Color temperatures	2,200 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K and 5,000 K
Colors	Tunable White (2,200 K - 4,000 K)
CRI	up to 90

## Mounting All dimensions in mm.

### 1. Recessed




### Mounting accessories




### Description

Pre-drilled holes on the backside of the profile for a simple screw connection between clamp and profile.

### Example of application

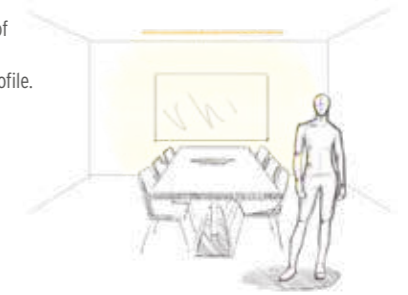

### 2. Surface-mounted, horizontal



### Mounting accessories

No additional accessories are required for this mounting option.


### Description

Simple installation by just screw the profile onto the ceiling thanks to pre-drilled holes.


### Example of application



### 3. Pendant



### Mounting accessories

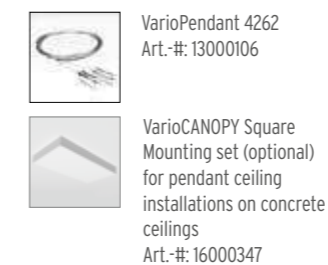

### Description

Pendant set with 2 m wire. Recommended to use two times a meter.

### Example of application



# XOOLUM™ Reflector Wall Wash IP20

Slim and discrete surface mount wall-washer using a specular aluminum reflector tilted by 45° making the light source disappearing.



## XOOLUM™ Reflector Wall Wash IP20



### Smart solution for invisible wall washing



Aluminum reflector technology for an excellent color mixing and homogeneous wall wash effect.



Large offer of lumen outputs and CCTs with an outstanding efficiency of 94%.



Compact design and simple surface mounting enabling a discrete installation in the ceiling.




[www.led-linear.com/xoolumr](http://www.led-linear.com/xoolumr)

LED Linear™ GmbH

# XOOLUM™ Reflector Wall Wash IP20

## Technical Specifications


- White
- IQ White
- RGB
- L80/B10 > 60,000 h
- L80 > 30,000 h
- IP20

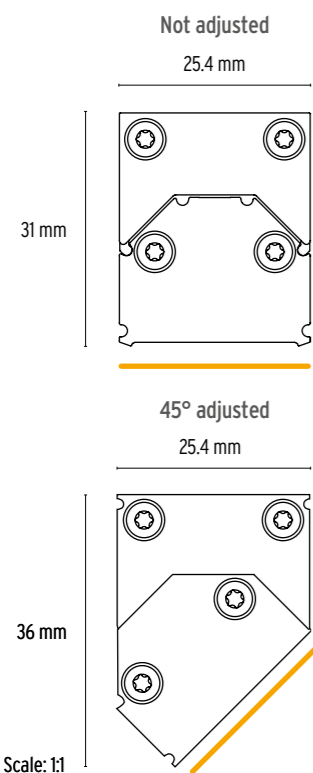

Cross section	25.4 mm x 36 mm
Length	135 mm - 4, 010 mm
Power	5 W/m - 40 W/m
Luminous flux	350 lm/m - 3,770 lm/m
Efficacy	up to 128 lm/W
Beam angle/optics	Wall Wash
Color temperatures	2,000 K, 2,200 K, 2,500 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K and 5,000 K
Colors	Tunable White (HE: 2.500 K - 4.000 K, HC: 2.200 K - 5.000 K), RGB
CRI	up to 96

## Mounting All dimensions in mm.

### 1. Pendant

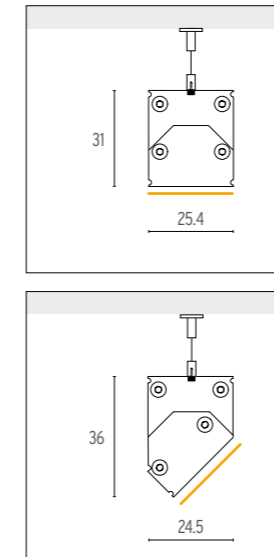

### Mounting accessories

-  VarioPendant 007 Slide Silver Art.-#: 13000157
-  VarioPendant 007 Slide Black Art.-#: 13000158
-  VarioCANOPY Square Mounting set (optional) for pendant ceiling installations on concrete ceilings Art.-#: 16000347


### Description

Pendant set with screws for installations directly on the ceiling. 2 m Suspension is cuttable on site. Recommended to use two suspensions per meter.

### Example of application



### 2. Surface-mounted, fixed

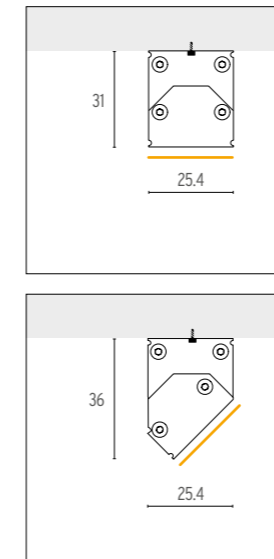


### Mounting accessories

No additional accessories are required for this mounting option.


### Description

Special designed mounting profile for surface-mounting options. Holes have to be drilled at site.

### Example of application

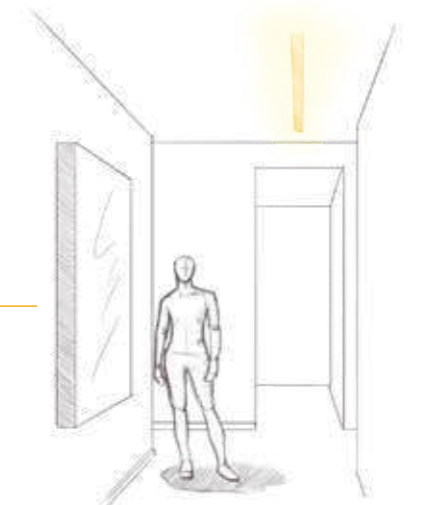

### 3. Surface-mounted, adjustable

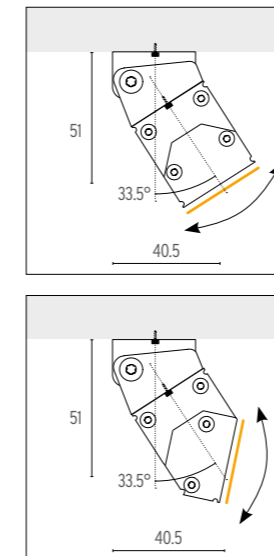

### Mounting accessories

-  XOOLUM™ 007 Swivel-Angle Set +/- 45° Art.-#: 13000081

### Description

Adjustable clip for extra 45° tilt.

# IN-GROUND

Luminaires installed in robust in-ground channel for installation in concrete, wood, ceramic or carpet floors with drainage compartment and water outlet.

ADONIS White | Page 166

Photo: Jin Hosoya



ADONIS | Page 186

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
6 - 36	240 - 2,620	85 - 96	1,900 - 4,500	639 - 1,827

Opal encapsulated dot free, compact and robust that is a rigid equivalent to VENUS with cable groove on its backside. It fascinates with a simple installation with internal mounting clips for recessed or surface-mount without visible light joints and connections.



KALYPSO | Page 190

Power (W/m)	Luminous flux (lm/m)	CRI	CCT (Kelvin)	Length (mm)
6 - 36	390 - 4,290	85 - 96	2,000 - 5,000	639 - 1,827

Clear encapsulation in combination with three optics options (10°, 30°, 60°) for grazing applications. KALYPSO is designed with a cable groove that makes it possible to install the fixture without cables and clips disturbing the finish.



# ADONIS

ADONIS is a minimalistic linear luminaire suitable for facade, ceiling direct view applications. A possible output of 2,620 lm/m combined with CCTs ranging between 1,900 K to 4,500 K makes ADONIS a multifunctional luminaire.

Photo: Akito Goto/ goto photo office

## ADONIS



### Dot free rigid linear LED line



High protection against vandalism thanks to a robust, powder-coated aluminum profile with an IK10 rating.



Polyurethane is utilized in ADONIS to make it more resistant to impact from salt water UV-light and solvents.



A special chamber for the water management and drainage option for end caps.



[www.led-linear.com/adonis](http://www.led-linear.com/adonis)


LED Linear™ GmbH

- White
- IQ White
- RGB
- L80/B10 > 60,000 h White / IQ White
- L80 > 30,000 h RGB








### Mounting All dimensions in mm.

#### 1. In-ground (only indoor)



#### Mounting accessories

-  VarioContour 010 Inground Channel (for indoor installation only)  
Art.-#: 10000576-RAL9003-FS  
10000576-RAL9003-1m
-  Inground Channel End cap Set w/o Nozzle  
Art.-#: 11000231
-  VarioContour 010 Inground Channel, Clip Set  
Art.-#: 13000288
-  Inground Channel End cap Set w Nozzle  
Art.-#: 11000232
-  IP67 Disassembly Tool  
Art.-#: 13100032

#### Description

Powder-coated indoor in-ground channel. End caps required to cover the ends of the in-ground channel before installation. Available with or without drainage nozzle.


#### Example of application



Use to take the fixture out of the in-ground mounting frame.



Cross section	20.5 mm x 25.5 mm
Length	639 mm, 952 mm, 1,264 mm, 1,514 mm, 1,827 mm
Power	6 W/m - 36 W/m
Luminous flux	up to 2,620 lm/m
Efficacy	up to 73 lm/W
Beam angle/optics	120°
Color temperatures	1,900 K, 2,100 K, 2,300 K, 2,500 K, 2,800 K, 3,200 K, 3,700 K and 4,500 K
Colors	Tunable White (2,100 K - 4,500 K), RGB
CRI	up to 96



# KALYPSO

KALYPSO is a minimalistic luminaire suitable for wall grazing. Due to its three optics and its IP67 rating, a high range of opportunities is covered. A maximum output of 4,290 lm/m combined with a CCT ranging between 2,000 K to 5,000 K makes KALYPSO a multifunctional luminaire.

Photo: Andrew Worssam

# KALYPSO



## Encapsulated linear LED luminaire with linear lenses



High lumen output in minimalistic design with a small cross section of (W x H) 20.5 mm x 25.5 mm



Screwed diffuse end caps for an optimal sealing at both ends of the luminaire.



A special chamber for the water management and drainage option for end caps.



[www.led-linear.com/kalypso](http://www.led-linear.com/kalypso)


LED Linear™ GmbH




# KALYPSO

## Technical Specifications

- White
- IO White
- L80/B10 > 60,000 h
- RGB
- RGBW
- L80 > 30,000 h




Cross section	20.5 mm x 25.5 mm
Length	639 mm, 952 mm, 1,264 mm, 1,514 mm, 1,827 mm
Power	6 W/m - 36 W/m
Luminous flux	up to 4,290 lm/m
Efficacy	121 lm/W
Beam angle/optics	10°, 30°, 60°
Color temperatures	2,000 K, 2,200 K, 2,500 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K and 5,000 K
Colors	Tunable White (2,200 K - 5,000 K), RGB, RGBW
CRI	85 - 96








## Mounting All dimensions in mm.

### 1. In-ground (only indoor)




### Mounting accessories

-  VarioContour 010 Inground Channel (for indoor installation only) Art.-#: 10000576-RAL9003-FS 10000576-RAL9003-1m
-  Inground Channel End cap Set w/o Nozzle Art.-#: 11000231
-  VarioContour 010 Inground Channel, Clip Set Art.-#: 13000288
-  Inground Channel End cap Set w Nozzle Art.-#: 11000232
-  IP67 Disassembly Tool Art.-#: 13100032

### Description

Metal end caps with screws and rubber gasket. Required to cover the ends of the inground channel before installation. Available with or without drainage outlet.

### Example of application

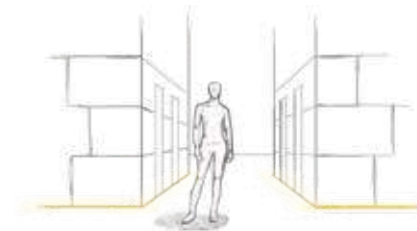

Use to take the fixture out of the in-ground mounting frame.

# FLEXIBLE LIGHT ENGINE

The core of LED Linear™ technology.

A collection of static white, tunable white and color dynamic solutions produced in Germany with cutting edge components and production line technologies.

The tape can be found in our luminaires or can be easily combined with LED Linear™ profile and cover system, Mix & Match, to address any linear lighting application.

## 296 | LED LINEAR™ TECHNOLOGY

State-of-the-art from design to production.

## 298 | FLEX LED TAPE STATIC WHITE

With numerous CCT, output levels and with various color rendition performances up to CRI 98. HYDRA PRO, HYDRA EXL, LUMINARIS ECO, VarioLED™ Flex SOL, VarioLED™ Flex LINUS

## 200 | FLEX LED TAPE TUNABLE WHITE

Versatile light source offering high efficiency and reliability. Ideal for applications requiring excellent color rendition and large tuning range. VarioLED™ Flex IQ White SOL, VarioLED™ Flex IQ White NEXUS, VarioLED™ Flex IQ White HYDRA

## 202 | FLEX LED TAPE RGBW, RGB & STATIC COLOR


Available with several CCT spans and color rendition. Ideal for color dynamic application with excellent color rendition and high power levels. VarioLED™ Flex RGBW, VarioLED™ Flex RGB, VarioLED™ Flex ECO Color P12

## 204 | APPLICATIONS – OVERVIEW

Examples of application types for every flexible light engine.

# LED LINEAR™ TECHNOLOGY

## High quality components & smart design

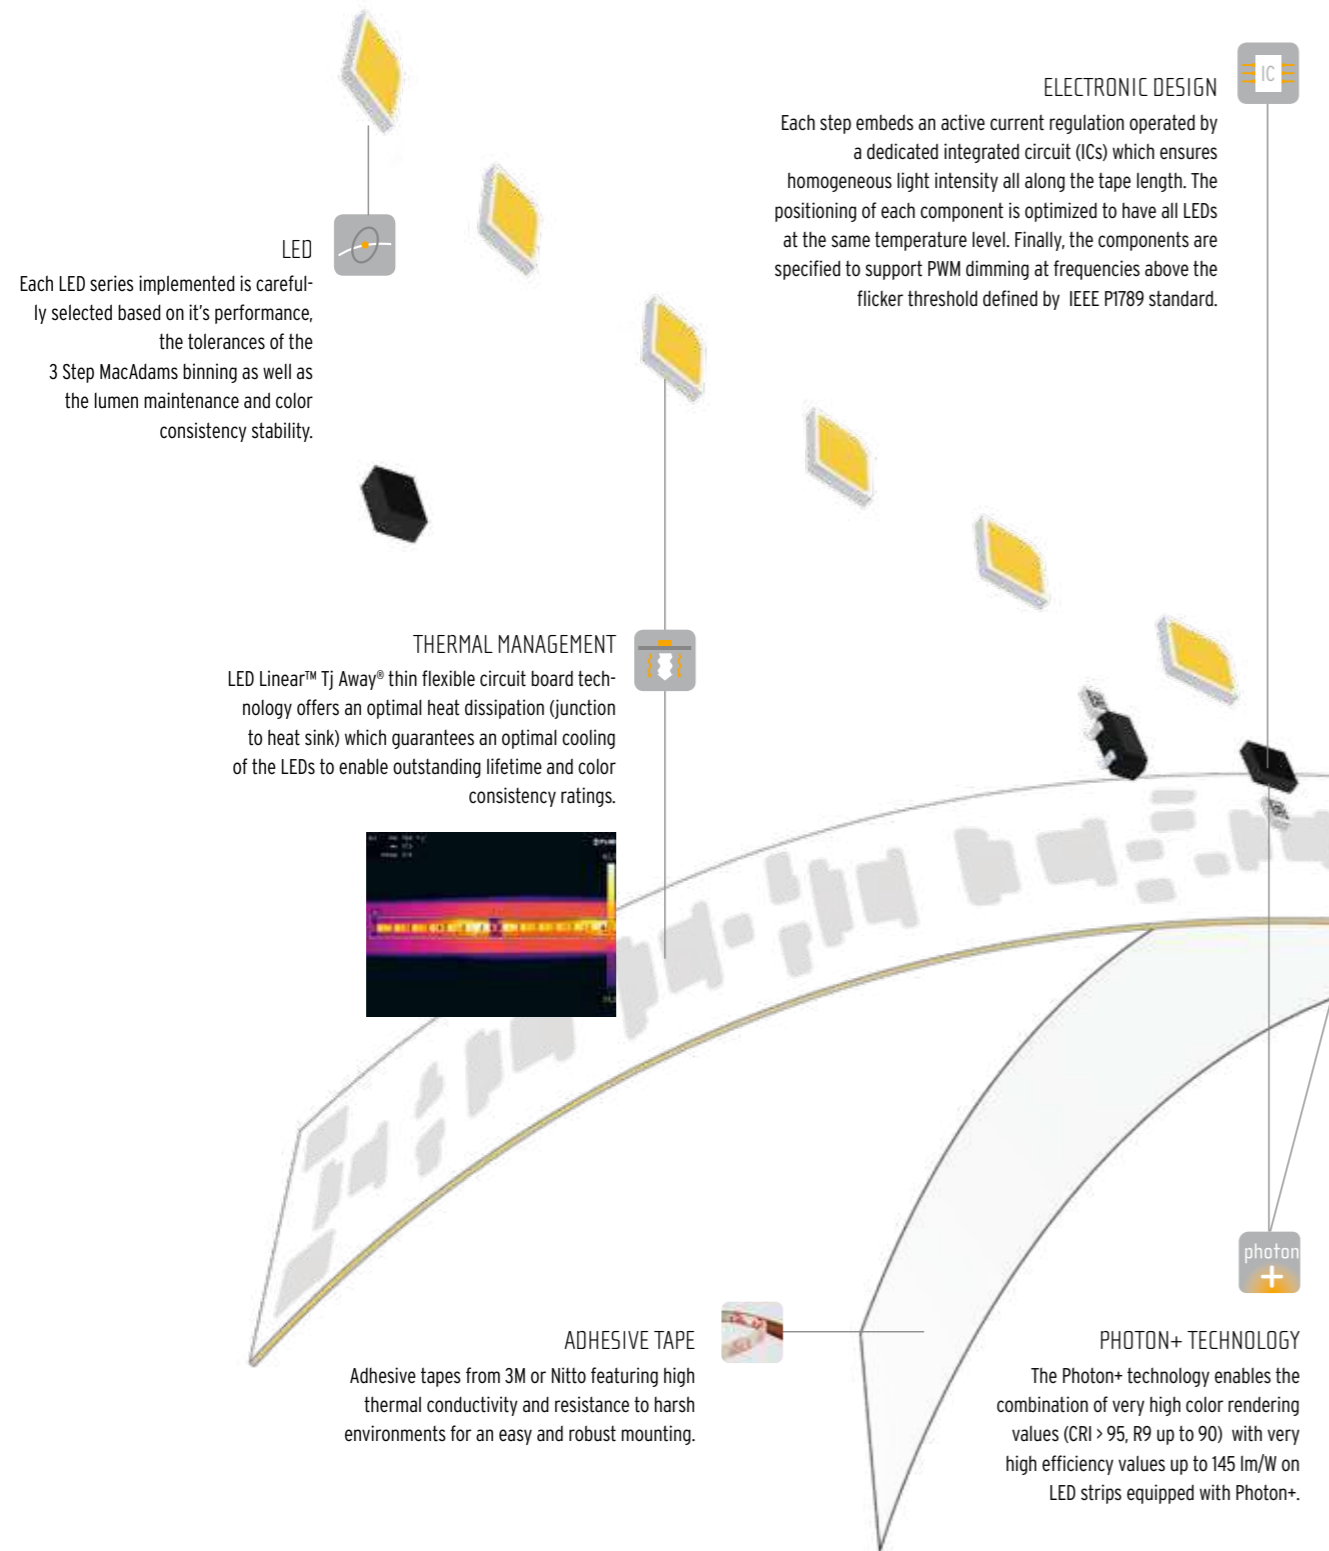

## Automated production and quality control

**REEL TO REEL (R2R) PRODUCTION**  
All the components are assembled using state of the art Reel to Reel (R2R) automated production lines installed at LED Linear's production site in Germany.

**AUTOMATED IN-LINE TEST**  
Several electrical and visual automated tests are performed in order to ensure the quality of each solder points and the accuracy of the components position.


**TRACEABILITY**  
Each production lot receives a unique QR-code linked to a database enabling full transparency on the production date and time and components batch.

# FLEX LED TAPE – STATIC WHITE



## HYDRA EXL SW NEW

As the latest generation of our single-channel and dimmable 24 V constant voltage LED strips, the HYDRA EXL series sets new standards in efficiency for indoor LED tapes. Equipped with the latest generation of high-quality Japanese 3030 LEDs, which in combination with our new "Photon + tbd" technology, offer very high efficiency combined with very high color rendering.

Consistent with the previous HYDRA generation, our top features such as OneBinOnly, Tj Away™ and the production in the most modern Reel-to-Reel (R2R) technology remain in an improved form in the HYDRA EXL series, which leads to an improved lifetime of the HYDRA EXL series from L90B10 > 60,000 hrs.

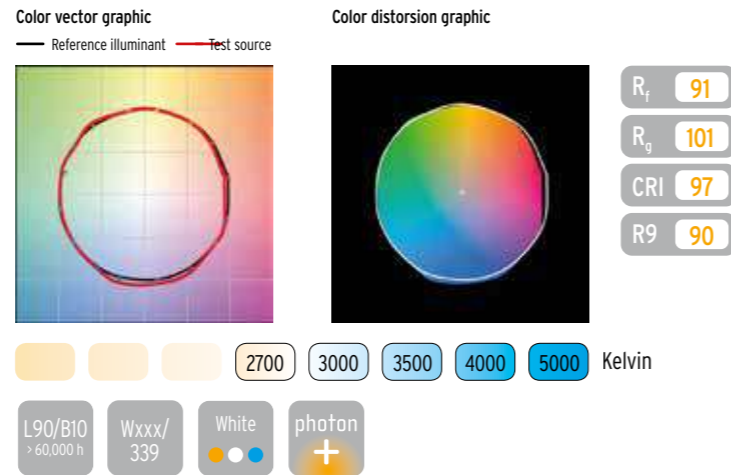

EXL - Excellence / 8.93 mm LED pitch

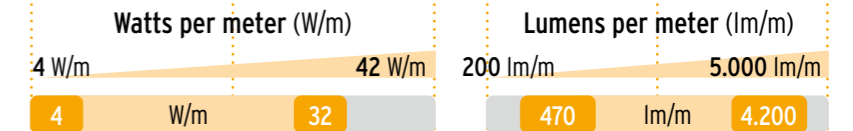



## HYDRA PRO SW NEW

Our new HYDRA PRO series includes single-channel, dimmable strips for constant voltage, based on the improved successful technologies of the previous model (OneBinOnly, Tj Away™, Reel-2-Reel production).

All HYDRA PRO series tapes are equipped with a high quality double sided adhesive tape on the back.



PRO - Professional / 8.93 mm LED pitch




## LUMINARIS ECO



2835 LEDs - Cost efficient solution for cove.  
Cost-effective solution for simple applications.



P23 - 23 mm LED-Abstand



P12 - 12 mm LED-Abstand

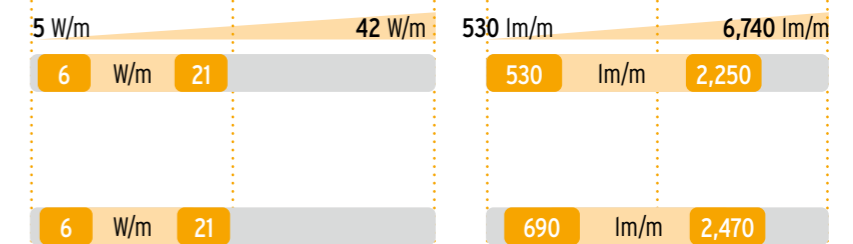

## VarioLED™ Flex SOL


Award winning full spectrum LEDs providing the industry's closest match to both the sun and incandescent spectrums - Ideal for applications requiring outstanding color rendition or Human Centric Lighting (HCL).



LD - Low density / 17.86 mm LED pitch



HD - High density / 8.93 mm LED pitch


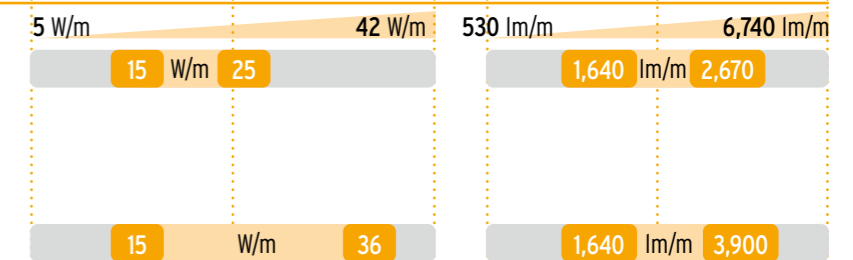


## VarioLED™ Flex LINUS

High color rendition 3030 LEDs with tight pitch and short cut length. Perfect for applications where lighting quality is of great importance, good price/performance ratio.



HD - High density / 8.3 mm LED pitch



# FLEX LED TAPE – TUNABLE WHITE

## VarioLED™ Flex IQ White SOL

Award winning full spectrum LEDs providing the industry's closest match to both the sun and incandescent spectrums - Ideal for applications requiring outstanding color rendition and large CCT tuning range.

CRI **98**

R9 **95**



L80/B10 > 60,000 h  
Wxxx/ 339  
IQ White

## VarioLED™ Flex IQ White NEXUS

Chip Scale Package (CSP) LEDs with outstanding thermal and color over angle performances - Ideal for applications requiring excellent color rendition and large tuning range.

CRI **85**

R9 **71**



L80/B10 > 60,000 h  
Wxxx/ 339  
IQ White

## VarioLED™ Flex IQ White HYDRA

High quality 3030 package LEDs for the LD version and 2016 package for the HD version. Versatile light source offering high efficiency and reliability. Ideal for applications requiring a tuning span close to the Planckian locus.

CRI **95**


R9 **76**



L80/B10 > 60,000 h  
Wxxx/ 339  
IQ White


Watts per meter (W/m) 5 W/m to 42 W/m  
Lumens per meter (lm/m) 530 lm/m to 5,240 lm/m

LD - Low density / 17.86 mm LED pitch




20 W/m 2,120 lm/m

LD - Low density / 17.86 mm LED pitch



HD - High density / 8.93 mm LED pitch




5 W/m 42 W/m 530 lm/m 5,240 lm/m  
40 W/m 3,940 lm/m  
12 W/m 42 W/m 1,310 lm/m 4,880 lm/m

LD - Low density / 17.86 mm LED pitch



HD - High density / 8.93 mm LED pitch



5 W/m 42 W/m 530 lm/m 5,240 lm/m  
25 W/m 3,010 lm/m  
12 W/m 24 W/m 1,290 lm/m 2,760 lm/m

# FLEX LED TAPE – RGBW, RGB & STATIC COLOR



## VarioLED™ Flex RGBW

High-end Japanese RGB LEDs combined with white CSP LEDs - Ideal for color dynamic application (Dim to Warm, pastel tones, etc.) with excellent color rendition and high power levels.



CRI **95**  
R9 **85**



L90/B10 > 60,000 h  
L80 > 30,000 h  
RGBW

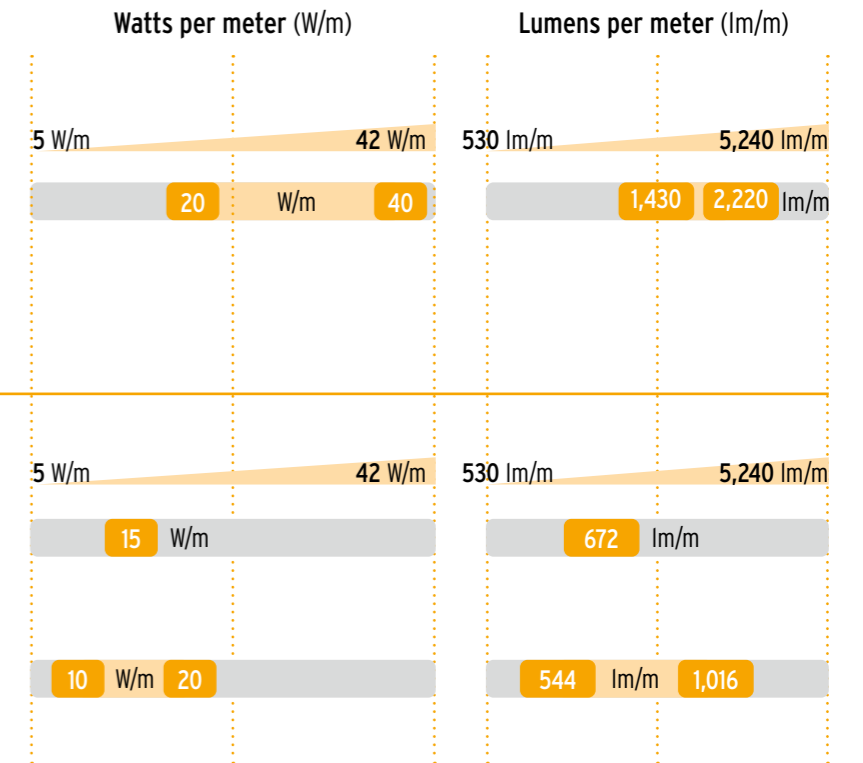

## VarioLED™ Flex RGB

High-end Japanese RGB LEDs - Ideal for decorative color dynamic applications.



L80 > 30,000 h  
RGB

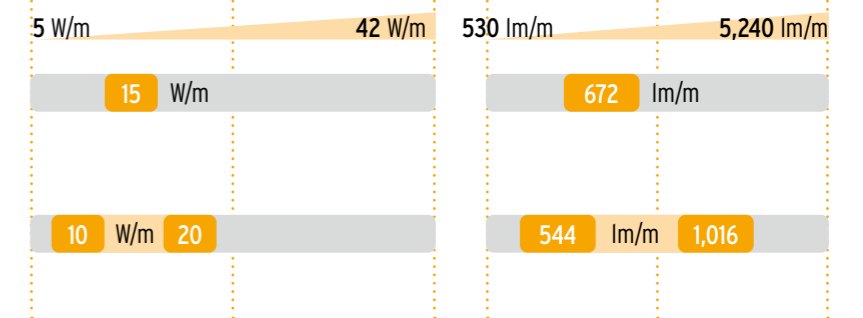

## VarioLED™ Flex ECO Color P12

Quality 2835 LED package for static color provides atmospheric light and color accents for every application. Three color options red, green and blue high quality mono tapes.

L80/B10 > 50,000 h  
Wxxx/339  
Color

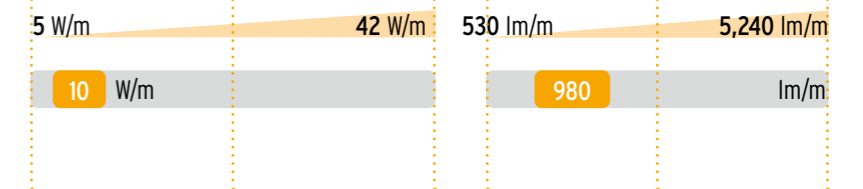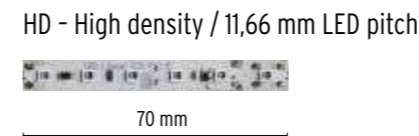

# APPLICATIONS – OVERVIEW

		General Lighting (direct)	Cove Lighting (indirect)	Decorative Lighting	Task Lighting	Retail	Furniture Lighting	Museum	Food	Outdoor (IP67)
		Functional and homogeneous lighting fixture	Low density pitch homogeneous light output	Option to adjust the color temperature to different scenarios	Higher color rendering and homogeneous light output	Good color rendering with option to adjust the color temperature to different scenarios	High color rendering and high density pitch to adjust the length to the furniture	Excellent color rendering for the artwork and option the create different moods	Great color rendering to stage the food	Option to have the tape encapsulated
STATIC WHITE	HYDRA EXL SW <span style="background-color: orange; color: white; padding: 2px;">NEW</span>	✓			✓	✓	✓	✓	✓	✓
	HYDRA PRO SW <span style="background-color: orange; color: white; padding: 2px;">NEW</span>	✓			✓	✓	✓		✓	✓
	LUMINARIS ECO P23		✓			✓				
	LUMINARIS ECO P12		✓		✓	✓				
	VarioLED™ Flex SOL LD		✓						✓	✓
	VarioLED™ Flex SOL HD	✓			✓		✓	✓		
	VarioLED™ Flex LINUS+ HD	✓			✓	✓	✓		✓	✓
TUNABLE WHITE	VarioLED™ Flex IQ White SOL LD		✓	✓				✓	✓	
	VarioLED™ Flex IQ White NEXUS LD		✓	✓		✓		✓	✓	
	VarioLED™ Flex IQ White NEXUS HD	✓		✓	✓	✓	✓	✓		
	VarioLED™ Flex IQ White HYDRA LD		✓	✓						✓
	VarioLED™ Flex IQ White HYDRA HD		✓	✓						✓
RGBW	VarioLED™ Flex RGBW HD	✓	✓	✓			✓			
RGB	VarioLED™ Flex RGB LD		✓	✓						✓
	VarioLED™ Flex RGB HD	✓		✓			✓			✓
STATIC COLOR	VarioLED™ Flex ECO Color P12		✓	✓						✓

FLEXIBLE LIGHT ENGINE

MIX & MATCH

DESIGN LUMINAIRES

APPENDIX

# MIX & MATCH

TAPE - PROFILE - COVER - MOUNTING - ACCESSORIES

Mix & Match complement LED Linears premium lighting solution by offering a DIY tool box which enables the integration of LED tapes in user defined luminaires. A large range of small and yet functional profile, covers and mounting options allows the configuration of individual luminaires to suit perfectly the desired application.

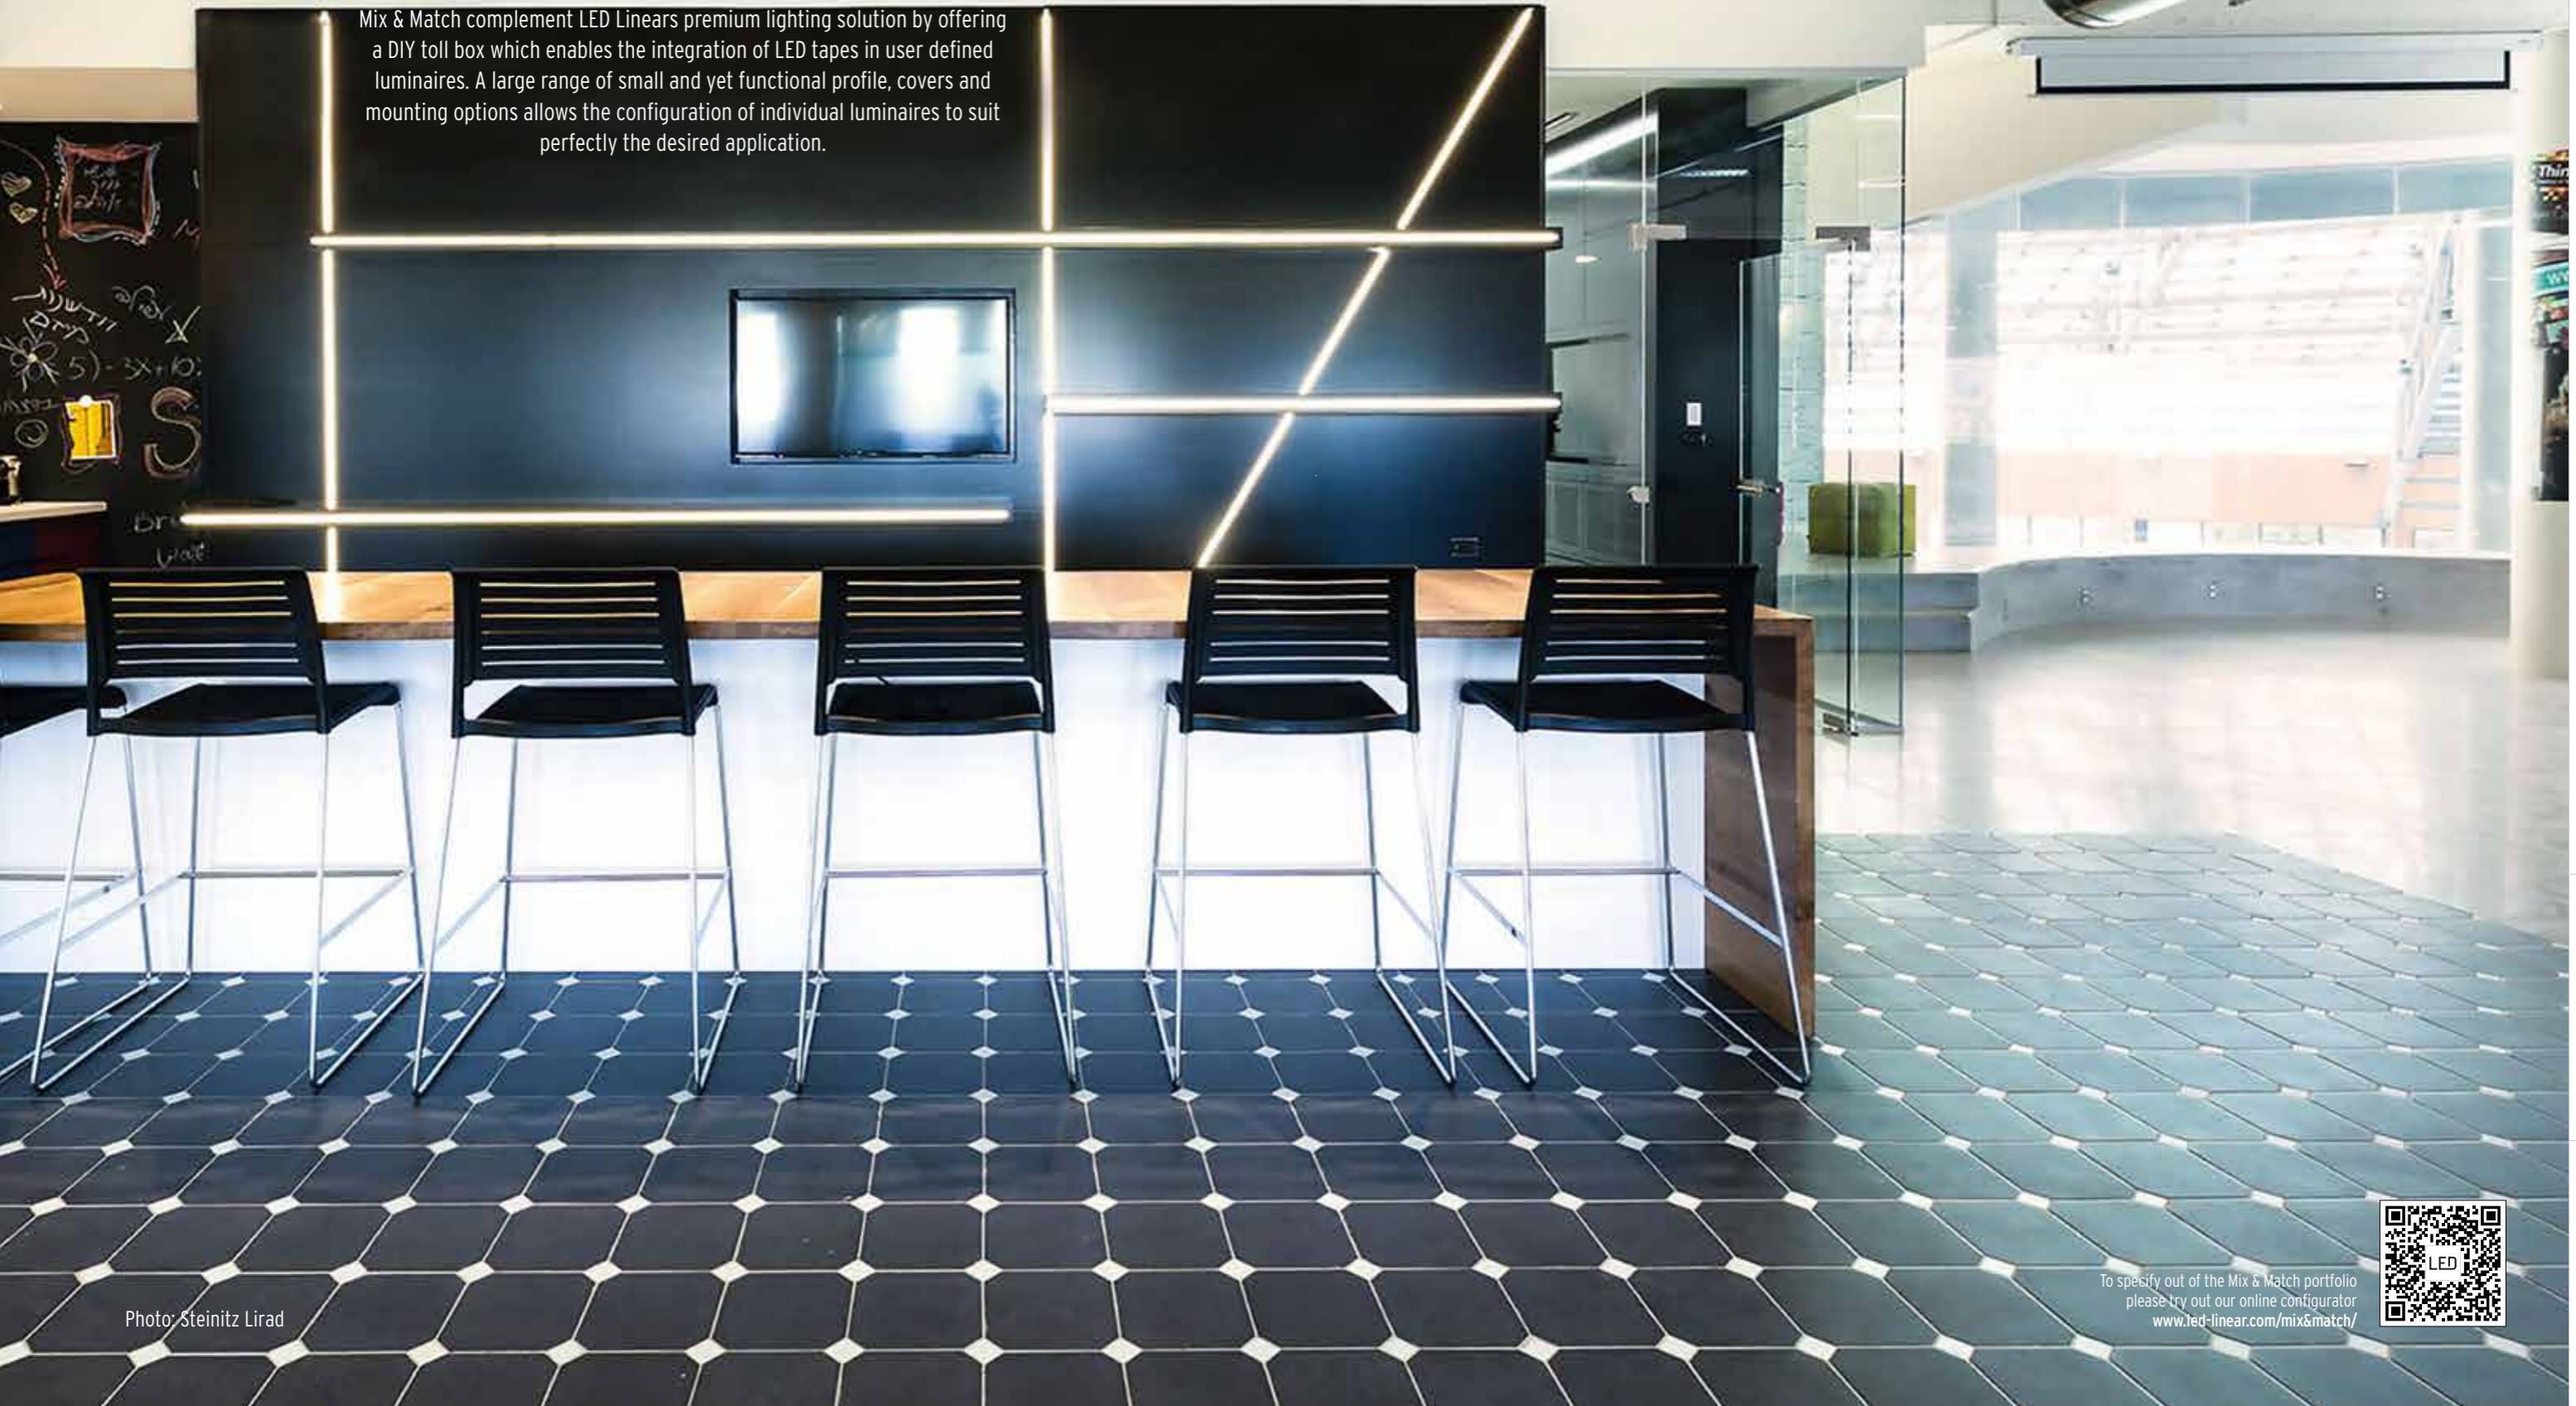


Photo: Steinitz Lirad

To specify out of the Mix & Match portfolio  
please try out our online configurator  
[www.led-linear.com/mix&match/](http://www.led-linear.com/mix&match/)






# MIX & MATCH

## Tape - Profile - Cover - Mounting - Accessories

This portfolio offers over 600,000 possible combinations. For example indirect and direct lighting, corner and shelf lighting, or recessed lighting. The delivery as Do It Yourself Kit in standard lengths to be cut on site makes this portfolio even more flexible and individual. With our new configurator you can start where you want to configure your own lighting fixture.

The light is with you!

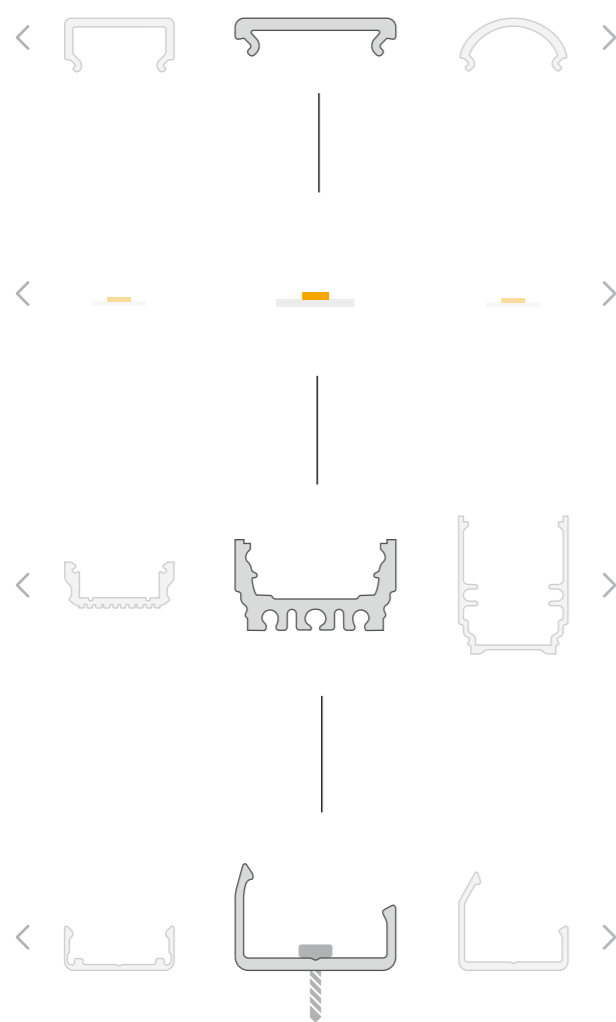

### COVER

You can choose between different cover forms - Round, High<sup>2</sup>, Low<sup>2</sup> in opal for wide beam spread and homogenous light lines or diffuse for indirect lighting or higher efficiency.

### LED TAPE

Choose among the large range of LED Linear's state of the art LED tape portfolio: VarioLED™ Flex or LUMINARIS ECO.

### PROFILE

A new range of highly functional aluminum profiles with high tolerances for a clean design and a nice finish, in combination with LED Linear's Tj Away®, an optimal heat management to achieve durable luminaires.

### MOUNTING

To enable flexibility and individuality in the combinations multiple mounting options are available for each profile to address multiple types of mounting and applications.





VarioContour  
VarioCover  
VarioClip

## VarioContour 1907-R

19 mm Width

7 mm Height



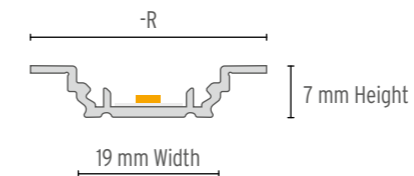

Recessed Profil  
or  
Additional information  
about Cover or Clips



To provide easy access and understanding of the possible combinations of different parts, the term contains a lot of information. The first numbers provide information about the width of the cover, the profile or mounting accessories and indicate whether the parts fit together.

This system gives us different product lines that can be freely combined with their covers and clips. An overview can be found on the following page.

# PORTFOLIO OVERVIEW

COVER		PROFILE			MOUNTING															
Opal	Diffuse	VarioContour	Article number	Max. Wattage W/m	10000039-2m (Profile)	10000040-15D	10000040-30D	10000040-45D	13000032	13000319	10000500	13000320	10000580-W	10000534	10000597-SCH	13000318	13000316	13000315	18200128	
					10000040 (Clip)	19 0°	19 15°	19 30°	19 45°	19 Plastic	19 Wall-Mount	19 60°	1907-R Corner	1508 Trimless DRY	1508 PVC	1512-R Mounting Spring	1508 0°	12 0°	12 0° Cone	Adhesive Tape
					Recessed	Recessed	Recessed	Recessed	Recessed	Surface	Surface	Surface	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed	
					Surface	Surface	Surface	Surface	Surface	Surface	Surface	Surface	Surface	Surface	Surface	Surface	Surface	Surface	Surface	
 12000011 12000014		 1907-R	10000506 10000506-RAL9003 10000506-SCH	25	✓	✓	✓	✓	✓			✓								✓
 12000012 12000015		 1908	10000038	25	✓	✓	✓	✓	✓											✓
 12000013 12000016		 1911	10000300	30	✓	✓	✓	✓	✓		✓									✓
		 1924	10000533	25	✓	✓	✓	✓	✓	✓										✓
12000055		 1508	10000537	20									✓	✓		✓				✓
		 1512-R	10000535-RAL9003 10000535-SCH-FS	25											✓					✓
12000057		 1207	10000583	20													✓	✓	✓	
		 1212	10000585	20													✓	✓	✓	
		 1212-R	10000587-W	20													✓	✓	✓	

# DESIGN LUMINAIRES



Photo: Pirjo Lindfors



## ULTIMA-P IP40

- Extremely small for a pendant luminaire, especially when considering the built-in optical technology and an output of up to 1,710 lm/m.
- The elegant brown leather loops with a rivet fit perfectly into the material mix of the luminaire.
- Standard includes multiple variations like 40° or 60°, Batwing and opal optics; 4 different color temperatures as well as 6 different housing/anti-glare color combinations.

For ULTIMA family





## LYRA ECLIPSE

Poetic dance of light and darkness.  
An elegant circular pendant luminaire with inner lighting.  
An eye-catcher in every lounge, mall or lobby.

- Small cross section with minimal pendant and supply cable for a refined design with clean finish.
- Available in 806 mm or 1,164 mm diameter.
- Various lumen outputs up to 4,950 lm.



## XOOTUBE™

XOOTUBE™ is a round linear luminaire which suits perfectly for different pendant solutions.  
With lumen outputs reaching up to over 2,500 lm/m, the fixture can be used for multiple purposes.  
XOOTUBE™ is possible to mount both horizontally and vertically as a perfect eye catcher.

- XOOTUBE™ is possible to adjust in any direction, making it flexible to use. So the 360° beam angle enables absolutely homogeneous light.
- The round design industrial design with a balance between robustness and elegance add an element of design to the room.
- The lumen output of 2,520 lm/m makes the luminaire functional.





## FIRE DANCE

Graceful floating light

FIRE DANCE is a pendant luminaire with a round airborne design bringing elegance in every room - superb for eye-catching applications.

Awakens your creativity with the flexible design lighting.

- Minimalistic and floating design
- High quality and homogenous luminaire in 2,600 K and 3,100 K as a highlight in every room
- lumen output up to 1,580 lm



## XOOM™ IN / XOOM™ OUT

XOOM-OUT is a circular luminaire with an aerial design floating in time and space. The light shines outward its ring shape and floods its surrounding with elegance.

XOOM-OUT complements any architectural concept with a graceful contrast of light and obscurity. Even though XOOM-OUT expels light out of its core, its innovative light distribution creates a singular lighting effect.

- Available in  $\varnothing$  1,000 mm and  $\varnothing$  1,400 mm
- High quality industrial design with almost invisible wires
- The lumen output up to 10,660 lm makes the luminaire perfect for large halls.

# TECHNICAL APPENDIX

## 220 – 249

<b>GENERAL REFERENCES AND PRODUCT SPECIFIC INFORMATION</b>	
Trademarks and copyrights .....	221
General references .....	221
Details regarding catalogue changes, min. and max. data sheet values and production tolerances .....	
Dim-to-warm .....	222
<b>STANDARDS AND NORMS</b>	
Standards and norms specifically for LEDs .....	223
Determination max. cable .....	224
Luminaire classification according to DIN 5040 .....	230
Photometrical code according to DIN EN 62717 .....	231
LM 79 and LM 80 .....	232
Security and environmental protection .....	233
EU-Energylabel - EU Regulation 874/2012 - energy labeling of electrical lamps and luminaires .....	234
REACH and RoHS compliance .....	234
High color rendition, high R9 .....	235
LED Linear™ laboratory: climate and temperature test chambers .....	236
LED Linear™ service offer:	
In house laboratory photometric measurements .....	239
Photobiological safety of LED Linear™ light sources .....	240
Lumen maintenance according to LM-80-08 .....	242
Life time prediction according to TM-21-11 .....	242
New standards in preparation .....	242
IES TM-30-15 Report HYDRA White .....	243
Outdoor linear lighting with high ingress protection for rough environments .....	244
Tolerance of the color temperature at IP67/IP68 products .....	244
Polyurethane Encapsulation System for LEDs .....	245
<b>ABOUT LED LINEAR™</b>	
LED Linear™ - Distributors / representatives .....	246
LED Linear™ - worldwide .....	248

## GENERAL REFERENCES AND PRODUCT SPECIFIC INFORMATION

### Trademarks and copyrights

LED Linear™ owns a broad portfolio of patents and trademarks for products manufactured by LED Linear™:

10 2008 016 697.9, PCT/EP 2009/002337, 10 709957.4-2307, PCT/EP 2010/000873, 10 709957.4, 10 2009 008 947.0, 10 2013 0052 30.0, 14001131.3, 50 2014 000 472.7, 2784373, 14/226877, 10 2012 013 332.4, 13 002 863.2, 13/932125, 10 201 301 7229.2, 102015001552.4, 20 2009 002 127.0, 20 2016 001 608.4, 20 2014 010 697.5, 2784373, 14/226877, 9,638,380, 13/307174, 20 2011 104 303, 20 2012 006 443.6, 202014002719.6, 002 069 351-01 bis -06, 402016000344.2, 29/469740, 402015000225.7-0001, 402015000225.7-0002, 402015000225.7-0003, 402015000225.7-0004, 402015000163-0001-0037, 402015000163-0002, 402015000163-0003, 402015000163-0004, 402015000163-0005, 402015000163-0006, 402015000163-0007, 402015000163-0008, 402015000163-0009, 402015000163-0010, 402015000163-0011, 402015000163-0012, 402015000163-0013, 402015000163-0014, 402015000163-0015, 402015000163-0016, 402015000163-0017, 402015000163-0018, 402015000163-0019, 402015000163-0020, 402015000163-0021, 402015000163-0022, 402015000163-0023, 402015000163-0024, 402015000163-0025, 402015000163-0026, 402015000163-0027, 402015000163-0028, 402015000163-0029, 402015000163-0030, 402015000163-0031, 402015000163-0032, 402015000163-0033, 402015000163-0034, 402015000163-0035, 402015000163-0036, 402015000163-0037, 402014000778.7, 29/325.374, 633,244, 000906235-0001, 000906235-0002, 000906235-0003, 000906235-0004, 000906235-0005, 29/469740, 001367676-0001, 001367676-0002, 001367676-0003, 001367676-0004, 001367676-0005, 001367676-0006, 001367676-0007, 001367676-0008, 001367676-0009, 001367676-0010, 001367676-0011, 001367676-0012, 001367676-0013, 003782267-0014, 004378610-0001, 004378610-0002, 004378610-0003, 004378610-0004, 004378610-0005, 004378610-0006, 004378610-0007, 004378610-0008, 004378610-0009, 004378610-0010, 004378610-0011, 30 2008 020 979, 007219959, 30 2012 000 809, 30 2012 000 809/7/09, 1132601, 4.374.183, T1215964J, 30 2012 000 808.9/09, 1132600, T1215963B, 4.374.182, 79/119246, 30703381.3/09, 010027605, 1102 872, 4,223,847, 79/107,641, T1200414J, 30 2011 028 727.9, T1112330H, 30 2010 057 680, 009903031, 4,156,313, 79/101,490, 1087873, 011065521, 011065513, 1512875, 1667663, 1691606, 1691609, 014961866, 1324479, 79198575, 1817269, 1821273, 011134996, 86/163695, 011415254, 4,986,108, 85/907705, 011415247, 5202489 85/953460, 011415239, 4458185, 85/907763, 011712429, 4998535, 85/883530, 86/036,654, 012152088, 86/129857, 012149621, 86/129781, 012318341, 86/136044, 012149613, 86/129704, 012318333, 4,746,032, 86/135731

### General references

This catalogue supersedes all previous issues. We reserve the right to make technical and design changes to improve our products or to meet modified statutory requirements. Current data will be supplied on request. Our continually updated product documentation can be accessed at [www.led-linear.com](http://www.led-linear.com).

When assembling all applicable rules and regulations must be followed, i. e. the low Voltage Directive and the relevant norms and standards.

LED Linear™ luminaires are designed, manufactured and tested to the applicable standards and technical regulations of the VDE. The luminous flux values and other photometric data relate to an ambient temperature of 25°C. At other temperatures, deviations from the values stated in the catalogue are possible.

LED Linear™ reserves the right to discontinue any products from its collection at any time whatsoever and without prior notice, without prejudice to the essential characteristics of the models described; LED Linear™ also reserves the right to make technical and photometric modifications as well as to change any parts, details or finishes deemed suitable for improvement purposes or due to construction and commercial requirements.

### Details regarding catalogue changes, min. and max. data sheet values and production tolerances

#### Changes

The values on this data sheet and catalogue can be changed because of technical development and innovation without a special notification.

#### Min. and max. ratings

Exceeding the minimum and maximum ratings as per data sheet will reduce lifetime or destroy the LED module. According to EN 60598-1, respectively UL 2108 and UL 8750 for North America the temperature of the LED module needs to be measured at the TC-point in a thermally constant status with a temperature sensor or temperature sensitive label (available at e. g. [www.rs-components.com](http://www.rs-components.com)).

#### Production tolerances

Due to the specific conditions of the manufacturing process of LED the typical data of technical parameters in the respective data sheet only reflects statistical figures not necessarily correspond to the actual parameters of every single product which could differ from the technical data.

# DIM-TO-WARM

“Dim-to-warm” describes the change in color temperature to the reddish area of the CIE (x, y) diagram of a luminaire during dimming. Well-known is this dimming behavior of thermal radiators such as incandescent or halogen lamps. As incandescent and halogen lamps are working with a glowing Wolfram wire. While dimming the wire glows less and less and is getting more reddish, as less current flows through it.


With the IN.finite CASAMBI control unit developed by LED Linear™, it is possible to mimic this dimming behavior of thermal radiators. This dimming feature is perceived as pleasant from a historical perspective. IN.finite CASAMBI controls warm and cold white LED modules in intensity so that the color temperature during dimming resembles a black body. The special feature is the color temperature shift towards longer wavelengths (= red shift) when dimming. The black body curve represents the ideal color temperature profile for white light and serves as a guideline at the same time.

By mixing cold white and warm white LEDs, each with a color temperature of approx. 5,000 K or 2,000 K, the resulting correlated color temperature can be specifically influenced. The IN.finite CASAMBI by LED Linear™ actively controls the mixing ratio of the two LEDs and thus mimics a very accurate color gradient along the black body curve. While color is controlled linear, the intensity is controlled logarithmic at the same time. This intelligent mixing of the parameters results in a Dim to Warm range of approx. 3,500 K down to 2,100 K.


The graph below shows the black body curve within the CIE color chart (XYZ system). At lower color temperatures the proportion of red increases significantly. The measurement of a VarioLED™ Flex IQW ATON HD 24 (4,000 K - 2,000 K) and the VarioLED™ Flex IQW NEXUS LD40 (5,000 K - 2,200 K) controlled by IN.finite CASAMBI shows that the ideal curve is nearly complete reproduced.

Blue measurement point represents the VarioLED™ Flex IQW ATON HD24 (4,000 K - 2,000 K) Red measurement point represents the VarioLED™ Flex IQW NEXUS LD40 (5,000 K - 2,200 K)

For more information about IN.finite CASAMBI (Art. # 16000267-ID2473) please visit our website [www.led-linear.com](http://www.led-linear.com)

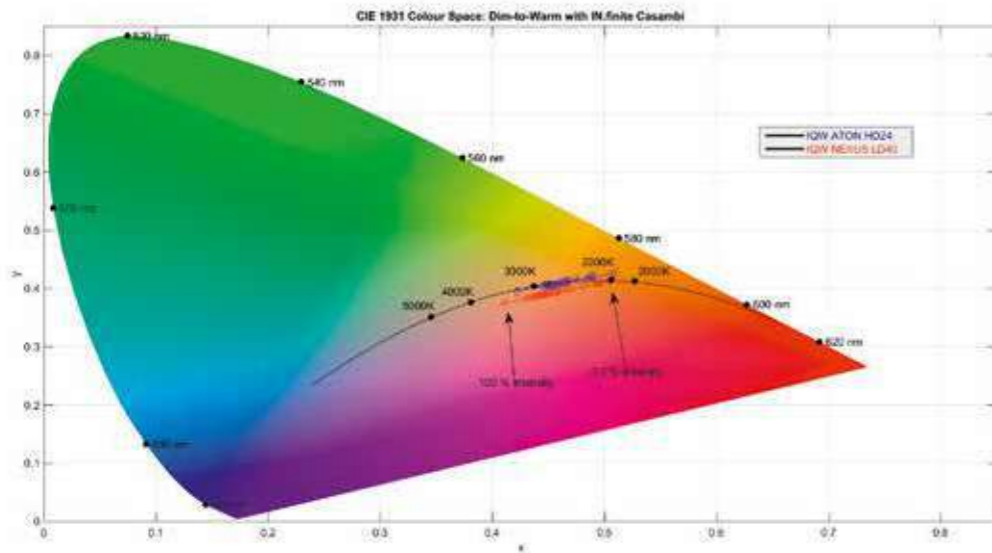

CIE-Diagram (XYZ-System) including the Black-Body-Curve

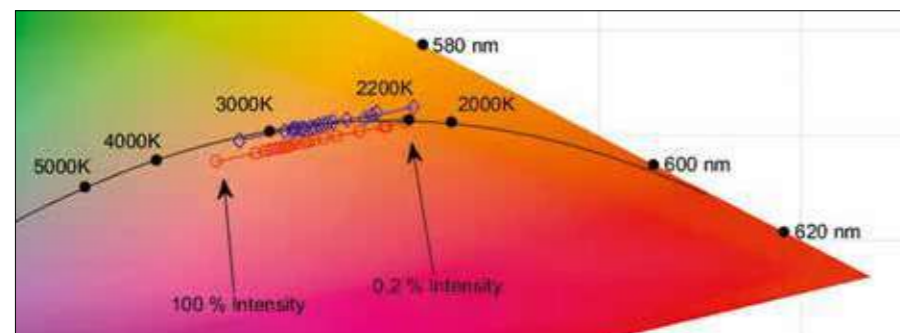

Measurement points along the Black-Body-Curve for VarioLED™ Flex IQW ATON HD24 (Blue) and VarioLED™ Flex IQW NEXUS LD40 (Red).

# STANDARDS AND NORMS

## STANDARDS AND NORMS SPECIFICALLY FOR LED'S

The importance of standards and norms specifically for LEDs and LED applications continues to grow steadily in the international market. Since the beginning of LED technology the standards and applications of the conventional lighting industry have been applied for many LED-based products. The safety aspects and the functional properties of LEDs are not entirely comparable with existing norms and standards for the conventional bulbs. The LEDs have to be treated as a separate application with separate standards.

To comply with the EU-Directive, according standards have to be applied. The current norms for LED lighting development include the norm for security of LED modules (DIN EN 62031) on the one hand and the photo biological security norm (DIN EN 62471) on the other hand. In addition to that further norms that will define the performance (DIN EN 62717) of LED and their applications for standard lighting applications are being prepared. These norms will include specific test methods and parameters for further LED developments in the future. Part of these norms will be standard test procedures to estimate the reliability and lifetime of LED modules and LED lamps.

For the certification of products with the CE mark, the products have to fulfill various requirements. For our LED Linear™ products especially the Low Voltage Directive 2014/35/EU and the EMC (Electro Magnetic Compatibility) Directive 2014/30/EU apply. In general the EMC Directive for LED modules can only be examined in a complete system connected to a converter and optionally to a control. In order to meet the Low Voltage Directive requirements, considering the security of LED modules, the norms are DIN EN 62031 and DIN EN 62471, which all LED Linear™ products adhere to.

Additionally, LED Linear™ meets the following european directives:

- 2009/125/EU (Ecodesign)
- 2011/65/EU (RoHS)
- 2012/19/EU (WEEE)

Some manufacturers of fixtures with LED modules deliver their products with an unstandardized technical documentation that is not restricted to any specific guideline. The manufacturer defines the parameters for the product and what will be provided with the customer. Besides the typical photometric and electrical data, these also include the reliability and lifetime of the product. Furthermore, it is yet to be determined how and under what circumstances these parameters are defined. This makes it difficult for the customers to compare products from different manufacturers with each other and to decide the most suitable product for their application.

For this reason another norm (DIN EN 62717) is in progress. This norm will specify the performance and the reliability of LED modules. It will apply for LED modules that emit white light with organic LEDs for general illumination. For LED lamps the norm DIN EN 62722 is being created. It will determine the specific requirements for LED lamps. The data supplied by LED Linear™ already covers most of the relevant characteristics of drafted norms.

LED Linear™ fulfills the following standards:

US-Market/UL Standard	Can-Market/CSA Standard
UL 8750	CSA C22.2#250
UL 2108	
Confirmation by certificates	
EU-Market	
LED modules	TM-30-15 DIN EN 62031 DIN EN 62471-1
LED luminaires	DIN EN 60598-1 DIN EN 62722 EN 55015 EN 60100 EN 61547 EN 62493 DIN EN 62717
Lifetime + Reliability + Measurement requirements	LM79 LM80 ANSI C78.377-2008 TM-21-11 IES LM-84 IES LM-28









## LUMINAIRE CLASSIFICATION ACCORDING TO DIN 5040

LED Linear™ luminaires are classified according to DIN 5040 and thus represent a simple tool for the lighting design. The corresponding indication of the subdivision can be found in the relevant data sheet of the optic or of the luminaire. With the luminaire classification according to DIN 5040 lights are classified according to the distribution of the luminous flux in the upper and lower hemisphere of the luminaire. For this, a standard room S was defined which space is based on the room index  $k = 1.25$  and a standard regular arrangement of luminaires, as seen in Figure 1. The definition of the room index  $k$  depending on the reflectance combinations for ceiling, walls and floor can be found in the publication LiTG 3.5.

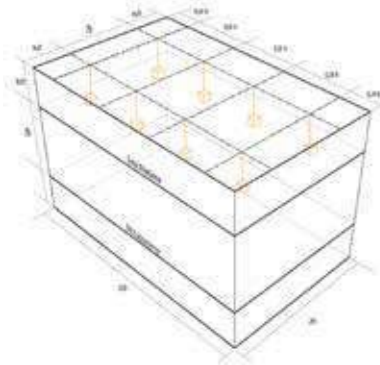


Figure 1 - Standard room S with luminaire standard arrangement in accordance with DIN 5040

The total luminous flux of the luminaire  $\Phi_L$  is composed of the partial luminous fluxes in the upper hemisphere  $\Phi_U$  and the lower hemisphere  $\Phi_D$ . A part of the luminous flux in the lower hemisphere  $\Phi_D$  falls directly on the used space of the standard room and forms the luminous flux  $\Phi_{SU}$  which generates the direct illuminance  $E_{dir}$  there. This illuminance is considered usable illuminance in order to realize, for example, a task lighting (office work). Similarly, the ceiling luminous flux in the standard room is described with  $\Phi_{SO}$ .

Based on the values defined above, the following parameters for the luminous flux distribution of a luminaire can be defined:

$\varphi_U = \Phi_U / \Phi_L$  Luminous flux in the lower hemisphere

$\varphi_D = \Phi_D / \Phi_L$  Luminous flux in the upper hemisphere

Further are defined:

$\varphi_{SU} = \Phi_{SU} / \Phi_U$  Usable luminous flux in the standard room S

$\varphi_{SO} = \Phi_{SO} / \Phi_D$  Luminous flux on the ceiling in the standard room S

By integrating the light intensity distribution, the relative partial luminous fluxes are determined and the luminaire can be categorized in a DIN 5040 table, as shown in Figure 2.

The code letter informs about the basic nature of the luminaires light distribution:

- A = direct illumination
- B = predominantly direct illumination
- C = direct-indirect illumination
- D = predominantly indirect illumination
- E = indirect illumination

The 1. code number arranges the luminaires according to the proportion of the direct luminous flux on the usable working plane in the standard room S  $\varphi_{SU}$  at the spatial luminous flux in the lower hemisphere  $\varphi_U$  (Direct illuminating component).

The 2. code number arranges the luminaires according to the proportion of the luminous flux on the ceiling of the standard room S  $\varphi_{SO}$  at the spatial luminous flux in the upper hemisphere  $\varphi_D$  (Indirect illuminating component).

If there is no luminous flux in the upper or lower hemisphere of the luminaire, the corresponding code is specified with 0.

Code letter	$\varphi_U$	$\varphi_D$	1. Code number	$\varphi_{SU}$	2. Code number	$\varphi_{SO}$
A	$0.9 \leq \varphi_U \leq 1.0$	$0 \leq \varphi_D \leq 0.1$	0	$\varphi_{SU} = 0$	0	$\varphi_{SO} = 0$
B	$0.6 \leq \varphi_U \leq 0.9$	$0.1 \leq \varphi_D \leq 0.4$	1	$0 \leq \varphi_{SU} \leq 0.3$	1	$0 \leq \varphi_{SO} \leq 0.3$
C	$0.4 \leq \varphi_U \leq 0.6$	$0.4 \leq \varphi_D \leq 0.6$	2	$0.3 \leq \varphi_{SU} \leq 0.4$	2	$0.5 \leq \varphi_{SO} \leq 0.7$
D	$0.1 \leq \varphi_U \leq 0.4$	$0.6 \leq \varphi_D \leq 0.9$	3	$0.4 \leq \varphi_{SU} \leq 0.5$	3	$0.7 \leq \varphi_{SO} \leq 0.9$
E	$0 \leq \varphi_U \leq 0.1$	$0.9 \leq \varphi_D \leq 1.0$	4	$0.5 \leq \varphi_{SU} \leq 0.6$	4	$0.9 \leq \varphi_{SO} \leq 1.0$
			5	$0.6 \leq \varphi_{SU} \leq 0.7$		
			6	$0.7 \leq \varphi_{SU} \leq 0.8$		
			7	$0.8 \leq \varphi_{SU} \leq 0.9$		
			8	$0.9 \leq \varphi_{SU} \leq 1.0$		
A			6			0

Figure 2 - Classification of luminous flux distribution of the luminaire in accordance with DIN 5040

An example, for a luminous flux distribution classified in accordance with DIN 5040 is shown in Figure 3.




Figure 3 - Example for a luminous flux distribution A60 according DIN 5040

## PHOTOMETRIC CODE ACCORDING TO DIN EN 62717

All LED lamps of LED Linear™ are marked with a photometric code on the data sheet. The photometric code provides information on photometric quantities of the used LED modules with white light emitting LEDs. The first 3 numbers indicate the general color

rendering (CRI index) and color temperature (CCT) of the modules. The subsequent 3 numbers handle the changes of color coordinates based on MacAdams ellipses and the lumen maintenance depending on the operating time.

Key for the photometric code:

Letter	1. Code number		2. + 3. Code number		4. Code number		5. Code number		6. Code number	
	Code	Initial CRI-Index	Code	Initial correlated color temperature in Kelvin	Code	Initial MacAdams ellipse	Code	MacAdams after 25% of the operating time (max. 6,000 h)	Code	Remaining lumen output after 25% of the operating time (max. 6,000 h)
W	7	70 - 79	20	2,000 K	2	2 step MacAdams ellipse	2	2 step MacAdams ellipse	7	$\geq 70\%$
	8	80 - 89	22	2,200 K	3	3 step MacAdams ellipse	3	3 step MacAdams ellipse	8	$\geq 80\%$
	9	90 - 99	24	2,400 K	4	4 step MacAdams ellipse	4	4 step MacAdams ellipse	9	$\geq 90\%$
					5	5 step MacAdams ellipse	5	5 step MacAdams ellipse		
					27	2,700 K				
					30	3,000 K				
			35	3,500 K						
			40	4,000 K						
			50	5,000 K						
W	8		27		3		3		9	

Example of the photometric code based on the VarioLED™ Flex HYDRA HD15 with a correlated color temperature of 2,700 K and a color rendering index of CRI > 85. The photometric code always starts with "W" White.



Figure 4 - VarioLED™ Flex HYDRA HD15 W827

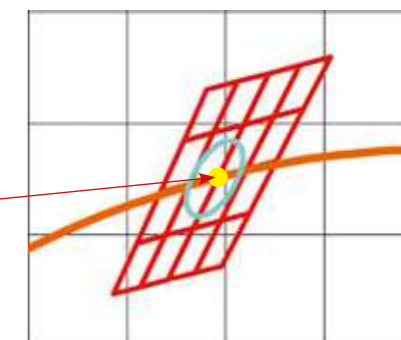


Figure 2 - 3 step MacAdams ellipse and 16 ANSI binnings for 2,700 K

## LM 79 AND LM 80



### LM 79 and LM 80

Light emitting diodes (LEDs) are a relatively new and unique source for outdoor lighting. They are more reliant upon effective thermal management than any previous source, more of a directional source, and have to be designed and tested as an entire lighting system.

Therefore, LEDs require new guidelines and practices for testing. There also needs to be a correlation between how LED manufacturers test their LEDs and how fixture manufacturers test their LED fixtures. In response, the Illuminating Engineering Society of North America or IESNA developed LM-79-08 and LM-80-08 for LED fixture and LED device testing.

As a high quality LED Linear™ lighting module and system supplier, LED Linear™ remains at the forefront of LED Linear™ lighting technology. LED Linear™ only uses high quality LED from Japanese manufacturers, who apply LM-80-08 to the LEDs delivered to LED Linear™.

LED Linear™ applies LM-79-08 to their LED lighting modules, systems and fixtures.

### The IESNA

The IESNA is a 100+ year old lighting industry group with membership that includes manufacturers (both sources and fixtures), lighting in IESNA designers and architects, utilities, and others affiliated with lighting such as consultants, government, researchers and educators.

### LM-80-08 for the LEDs themselves

LM-80-08 Approved Method: Measuring Lumen Maintenance of LED Light Sources was published by the IESNA Solid State Lighting (SSL) Subcommittee in the third quarter of 2008. Simply referred to as LM-80, this document covers lumen maintenance measurement for inorganic LED-based packages, arrays, and modules; it does not cover any other aspect of LED performance.

One of the key reasons for the development of LM-80 is due to differences in measuring LED performance criteria. LED manufacturers typically measure LEDs in pulse mode operation with no heat sink. The pulse is very short - typically 10 or 20 milliseconds (that is, thousands of a second) - which will not heat up the LED; therefore, no heat sink is required and Tj can be assumed to be equal to ambient temperature TA (typically held constant at 25°C). This is useful for doing high yield LED measurements quickly. This also explains why LED manufacturer data sheets typically show LED performance for Tj = 25°C.

In contrast, LED fixture manufacturers measure LED performance in situ, which means while it is in their fixture. Under these conditions, the LED is operated in constant DC mode and there are typically numerous LEDs configured together often in close proximity to one another, elevating Tj above 25°C. This elevated Tj affects the photometric and colorimetric performance of the LEDs. In order to compare “apples to apples”, a new testing criteria needed to be developed: LM-80-08.

LM-80-08 prescribes uniform test methods for LED manufacturers under controlled conditions for measuring LED lumen maintenance while controlling the LEDs TS or case temperature, the DC forward voltage and forward current to the LED. LM-80-08 requires 55°C, 85°C and one other TS chosen by the LED manufacturer. It also requires lumen maintenance data out to at least 6,000 hours of constant DC mode (not pulse mode) operation 4.

Many of LED Linear™ Japanese LED suppliers chose 120°C for the third TS for their LED and they have recorded data out to 10,000 hours which is the preferred duration in LM-80. Based upon LM-80-08 data, LED manufacturers then extrapolate lumen maintenance out to ten thousands of hours.

Our LED suppliers go out to 60,000 hours and beyond. While LM-80-08 does not specify the extrapolation method, many LED manufacturers use more conservative exponential extrapolation due to the exponential behavior of LEDs and most electronic components. The SSL Subcommittee is working on TM-21 which will standardize this extrapolation method.

The data resulting from LM-80-08 measurements are matrices of lumen maintenance values. LED fixture manufacturers use this data in combination with their UL in-situ thermal testing to predict the lumen maintenance of the LEDs when used in their fixtures and, subsequently, the lumen maintenance of the LED fixtures themselves. For example, if we measure 85°C TS at the hottest LED Linear™ LED in one of our fixtures, then we look up that particular data set from our Japanese suppliers to determine the LED fixture's lumen maintenance based upon and correlated with the LEDs lumen maintenance at that same TS. Fixture manufacturers also use the data to predict LED color stability over time at the various TS temperatures.

### LM-79-08 for the LED fixture

CIE S 025 test method for LED lamps, LED luminaires and LED modules. LED lumen maintenance and color stability are only part of the puzzle. It is helpful to characterize the performance of LEDs in fixtures so that the entire system is considered. That's where LM-79-08 comes in. LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products was published by the IESNA Solid State Lighting (SSL) Subcommittee in the first quarter of 2008. LM-79-08 covers photometric and colorimetric performance as well as electrical power measurements for inorganic LED fixtures 5. LM-79-08 prescribes uniform test methods for LED fixture manufacturers under controlled conditions using LED fixtures as they would be manufactured for production.

Unlike traditional sources which are typically tested using relative photometry with test lamps and ballasts, LED fixtures are tested using absolute photometry with production LEDs and fixtures in the orientation in which it will be installed to ensure a more true test of LED performance when in situ. As previously discussed, LEDs operated in situ will perform differently due to the elevated Tj which will be further impacted by fixture orientation and thermal conditions; if the LED array or module were removed from the fixture, its performance would change. This is precisely why absolute photometry is a must for LED fixtures.

LM-79-08 testing is typically performed with either an integrating sphere for all photometric and colorimetric measurements or an integrating sphere in combination with a goniophotometer. The integrating sphere is recommended for colorimetric measurements; alternately, a goniospectroradiometer or gonio-colorimeter may be used. LED Linear™ has an integration sphere for all colorimetric, radiometric and photometric measurements for single LEDs and a custom designed goniophotometer lab and equipment where we test LED fixtures following LM-79-08 procedures. We also test key LED fixtures in independent DOE approved labs - look for the .ies photometric files on our web site that indicate LM-79-08.

In 2015 CIE S 025 was published that focuses on test methods for LED fixtures.

## SECURITY AND ENVIRONMENTAL PROTECTION

### Protection classes with regard to insulation

Protection class	Symbol	Meaning
I		Luminaires in which protection is based not solely on the basic insulation but also on a protective earth conductor that is connected to exposed conductive parts.
II		Luminaires in which protection is based not solely on the basic insulation but also on an additional or reinforced insulation or which there is no protective earth connection.
III		Luminaires in which protection is based not solely on safety extra low voltage (SELV/PELV). There must be no voltage higher than the safety extra-low voltage in the luminaire. 50 V AC, 120 V DC

The protection class of a luminaire for mains voltage indicates the way in which an electric shock to the user is prevented in the event of a fault. A luminaire in protection class II does not have a protective earth so it places great demands on the design because in this case double isolations have to be available on electrically conductive parts.

### More protection classes

Symbol	Meaning
	Luminaires with this identifier are suitable according to DIN VDE 0710 Part 14 for installation in and on furniture, the material of which have normal or reduced flammability as per DIN 4102.
	Luminaires with this identifier are suitable according to DIN VDE 0710 Part 14 for installation in and on furniture with unknown flammability.

### The glow wire test

Symbol	Meaning
960°C	For general-purpose luminaires installed in enclosed horizontal escape routes and stairwells.
850°C	For general-purpose luminaires installed in buildings open to the general public if the entire visible area of the ceiling covered by the luminaires is more than 25% of the building area.
750°C	For other general-purpose luminaires installed in buildings open to the general public

External parts of fixed or suspended luminaires must be subjected to a glow wire test at the temperatures indicated above, based on their location and purpose. The above values are binding for France, otherwise a temperature of 650°C is usual.

More information and specifications can be taken from the DIN EN 60598-1.



### ETL-Label

Historically, structures and contents of the safety standards in the U.S. have developed different to the standards in the European market. The ETL label is a mark of quality that guarantees the proof of compliance with the relevant UL standards in the United States and the Canadian Standards in accordance with CSA standard. This label has a high acceptance in the U.S. and Canada. It is attributed to the Electrical testing laboratories, which are established by Thomas Alva Edison in 1896. The ETL Label is the second largest and fastest-growing certification label in the North American market.



### CE label

The CE label confirms that the product complies with the relevant EU directives, such as the Low-Voltage Directive 2014/35/EU or the EMC directive 2014/30/EU. Of course, LED Linear™ luminaires meet the requirements of the relevant EC directives and therefore carry the CE label.



### Compliance with safety regulations and other standards

Luminaires should not only look good and provide good light, they must also be protected against injury and fire. Safety is guaranteed by compliance with a variety of regulations and standards. Luminaires from LED Linear™ meet all relevant national and international regulations and this can be indicated by approval marks from independent test institutes such as the ones shown above. This is documented by additional approval marks, such as the VDE or ENEC certificate, if the customer wishes..



### German “Elektrogesetz”

The icon with crossed-out wastebasket on a EEE states that the product should not be disposed of with household waste at its end of life. Instead, it can be returned free of charge at an appropriate collection point nearby. Please check the available collection points in your city or local government. If the old unit contains personal data, please act responsibly and delete before disposing of it.

The registration number of LED Linear: WEEE-Reg.-Nr. DE 12683737.

### Safety of the human eye with LED products

In 2006 the International Electrotechnical Commission (IEC) has committed the IEC 62471:2006 to set up the photo biological safety with lamps and lamp systems. This standard can be applied to LEDs, too. In Germany and Europe the DIN EN 62471 must be applied to lamps and lamp systems. In this standard different risk groups are defined. The risk group classification includes the different spectral ranges and exposure time which takes effect to the human eye, especially for the blue and white light emitting LEDs. According to this definition most of our products are within the exempt group. In this case additional markings and protective actions are not necessary. Nevertheless, never look into the light source directly. Keep in mind that increasing the current or adding optical components can change the risk group and can damage the human eye.

## EU-ENERGY LABEL


### EU Regulation 874/2012 - energy labeling of electrical lamps and luminaires

The EU Regulation 874/2012 supplementing Directive 2010/30/ EU of the European Parliament deals with energy labeling of electrical lamps and luminaires. The stated aim of Regulation 874/2012 is to promote efficient products through clear information regarding their energy efficiency.

In the European Union energy-related products, such as lighting equipment, are marked with a label for electric power consumption - the EU Energy Label. The Energy Label for lamps provides information about the energy efficiency class, the respective lamp is assigned, and what demand for energy it has in 1,000 operating hours. This ensures an easy comparison of products in terms of energy consumption in the competition.

For us it is important to develop environmentally designed products, for thereby contributing to the sustainable conservation of resources. LED Linear™ develops and manufactures high quality products, which are characterized by high energy efficiency and a long lifetime. Starting with the product idea to the recycling of our products, we ensure that the environmental impact will be reduced continuously throughout the entire product life cycle.

- The EU Energy Labels are ready for download on the relevant product page at [www.led-linear.com](http://www.led-linear.com).
- EU Energy Label based on VarioLED™ Flex HYDRA SLD3 W850 with a product length of 1 m.

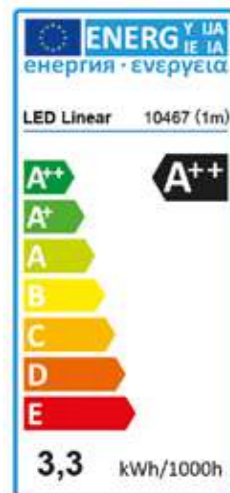

## REACH AND ROHS COMPLIANCE

Since 1 June 2007 the regulation (EC) no. 1907/2006, the so-called REACH regulation (REACH-Registration, Evaluation, Authorisation and Restriction of Chemicals) has been in force.

To put it in plain words, the REACH regulation distinguishes between chemical products ("substances on their own and in preparations") and non-chemical products ("substances in articles").

LED Linear™ GmbH as a manufacturer of non-chemical products (linear lighting solutions with LED) is a "producer of articles" according to the REACH regulation. As such a producer LED Linear™ GmbH would be in principle obliged to (pre-)register if, when using our products, chemical substances were released under normal and reasonably foreseeable conditions. But as this is not the case, only the provisions concerning the "candidate list" (substances of very high concern) are important for us.

According to these provisions, producers and importers of articles containing a substance from the "candidate list" in a concentration above 0.1 % by mass per article must provide their professional recipients with sufficient information to allow safe use of the products including, as a minimum, the name of that substance. If the articles contain more than 1 t/a of the substance, the European Chemicals Agency (ECHA) must be informed.

The candidate list according to article 59 (1, 10) REACH (EC regulation no. 1907/2006) has been published in the meantime (see internet address of the European Chemicals Agency (ECHA) <http://echa.europa.eu/>). However, we do not have any information that substances from the candidate list are contained in a concentration above 0.1 % by mass per article in the products delivered to you.

We want to clarify that for the manufacture of our products chemicals are of course used. If they contain substances liable to registration, the duty to register, however, exclusively applies to our suppliers and not to us as a "downstream user". We have contacted the corresponding suppliers to ensure that we are supplied, if possible, with the required chemicals.

We know, of course, the requirements of the RoHS guideline directive concerning lead, cadmium, mercury, hexavalent chromium, polybrominated biphenyl (PBB) and polybrominated diphenyl ethers (PBDE) and their implementation into national law. Our products are always conform to the current RoHS-policy.



## HIGH COLOR RENDITION, HIGH R9

The color rendition is a quality characteristic of light. The most natural of all light sources, the sun, has a color rendering index of CRI = 100. This means that all known colors are 100 % reproduced by the spectral emission of the sunlight. We have set ourselves the aim to perceive this characteristic of the sun with our products. Many LED Linear™ products provide a color rendering index of up to 98 and feature a R9 value of up to 90. Red shades are very powerful colors. The accurate color renderings of these deep red shades are measured in the R9 color spectrum. Many LEDs have a high overall CRI value, the critical R9 performance may be missing. Therefore selected LED Linear™ products based on the VarioLED™ Flex HYDRA LD5, HD6 and HD10 use special, purpose-optimized LEDs to ensure a higher color rendering in critical R9 range and thus reproduce strong colors in all facets of life.

Use this page to test the color rendering of our LED light lines.



# LED LINEAR LABORATORY: CLIMATE AND TEMPERATURE TEST CHAMBERS

To ensure and test our high level of product reliability and lifetime we have expanded our laboratory with modern climate and temperature shock test chambers. To have an impression of the performance of the chambers a few technical details are shown below.

## Climatic Test Chamber 2 x VCL4010

### Temperature mode

- Temperature range: -40°C - +180°C
- Temperature deviation: ±1°C
- Temperature homogeneity: ±2°C

### Climate mode

- Temperature range: 10°C - 95°C
- Humidity range: 10% - 98%
- Humidity range: ±3%
- Temperature deviation: ±0.5°C
- Temperature homogeneity: ±1.5°C

### General info


- Testing volume: 100 l
- Dimension of test chamber: 50 cm x 49 cm x 40 cm (H x W x L)
- 1 opening for electrical contacts
- Annual maintenance and calibration

### Changing rate:

- Heating: 3.5°C/min
- Cooling: 5°C/min

### Typical tests at LED Linear™

- Temperature Humidity Bias Test (THBT)
- 70°C & 85 % r. H.
- Severity level depends on duration
- I: 168 h
- II: 504 h
- III: 1,000 h
- IV: 2,000 h

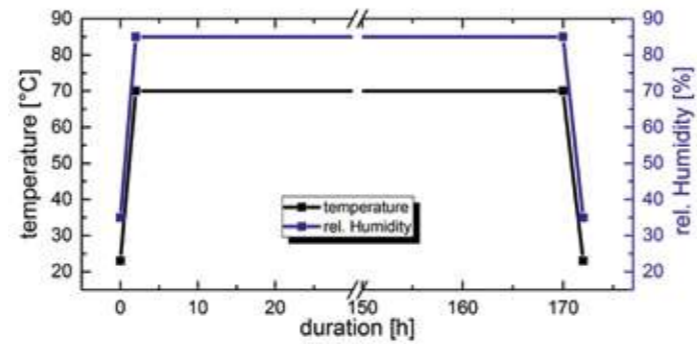

## Temperature Shock Chamber VT³701252

### Hot chamber

- Temperature range: +50°C - +220°C
- Temperature deviation: ±1°C
- Temperature homogeneity: ±2°C

### Cold chamber

- Temperature range: -80°C - +70°C
- Temperature deviation: ±1°C
- Temperature homogeneity: ±2°C



Schematic

### Changing rate:


- Heating: 14 K/min

### Changing rate:

- Heating: 2 K/min
- Cooling: 6.3 K/min

### Typical tests at LED Linear™

- Testing of interconnections of components
- -25°C; 85°C ; 30 min; 24 cycles
- reliability of the solder joints
- -55°C; 125°C; 30 min; ≤ 3,000 cycles
- (weibull distribution)

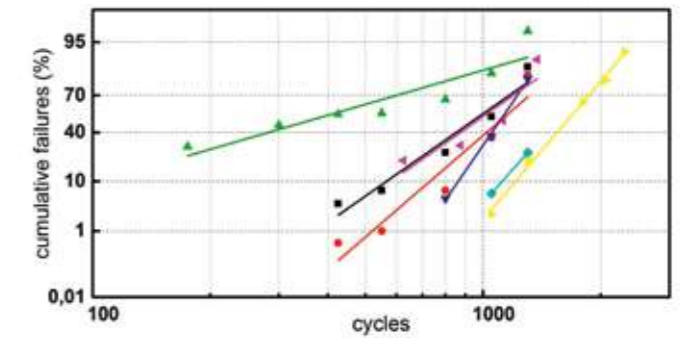

## Climatic Test Chamber 1 x VC³4100

### Temperature mode

- Temperature range: -42°C - 180°C
- Temperature deviation: ±1°C
- Temperature homogeneity: ±2°C

### Climate mode

- Temperature range: 10°C - 95°C
- Humidity range: 10% - 98%
- Humidity range: ±3%
- Temperature deviation: ±0.5°C
- Temperature homogeneity: ±1.5°C

### General info


- Testing volume: 990 l
- Dimension of test chamber: 95 cm x 110 cm x 95 cm (H x W x L)
- 2 openings for electrical contacts
- Annual maintenance and calibration

### Changing rate:

- Heating: 3.5°C/min
- Cooling: 5°C/min

### Typical tests at LED Linear™

- Temperature Humidity Bias Test (THBT)
- 70°C & 85 % r. H.
- Severity level depends on duration
- I: 168 h
- II: 504 h
- III: 1,000 h
- IV: 2,000 h

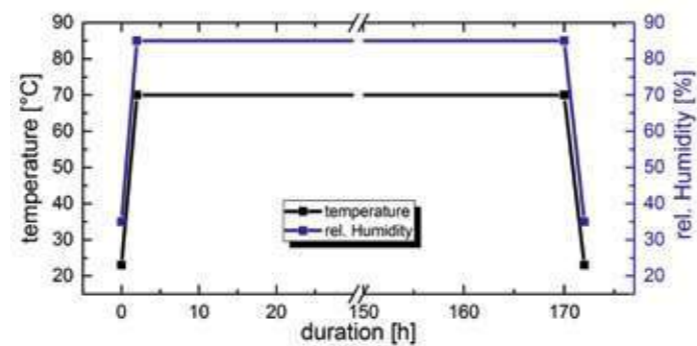

NEW

# PHOTOMETRIC MEASUREMENTS

## LED LINEAR™ SERVICE OFFER: IN HOUSE LABORATORY PHOTOMETRIC MEASUREMENTS

Since 2018 we are able to offer you photometric measurements and several tests as a new service of our in house laboratory. The main measurement and test equipment is shown below.

For applying these or additional measurements and tests do not hesitate to ask your contact partner of LED Linear™.


### Lighting Measurements<sup>A</sup>

#### Goniometer

- Measurement of the light distribution curve up to  $\gamma = 120^\circ$ <sup>A</sup>
- Luminous flux
- Measurement of angle dependent colorimetric values
- Photometric results available as IES- or EULUMDAT Files

#### Integration sphere

- Luminous flux
- Measurement of colorimetric values like: CCT, CRI etc.
- Measurement of spectral radiant flux



### Climatic Tests and Thermal Shock<sup>B</sup>

#### Temperature mode



- Temperature range:  $-40^\circ\text{C} - +180^\circ\text{C}$
- Temperature deviation:  $\pm 1^\circ\text{C}$
- Temperature homogeneity:  $\pm 2^\circ\text{C}$

#### Changing rate

- Heating:  $3.5^\circ\text{C}/\text{min}$
- Cooling:  $5^\circ\text{C}/\text{min}$

#### Climate mode



- Temperature range:  $10^\circ\text{C} - 95^\circ\text{C}$
- Humidity range: 10% - 98%
- Humidity range:  $\pm 3\%$
- Temperature deviation:  $\pm 0.5^\circ\text{C}$
- Temperature homogeneity:  $\pm 1.5^\circ\text{C}$

Thermal shock on demand

### Thermography<sup>C</sup>

- Thermographic measurement of devices and components



Template Test Report

<sup>A)</sup> Measurements according to DIN EN 13032-4:2015-08, CIE S 025:2015; DIN EN ISO/IEC 17025 (works in progress)

<sup>B)</sup> Diverse Standards possible, please ask

<sup>C)</sup> With ITC level 2 certified personnel




# PHOTOBIOLOGICAL SAFETY OF LED LINEAR LIGHT SOURCES

(HAZARDOUS BLUE INDEX ACCORDING TO IEC 62471)

Photobiological safety is a constant and highly frequented topic in the lighting industry. Most discussions are about hazardous radiation in certain wavelength ranges, on radical radiation angles and high luminances. Especially for the LED technology these topics are always on top due to the fact, that LEDs often have high luminous intensities on a small surface and a high blue component of the emitted light in the wavelength range of 380 nm - 480 nm which can harm

the eyes, especially the retina of humans. High luminances can be easily reduced by optical systems. It looks different with the high blue light part of the LED. Most LEDs for general lighting have a blue emitting chip-die on which a phosphor conversion layer enriched with color particles is applied. This combination creates white light through additive color mixing.

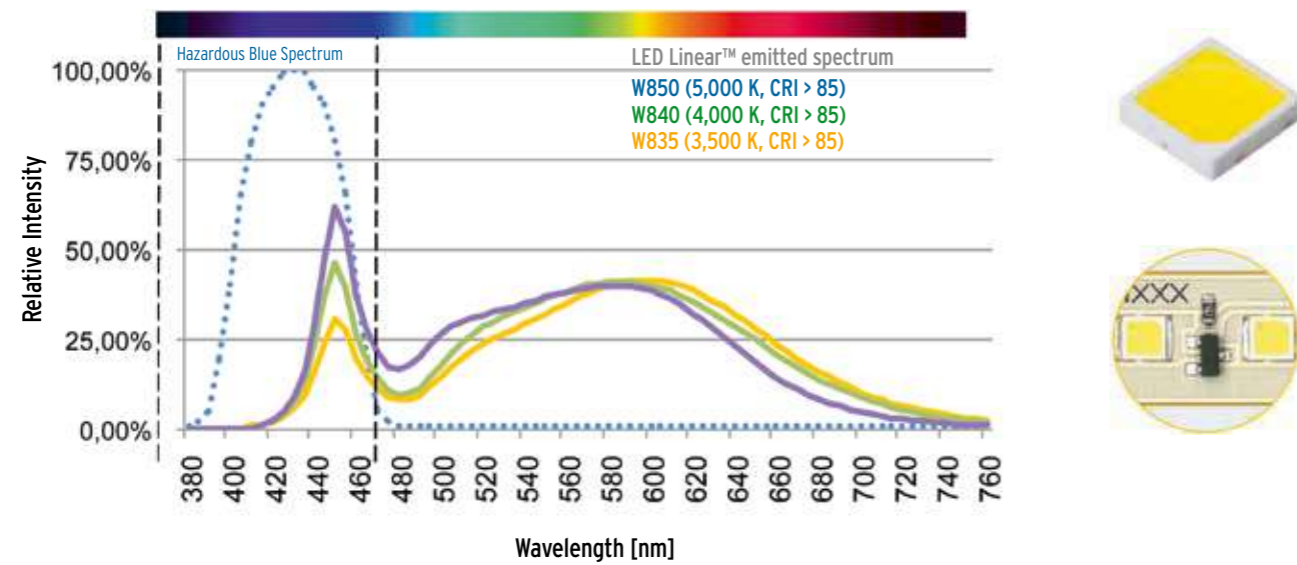

The IEC 62471 standard deals with the photobiological safety of light sources as well as the blue light hazard between 380 nm and 480 nm. To distinguish, four groups are defined in IEC 62471 to give the people an indication of the danger. LED Light engines

by LED Linear™ do not pose any harm to humans due to the low blue component of the emitted light within 380 nm - 480 nm. LED Linear™ light engines are principle for any type of lighting application.

LED Linear VarioLED™ Flex			
Exempt Group	Risk Group I*	Risk group II	Risk Group III
Lamp or luminaire does not constitute a danger in the sense of Photobiological safety. Labeling is not required.	Lamp or luminaire does not constitute a danger in the sense of Photobiological safety. Labeling is not required.	Lamp or luminaire does not constitute a danger in the sense of Photobiological safety. Labeling is not required.	Not permitted in general lighting

\* LED Linear™ LED light engines with "risk group I" according to IEC 62471 are correspondingly labeled or marked.

# PHOTOBIOLOGICAL SAFETY OF LED LINEAR LIGHT SOURCES

(VARIOLED FLEX HYDRA SERIES - HAZARDOUS BLUE INDEX ACCORDING TO IEC 62471)

This document certifies on behalf of LED Linear that, to the best of LED Linear's knowledge that the products based on VarioLED Flex™ HYDRA series was tested and evaluated by LED Linear™ in compliance with IEC 62471(2006) assigned to the risk group specified as follows:

**Details of Evaluation:**

Based on VarioLED Flex HYDRA Series up to  $I_f = 65 \text{ mA}$

Hazard Name	Symbol	Measurement Value	Emission Limits			Units	Risk Group
			Exempt	Low-Risk	Mod-Risk		
Actinic UV	$E_S$	*2	$10^{-3}$	$3 \times 10^{-3}$	$3 \times 10^{-2}$	$\frac{W}{m^2}$	Exempt group *3
Near UV	$E_{UVA}$	*2	10	33	$10^2$	$\frac{W}{m^2}$	Exempt group *3
Retinal blue-light	$L_B$	N/A	$10^2$	$10^4$	$4 \times 10^6$	$\frac{W}{m^2} / sr$	
Retinal blue-light, small source	$E_B$	$2.50 \times 10^{-1} \text{ *4}$ $3.17 \times 10^{-1} \text{ *5}$	1	1	$4 \times 10^2$	$\frac{W}{m^2}$	Exempt group *4 Exempt group *5
Retinal thermal	$L_R$	$3.80 \times 10^4 \text{ *4}$ $4.62 \times 10^4 \text{ *5}$	$8.2 \times 10^6 \text{ *4}$ $6.9 \times 10^6 \text{ *5}$	$8.2 \times 10^6 \text{ *4}$ $6.9 \times 10^6 \text{ *5}$	$2.1 \times 10^7 \text{ *4}$ $1.7 \times 10^7 \text{ *5}$	$\frac{W}{m^2} / sr$	Exempt group *4 Exempt group *5
Retinal thermal, weak visual stimulus	$L_{IR}$	*2	$5.5 \times 10^5 \text{ *4}$ $5.5 \times 10^5 \text{ *5}$	$5.5 \times 10^5 \text{ *4}$ $5.5 \times 10^5 \text{ *5}$	$5.5 \times 10^5 \text{ *4}$ $5.5 \times 10^5 \text{ *5}$	$\frac{W}{m^2} / sr$	Exempt group *3
IR radiation, eye	$E_{IR}$	*2	$10^2$	$5.7 \times 10^2$	$3.2 \times 10^3$	$\frac{W}{m^2}$	Exempt group *3

- \*1 Only if the hazard is considered when determining the Risk Group(s) assigned to the product, the measurement values for this hazard is provided.
- \*2 This product has not been evaluated for the hazard due to no emission in the applicable wavelength range.
- \*3 This product has been classified as Exempt Group due to no emission in the applicable wavelength range.
- \*4 For general lighting service lamps Measurement distance: 240 mm, Aperture size: 7 mm, Angular subtense: 3.39 mrad, Ambient: 25°C/40%RH
- \*5 For all other light sources Measurement distance: 200 mm, Aperture size: 7 mm, Angular subtense: 4.07 mrad, Ambient: 25°C/40%RH
- \*6 This product is not applicable to this hazard.

**Notes**

In accordance with the classification for lamps intended for general lighting service (GLS), this product was classified as Exempt Group. The measurement value for each hazard was below the emission limit for Exempt Group. In accordance with the classification for all other light sources, this product was classified as Exempt Group. The measurement value for each hazard was below the emission limit for Exempt Group.


\* LED Linear™ LED light engines with "risk group I" according to IEC 62471 are correspondingly labeled or marked.

## LUMEN MAINTENANCE ACCORDING TO LM-80-08

The standard LM-80-08 "Measuring Lumen Maintenance of LED Light Sources" provides methods of the measurement of lumen maintenance of LED packages and LED modules.

The products shall be tested for at least 6,000 hours with data collection at a minimum of every 1,000 hours. Test must include three case temperatures, recommend-

ing nominal case temperatures: 55°C, 85°C and a third temperature which can be freely chosen by the manufacturer and is in our case mostly at 105°C. Depending on the application with corresponding current an additional case temperature is selected. Chromaticity or voltage shift is also reported over the measurement time.

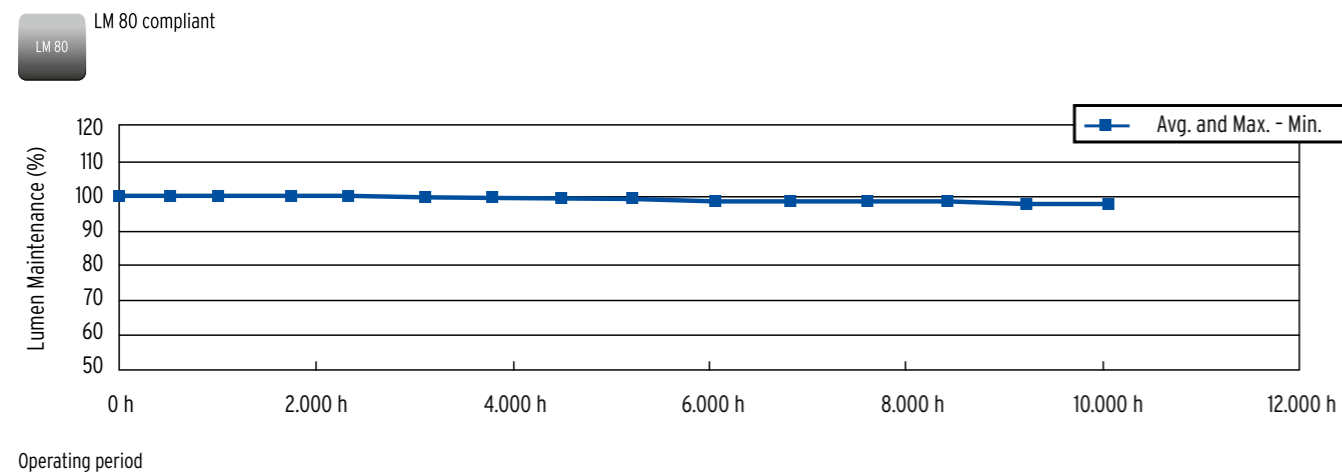

## LIFETIME PREDICTION ACCORDING TO TM-21-11

The TM-21-11 standard „Projecting Long Term Lumen Maintenance of LED Light Sources“ provides a calculation tool to interpret the data collected from LM-80-08 testing. LED Linear™ provides users with lumen maintenance life projection or to predict estimated lumen output values at a given time duration by interpolating lumen maintenance behaviors for the in-situ temperature which are different from testing temperature.

For example the lumen maintenance life projection L80 in hours is estimated when 80% from primarily lumen output is given. Or the predicted lumen maintenance can be calculated within a given lifetime.

LED Linear™ calculates all lifetime data according to the standard TM-21-11 and are documented on all data sheets. Do not hesitate to ask for detailed test reports.

## NEW STANDARDS

### Lumen maintenance according to IES LM-84

This standard provides the method for reproducible measurements of lumen and color maintenance of LED lamps, light engines and LED luminaires. It does not provide performance requirements or predictive estimations or extrapolation for lumen maintenance beyond the limits of the lumen maintenance determined from actual measurements.

### Lifetime prediction according to IES LM-28

The typical minimum test duration is 6,000 h. If at least 6,000 h of LM-84 data are available, a TM-21 like projection based on these data can be used. LM-84 data may be used in conjunction with LM-80 data for the same type of LEDs to reduce the test duration to 3,000 h. Some specification allows 3,000 hour test results to be used for prequalification.

## VarioLED™ Flex VENUS White TV IP67

Private residence, Davos



Photo: Daniel Kessler, Zürich

## IES TM-30-15 REPORT: VARIOLED™ FLEX WHITE

In May 2015 the Illuminating Engineering Society proposed a new calculation method for the color rendering of LEDs. This new method is described in detail in the technical memorandum IES TM-30-15. This novel method assesses the spectral power distribution (SPD) of white light sources near the Planck locus regarding the color fidelity, color discrimination and color preference. The TM-30-15 method utilizes 99 color evaluation samples (CES) - each represented by a spectral reflectance factor function - to quantify the difference in color rendition between the test source and reference source. This allows for a much more differentiated assessment of the color rendering of a light source compared to the CRI method utilizing only 8 reference colors. The introduced Fidelity Index  $R_f$  and the Gamut Index  $R_g$  characterizing the light source will help our customers to specify our luminaires more easily for certain applications or for projects with given design rules.

- ADONIS True Color IP67\* / KALYPSO True Color IP67
- VarioLED™ OCEANOS True Color IP67
- XOOLINE™ IP40/IP67
- LYRA IP40
- LYRA 36 NANO IP40
- XOOLUX™ NANO IP67
- LUNA IP40
- XOOLUM™ IP40/IP67 / XOOLUM™ R IP20/IP67
- MARS CV / MARS CC IP40
- XOOTUBE™ 38 IP40
- XOOTOO IP40

This report details the findings of the tests conducted on the color rendering of the product families VarioLED™ Flex HYDRA, SOL, NEXUS and ATON as well as XOOMINESCENT™. The tests and calculation methods are fully compliant with the novel IES standard TM-30-15. The results can be transferred without restrictions of any kind to system luminaires, that are using the HYDRA White tapes as light engine, in particular:

- VarioLED™ Flex NEXUS / HYDRA / SOL / ATON / ECO
- XOOMINESCENT™ CC
- VarioLED™ Flex VENUS / PHOBOS / SKYLLA TV IP67\*
- VarioLED™ Flex VENUS / PHOBOS / SKYLLA SV IP67\*
- VarioLED™ Flex VENUS True Color TV/3D

The measurements of the spectral power distribution are conducted at 25°C ambient temperature in the photometric laboratory of LED Linear™ using an absolute calibrated spectrometer BTS256-LED in the integrating sphere ISD-100HF-V01 (both Gigahertz Optik, Germany). The tested CRI 95+ and CRI 85+ LED types are tested with the photometric codes W830, W930, W940. TM30 reports for the other CCTs are available on request.

This report is based on calculations processed with the IES TM-30-15 Advanced Calculation Tool (version 1.01 as of 2015-10-02), provided by the Illuminating Engineering Society (IES).

\*) The LED tapes in IP67 products are encapsulated in Polyurethane (PU). This can cause a specific CCT shift of about 200 - 400 K into the cold white spectrum along the Planck locus. The PU encapsulation has no impact on the integral index  $R_f$ . However, the CCT shift may influence individual  $R_i$  of the 99 CES. We will provide CES diagrams of the IP67 products on request.

## OUTDOOR LINEAR LIGHTING WITH HIGH INGRESS PROTECTION FOR ROUGH ENVIRONMENTS

The entire VarioLED™ Flex Tape Portfolio is as well designed for the application in rough environmental conditions. We offer up to IP68 protect LED Lighting products. Based on our patented process technology we seal our products in a continuous cover of highly resistant polyurethane.

With our design we protect the products against the immersion of water.

The used material itself is resistant against UV-A, UV-B, fuel, acid, solvents and salt water. Thermal shock, heat, high temperature, abrasion and flammability resistance guarantee a high product quality and durability, too.

## TOLERANCE OF THE COLOR TEMPERATURE AT IP67/IP68 PRODUCTS

The values mentioned in the data sheets and in the photometric files represent statistical variables. The values do not necessarily represent the exact parameters of an individual product, so the actual color temperature can be different from averages indicated in the data sheets.

The tolerance of the color temperature of IP67 products are caused by

- the LED
- the production process
- the encapsulation material
- the measurement

### The LED:

The LED are classified in binnings according to their color temperature, i. e. divided into different finely graduated classes. The human eye perceives color temperatures within one MacAdam binning as absolutely homogeneous. In case of cool white LEDs, the tolerance of the color temperature within one binning is larger than in case of warm white LEDs.

### Encapsulation material:

Due to the encapsulation material polyurethane the respective spectral regions are affected differently. The optical path through the encapsulation material affects the color temperature on the basis of wavelength-dependent absorption. Here, the blue part of the spectrum passes out preferably from the encapsulation material. The light is therefore overall colder due to the shift to higher color temperatures. This effect is more pronounced in warm white LED strips.

### Production process:

The production of our LED strips is based on several process steps that are all subject to a tolerance. Especially during the encapsulation tolerances affecting the color temperature can occur. For some products, multilayer systems from different encapsulation materials are generated leading to the increase in the CCT value. In the technical process, deviations of the layer compositions due to machine tolerances are unavoidable.

### Measurement:

The color temperature is determined by measuring instruments in the lighting laboratory. As in any measurement, the absolute accuracy of laboratory measurements is limited due to statistics and the given measurement inaccuracy of instruments and devices.

## POLYURETHANE ENCAPSULATION SYSTEM FOR LEDS

### Outdoor Resistance

Tests	Ref. Method	Test Conditions	Results
Florida Test	SAE J 1976	Direkt Inland, 45° South	Good (after 2 years)
Arizona Test	SAE J 1976	Direkt Weathering, 45° South	Good (after 2 years )
Xenon WOM	SAE J1960-89 2000h	65 °C - cycle 102 min. UV + 18 min. UV/water spray	no color change, minimal gloss change
Weatherometer QUV-B	SAE J 2020	(8 h UV 60° - 4 h cond. 50 °C)	no color change, minimal gloss change
Weatherometer QUV-A	SAE J 2020	2.000 h (8 h UV 70° - 4 h cond. 50 °C)	no color change, minimal gloss change

### Water and Chemical Resistance

Tests	Ref. Method	Test Conditions	Results
Fuel Resistance	G.M.6073	Immersion	No gloss change/No degradation
Acid Resistance	MS-CG12	Spot Test 0.5 - 10 % conc.	No gloss change/No degradation
Solvent Resistance	GM 6121 M	Various types of used chemicals	No gloss change/No degradation
Water Immersion	WSK-M3G178	240 h @ 45°C	No gloss change/No degradation
Salt Spray Resistance	ASTM B117-95	2.000 h @ 38 °C 5 % NaCl	No gloss change/No degradation
Humidity Resistance	MS-CG12	250 h @ 40 °C 100 % R. H.	No gloss change/No degradation
Environmental Cycle	G.M.6073	Three Cycles	No gloss change/No degradation

### Heat Resistance

Tests	Ref. Method	Test Conditions	Results
Heat Resistance	MS-CG12	250 h @ 80 °C	No gloss change/No degradation
High Temperature Resistance	G.M.6073	60 min. @ 93 °C	No gloss change/No degradation
Thermal Shock	ESK-M99P16-A:3.5.5	16 h @ - 40 °C+ water @ 70 °C/10 cycles	No gloss change/No degradation

### Abrasion Resistance

Tests	Ref. Method	Test Conditions	Results
Stone Chip Resistance	SAE J400:85	0.47 L of 250 - 300 graded gravel fired @ sample @ 480 KPa in 5 - 10 s	Chipping rating 10- No chipping to substrate

### Flammability Resistance

Tests	Ref. Method	Test Conditions	Results
Flammability Resistance	FMVSS 302	ISO 3795	Flame self extinguishing

### Electrical Properties

Tests	Ref. Method	Test Conditions	Results
Surface Resistivity	ASTM D257	500 V - spec. thickness 2 mm	2 x 10E15 Ohm
Volume Resistivity	ASTM D257	500 V - spec. thickness 2 mm	1 x 10E15 Ohm cm

## LED LINEAR™ – DISTRIBUTORS / REPRESENTATIVES

## • Africa

Kenya  
**LIGHTING SOLUTIONS LTD.**  
 Suite 27, Oiliba Plaza,  
 Muthaiga Road, Nairobi  
 PO Box 41 - 00606, Nairobi  
 Phone +254 729 110 190  
 info@lightingsolutions.co.ke

South Africa  
**Light Kinetics (PTY) Ltd.**  
 P.O. Box 92516, Norwood  
 2117 Johannesburg,  
 Phone +27 11 728 1249  
 cthelight@lightkinetics.com

South Africa  
**Lighting Innovations**  
 Cnr. Carey & Fifth Streets  
 Wynberg, 2091  
 PO Box 548 Bergvele 2012  
 Johannesburg  
 Phone +27 11 444 1168  
 info@lightinginnovations.co.za

## • Asia

China  
**LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO. LTD.**  
 Shanghai China  
 mainland Regional HQ  
 Room 1804, South Building  
 300 Xuanhua Road  
 Changning District  
 Shanghai (200050) PRC.  
 Phone +86 21 5238 9115  
 Fax +86 21 5238 8727  
 asia@led-linear.com

Hong Kong  
**Luci Pte. Ltd. Hong Kong Marketing Office**  
 Room 1801, 18/F  
 Kwai Hung Holdings Centre  
 89 King's Road, North Point  
 Hong Kong  
 Phone +852-2219-8462  
 asia@led-linear.com

## • Middle East

Israel  
**Steinitz Lirad Lighting Engineering Ltd.**  
 25 Hatzoref Street  
 PO Box 588  
 Har-Yona Industrial Park,  
 Nazareth Illit  
 Phone +972 4641 4525  
 lirad\_tech@interg.co.il

## • Australia

Japan  
**Luci Co., Ltd.**  
 Akasaka Bldg. 3F, 4-13-13  
 Akasaka, Minato-ku  
 Tokyo 107-0052  
 Phone +81 3 6327 7409  
 japan@led-linear.com

Singapore  
**Luci Pte. Ltd. Singapore World HQ**  
 52A Tanjong Pagar Road  
 Singapore 088473  
 Phone +65 6291 2410  
 asia@led-linear.com

Australia  
**Eagle Lighting Australia**  
 17 - 19 Jets Court  
 Melbourne Airport,  
 Victoria, 3045 #  
 Phone +61 3 9344 7444  
 eagle@eaglelighting.com.au

## • Europa

Belgium  
**Fagerhult Belgium**  
 Deerlijksestraat 57  
 8500 Kortrijk  
 Phone +32 (0)56 123 360  
 info@fagerhult.be

Belgium  
**HUGO NEUMANN**  
 5 Parc Industriel  
 1440 Wauthier-Braine  
 Phone +32 2367 8600  
 Fax +32 2367 8610  
 info@hugo-neumann.com

## • Middle / South America / Caribbean

Brasilia  
**Eurolighting**  
 Al Mamaore 911, Alphaville  
 Brazil  
 Phone +55 11 3167 78 28  
 ricardo.simoes@eurolighting.com.br

Caribbean  
**Spectro Lighting**  
 C/ Haim López-Penha No.11  
 Ens. Paraíso, Sto Dgo  
 Detrás de Santo Domingo Motors  
 Dominican Republic  
 Phone +809 476 9117  
 info@spectro.com.do

Chile  
**BP Iluminacion**  
 Santa Elena de Huechuraba  
 1895  
 Huechuraba  
 Santiago  
 Phone +562 2876 9400  
 contacto@byp.cl

Panama  
**Gruppo Eska**  
 Bella Vista, Calle 42  
 Edificio Aquazul  
 Panama City  
 Phone +507 6678 9100  
 mohamed.kabbani@grupoeska.com

Peru  
**Trazzo Iluminacion**  
 Libertadores 274  
 San Isidro Lima  
 Phone +51 511 615 9920  
 aarrarte@trazzoiluminacion.com

Cyprus  
**Luca Ataliotis Ltd.**  
 10, Katsonis Street  
 Neoflen Marina Buld,  
 3<sup>rd</sup> floor  
 Off. 301 - 302, PO Box 25121  
 1307 Nicosia  
 Phone +357 2251 5511  
 info@luceataliotis.com

Denmark  
**Fagerhult AS**  
 Sluseholmen 8A  
 DK-2450 København SV  
 Phone +45 43553700  
 post@fagerhult.dk

Denmark  
**OKHOLM LIGHTING a/s**  
 Handvearkevej 5  
 6270 Tønder  
 Phone +45 7471 0436  
 mail@okholm-lighting.dk

Estonia  
**BM Light OÜ**  
 Kolmikkaare 12  
 76905 Muraste Küla,  
 Harku Vald  
 Phone +372 639 1412  
 indrek.mumm@bmlight.ee

Finland  
**Fagerhult Oy**  
 Mannerheimintie 113  
 FI-00280 Helsinki  
 Phone +35 809 777 1580  
 info@fagerhult.fi

New Zealand  
**Fagerhult New Zealand**  
 Level 1, 12 Allens Road,  
 East Tamaki, Auckland 2013  
 Phone +64 0800 324 374  
 customerservice@fagerhult.co.nz

New Zealand  
**Ocean Architectural Lighting Ltd**  
 9c/89 Ellice Road, Wairau  
 Valley, Auckland 0629  
 Phone +64 (9) 444-2799  
 Fax +64 (9) 444-2791  
 enquiries@oceanlighting.co.nz

Greece  
**LUCE ATALIOTIS**  
 Kifisias ave. 360A  
 Chalandri, Athens 15233  
 Phone +30 210 689 901 113  
 Fax +30 210 689 9014  
 info@luce.gr

Greece  
**Smeke S.A Lighting Systems**  
 78 Sp.Merkouri Str.  
 11634 Athens  
 Phone +30 210 722 8504  
 Fax +30 210 723 9043  
 info@smeke.gr

Iceland  
**Reykjafell hf**  
 Skipholt 35  
 105 Reykjavik  
 Phone +354 588 6000  
 reykjafell@reykjafell.is

Ireland  
**Fagerhult Lighting Ltd**  
 Unit F1  
 Calmount Park  
 Ballymount  
 Dublin 12  
 Phone +353 1 426 02 00

Latvia  
**SPECTRUM A/S**  
 Balvu Iela 5  
 1003 Riga  
 Phone +371 6741 6841  
 Fax +371 6741 6912  
 spectrum@spectrum.lv

Netherlands  
**Q-CAT Lighting b.v.**  
 Van Heekstraat 11  
 3125 BN Schiedam  
 Phone +31 104 151 811  
 Fax +31 104 151 715  
 roelmeijer@qcat.nl

Netherlands  
**Fagerhult BV**  
 Lichtschip 19, 3991 CP  
 Houten,  
 Postbus 320, 3990 GC  
 Houten  
 Phone +31 030 688 99 00  
 lighting@fagerhult.nl

Norway  
**Fagerhult Belysning AS**  
 Postboks 471, 1327 Lysaker  
 Phone +47 22 06 55 00  
 kundservice@fagerhult.no

Poland  
**Fagerhult Sp. z o.o.**  
 ul. 17 Stycznia 48  
 02-146 Warszawa  
 Phone +48 22 749 12 50

Russia  
**AT-Light LLC**  
 9, bld. 4, Gostinichnaya str.  
 127106 Moskau  
 Phone +74 9566 93513  
 Fax +74 9566 93513  
 info@at-light.ru

Spain  
**Difusiona S.L.**  
 Provençals 94  
 08019 Barcelona  
 Phone +34 93 362 2279  
 info@difusiona.eu

Sweden  
**Fagerhults Belysning AB**  
 Ävägen 1  
 SE-566 80 Habo  
 Phone +46 36 10 85 00  
 info@fagerhult.se

Sweden  
**Luxlight Skandinavien AB**  
 Aröds Industriväg 76  
 42243 Hisings Backa  
 Phone +46 31 97 60 65  
 info@luxlight.se

Switzerland  
**LIGHT ON Beleuchtungstechnik GmbH**  
 Dachslerenstrasse 7  
 CH-8702 Zollikon  
 Phone +41 448 877 501  
 Fax +41 448 877 505  
 info@light-on.ch

Turkey  
**Hi-Tec Aydınlatma Mühendislik San. ve Tic. Ltd. Şti.**  
 Sedef Cad. No: 2  
 A Blok. Kat: 19 D:80  
 TR 34758  
 Ataşehir/İstanbul  
 Phone +90 216 456 3794  
 hi-tec@hi-tec.com.tr

Turkey  
**Paarla City Solutions**  
 Abdi İpekci Caddesi  
 No: 23 Kat: 3 Nisantasi  
 34367 İstanbul - Sisli  
 Phone +90 212 219 2482  
 info@paarla.com

United Kingdom  
**Fagerhult Lighting Ltd**  
 33-34 Dolben Street,  
 London, SE1 0UO  
 Phone +44 207 403 4123  
 light@fagerhult.co.uk

United Kingdom  
**Architectural FX**  
 Units 13 & 14  
 Longshot Lane Industrial Estate  
 Bracknell  
 Berkshire RG12 1RL  
 Phone +44 1344 291 536  
 cs@architecturalfx.co.uk

## • New Zealand

New Zealand  
**Fagerhult New Zealand**  
 Level 1, 12 Allens Road,  
 East Tamaki, Auckland 2013  
 Phone +64 0800 324 374  
 customerservice@fagerhult.co.nz


New Zealand  
**Ocean Architectural Lighting Ltd**  
 9c/89 Ellice Road, Wairau  
 Valley, Auckland 0629  
 Phone +64 (9) 444-2799  
 Fax +64 (9) 444-2791  
 enquiries@oceanlighting.co.nz

## • Canada / USA Representatives

Canada  
**LED Linear™ Canada**  
 25 Ripley Avenue  
 Toronto, ON M6S 3P2  
 Phone +1 416 538 5152  
 Canada@led-linear.com


USA  
**LED Linear™ USA, Inc.**  
 2186 Liberty Drive  
 Niagara Falls, NY 14304  
 Phone +1 716 283 4400  
 USA@led-linear.com

An overview of the current Representatives of our branch offices in Canada and the United States you will find here:  
[www.led-linear.com/distribution](http://www.led-linear.com/distribution)

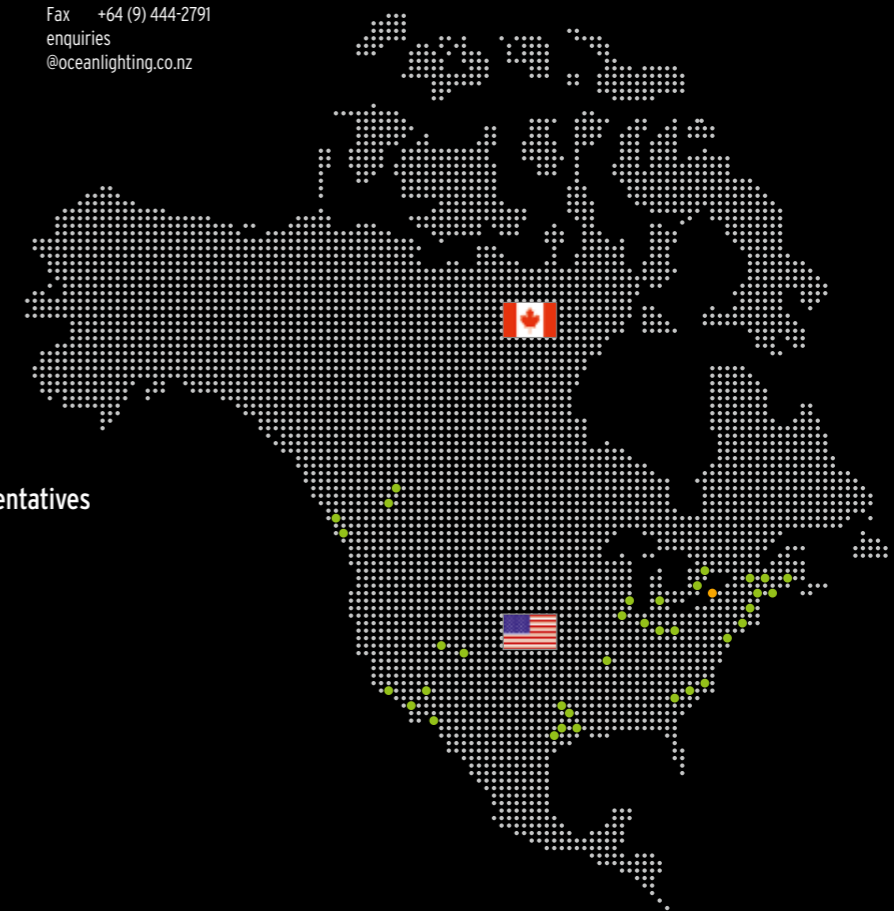

# LED LINEAR™

A Fagerhult Group Company

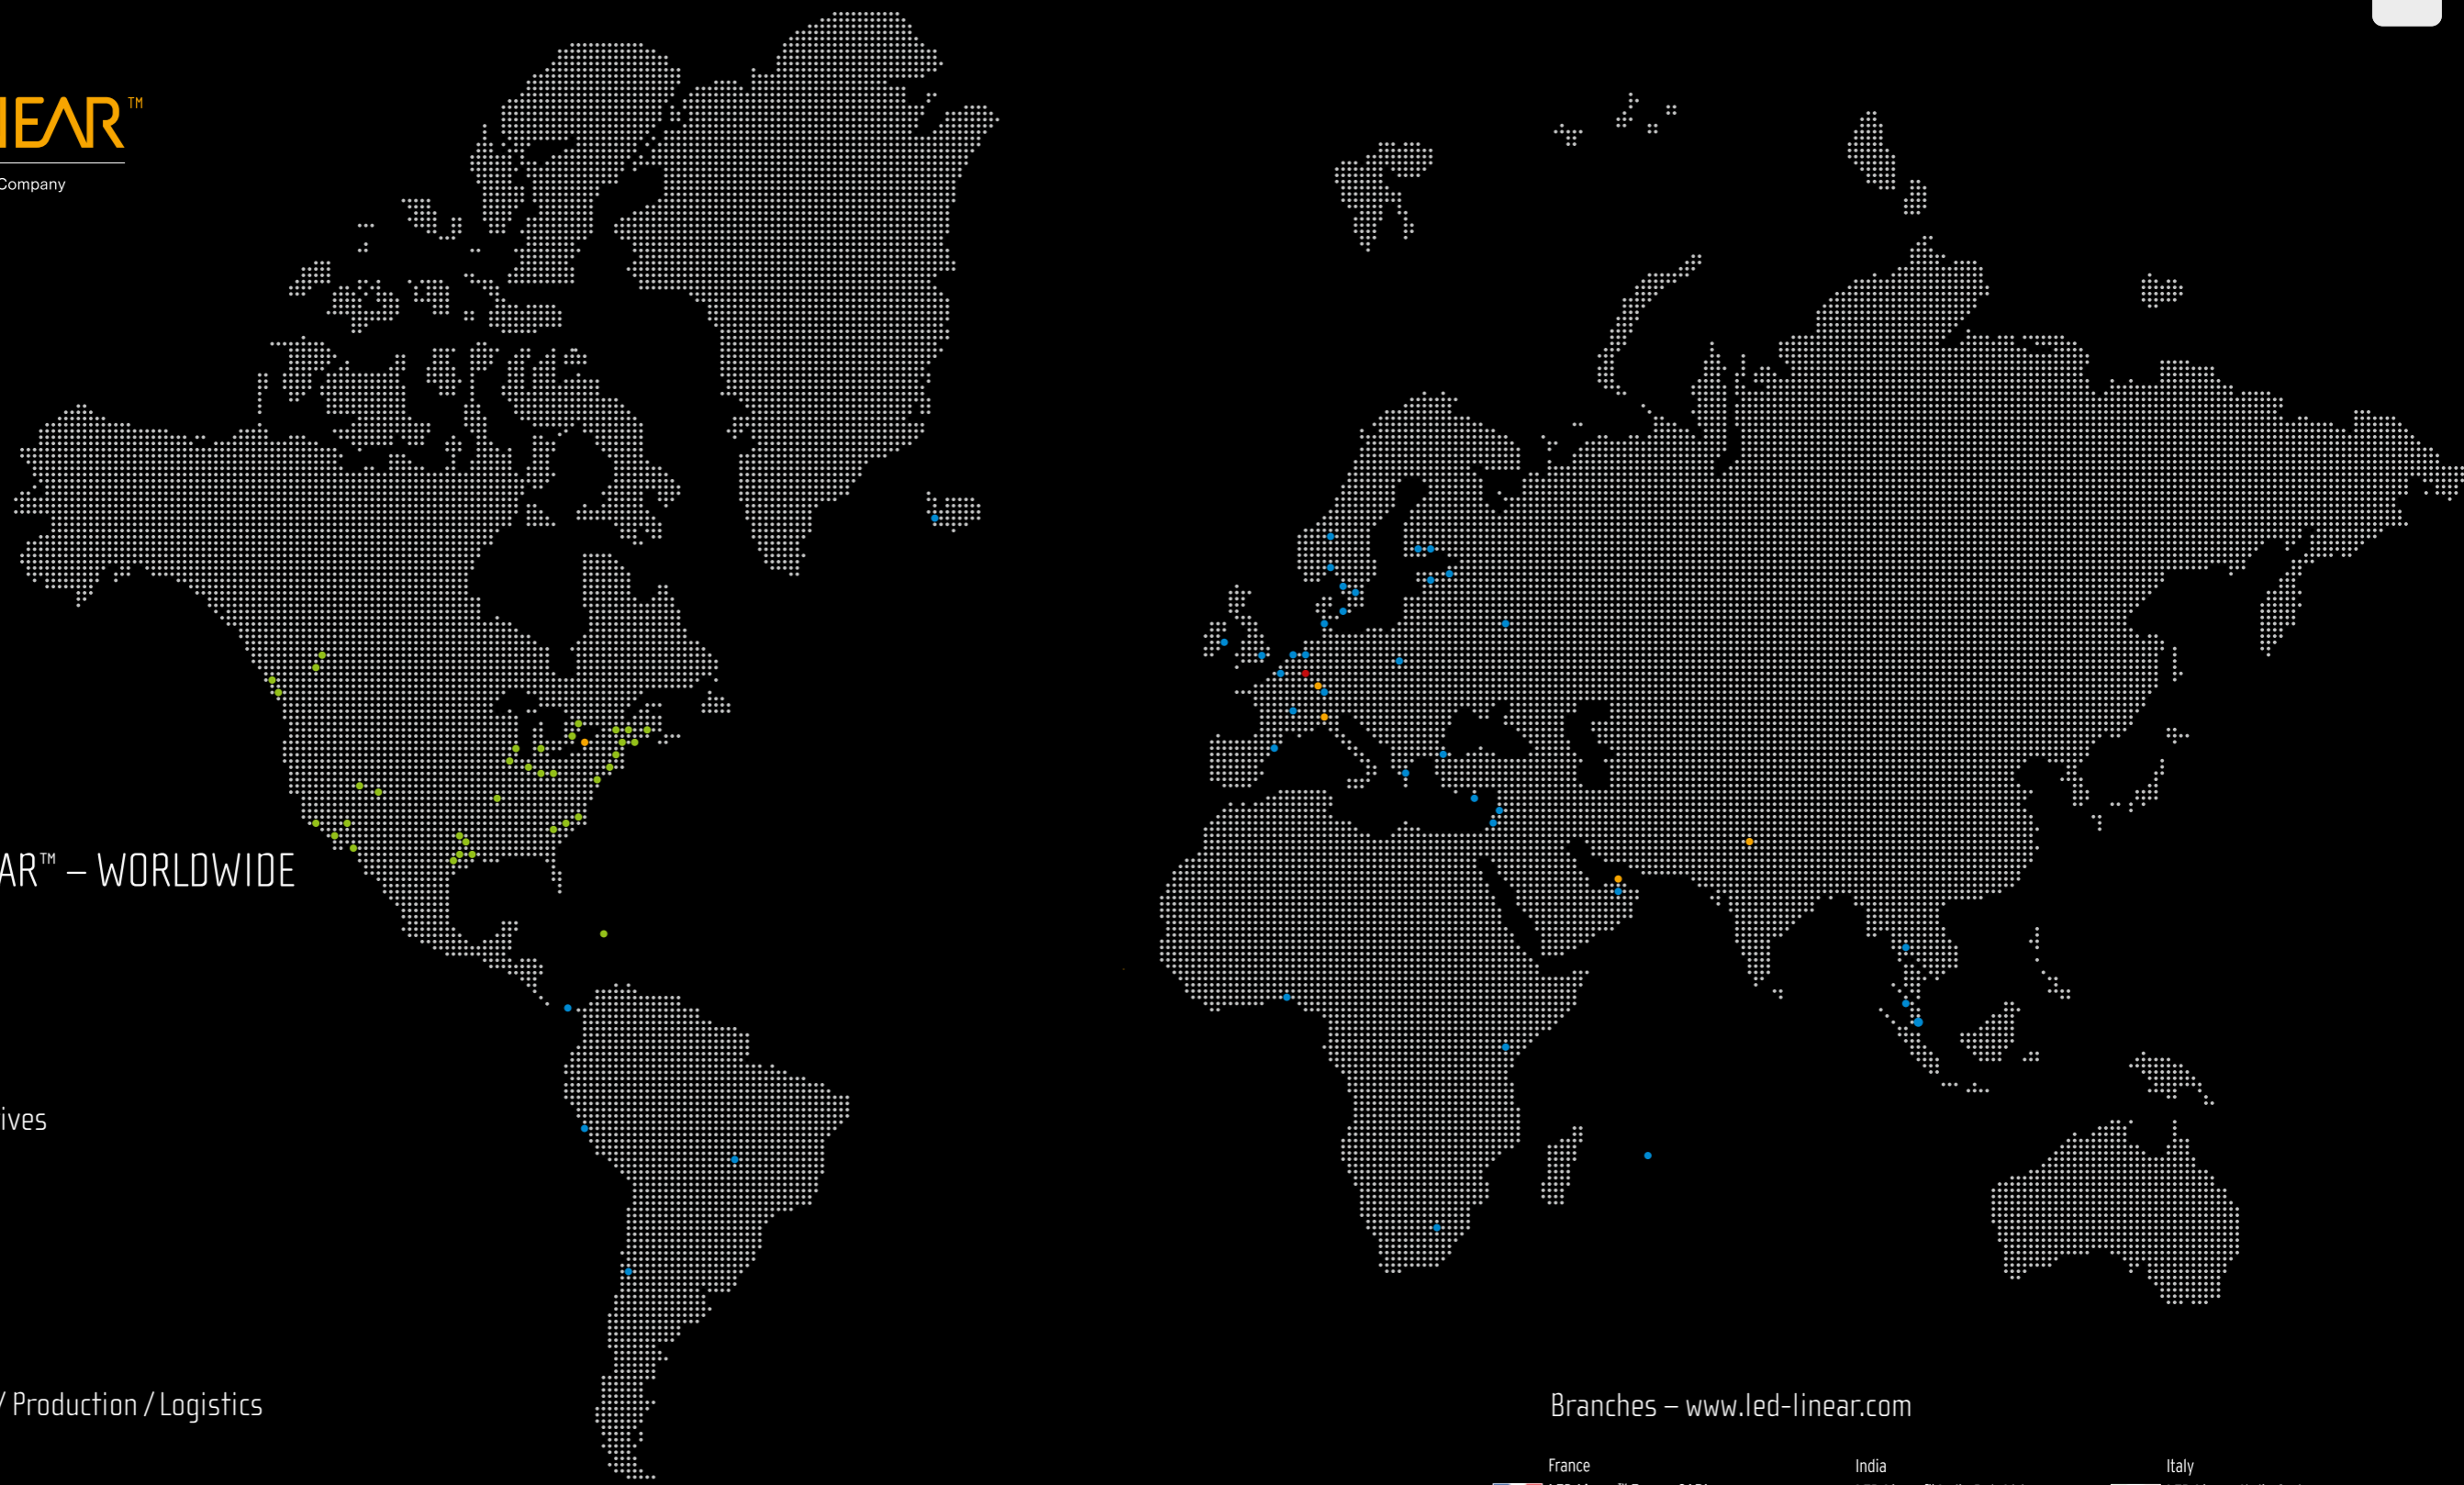

## LED LINEAR™ – WORLDWIDE

- Head office
- Branches
- Distributors
- Representatives

### Head office / Production / Logistics

Germany  
**LED Linear™ GmbH**  
 Dr.-Alfred-Herrhausen-Allee 22  
 47228 Duisburg  
 Phone +49 2065 94322-100  
 Fax +49 2065 94322-120  
 info@led-linear.com  
 www.led-linear.com

An overview of our worldwide distributors can be found online at [www.led-linear.com](http://www.led-linear.com)

### Branches – [www.led-linear.com](http://www.led-linear.com)

France  
**LED Linear™ France SARL**  
 4 rue de Bâle  
 68180 Horbourg Wihr  
 Phone +33 967 055309  
 Fax +33 390 505309  
 France@led-linear.com

India  
**LED Linear™ India Pvt. Ltd**  
 107, Allied House  
 1 Local Shopping Complex  
 Madangir  
 New Delhi - 110062  
 Phone +91 78387 30770  
 India@led-linear.com

Italy  
**LED Linear Italia S.r.l.**  
 Via Gen. Carlo Alberto  
 Dalla Chiesa, 10/41  
 24048 Treviolo (BG)  
 Phone +39 392 391 3567  
 Italy@led-linear.com

United Arab Emirates  
**LED Linear™ Middle East FZC**  
 Technology Park  
 PO Box 16639  
 Ras Al Khaimah  
 Phone +971 50 4565529  
 ME@led-linear.com

USA & South America  
**LED Linear™ USA Inc.**  
 2186 Liberty Drive  
 Niagara Falls,  
 NY 14304  
 Phone +1 716 283 4400  
 USA@led-linear.com

LED Linear™ GmbH  
Dr. Alfred-Herrhausen-Allee 20  
D-47228 Duisburg  
Germany  
Phone +49 2065 94322-100  
Fax +49 2065 94322-120  
info@led-linear.com

For authorized channel partner please view [www.led-linear.com](http://www.led-linear.com)



Art.-# 3300010-01-ENG · Edition 07/2022 · All rights reserved, subject to change.