


TICTOK 75 TRACK

ORDERING CODE: 6635E029-934036D054

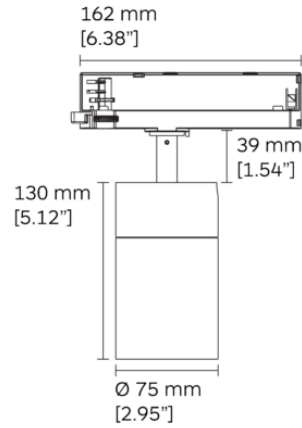

DESCRIPTION

TicTok main voltage track enables users to create unique lighting schemes and configurations. Energy-saving, track mounted on a main voltage 3-phase track system, with an integrated driver in the track adaptor - the focus is on eco-friendly design and modularity. A ready-to-use solution for greater flexibility, energy efficiency, and sustainability. Available in Ø45, Ø58, and Ø75mm spot heads, with versatile aiming angle tiltable 0°-70° and rotatable 360°, Casambi or DALI control options.

TicTok is an excellent and flexible accent lighting solution for restaurants, residential spaces, retail, and galleries.

MOUNTING

Track

DIMMING OPTIONS

D0 - No Dimming



LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE :	LED Module - Narrow Beam - LED
SDCM :	3 STEP
COLOR TEMPERATURE :	40 - 4000K
CRI :	93
IP :	20
LED POWER (W):	18.00
NOMINAL LUMEN (lm):	2066
SYSTEM POWER (W):	20.90
DELIVERED LUMEN (lm):	1713
EFFICACY :	0
BEAM ANGLE (BA°) :	36
CANDELA :	4641
OPTIC TYPE :	LENS

PRODUCT CODE	LED MODULE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DIMMING OPTIONS	FINISH
6635	E029	-	93	40	36	D0	54 - Embossed matt white RAL 9016

ACCESSORIES

	Coloured Glasses Diffuser	2F93
	Opal Lens	2F96
	Spread Lens	2F99
	Elliptical Beam Lens	2F90

We reserve the right to change specifications without prior notification.

TICTOK 75 TRACK

ORDERING CODE: 6635E029-934036D054



Wide Texture
Honeycomb Louvre 2F84



Dense Texture
Honeycomb Louvre 2F87



Cross Blade Louvre 2G03



Barn Doors 2G06



Wallwasher Cone 45° 2G09